



Elektrotechnik Karl-Heinz Mauz GmbH

GM12-N10-10130-298-10D (Artikel-Nr. 860503)

EKULIT

SPECIFICATIONS:

Item	Unit	Specification
Rated voltage	VDC	3.0
Gear Ratio		1/298
Rotation		CW
Motor Position		All position in horizontal
Temperature	°C	0~30
Humidity	%	30~95
• Performance of Motor		
No-load Speed	rpm	23.500±10%
No-load Current	mA	80 (max.)
Stall Current	mA	850 (max.)
Stall Torque	g.cm	7
• Performance of Gear motor		
Output Speed	rpm	80±10%
No-load Current	mA	110 (max.)
Stall Current	mA	850 (max.)
Stall Torque	kg.cm	1.5
Rated Torque	g.cm	500
Rated Current	mA	280 (max.)
Noise	dB	50
• The Dimension		
The Outside Shaft Length	mm	10
Shaft End Play	mm	0.05-0.30
Screw Size		M1.6*0.35
Dia of Shaft	mm	Ø3*2.5mm

Adresse: **Felix-Wankel-Str. 35 • 73760 Ostfildern/Nellingen**

Tel: **+49-711/3414023**


Fax: **+49-711/3414024**

E-mail: **info@ekulit.de** Web site: **www.EKULIT.de**

GM12-N10-10130-298-10D (Artikel-Nr. 860503)

EKULIT

DIMENSIONS :
(Unit: mm)

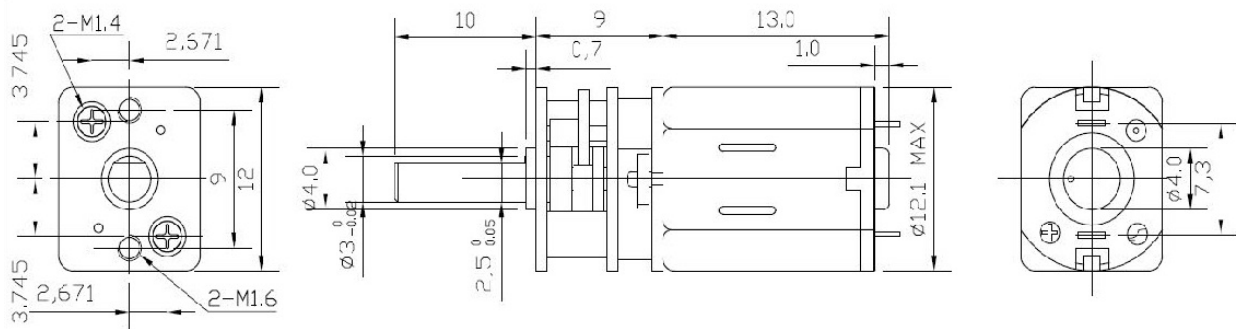

Curve drawings:

