

## Main Feature



1. 2-pole and 4-pole version are available with switching current at 5 Amps (2 Poles & 4 Poles).
2. Printed Circuit Board Terminal, Solder Lug Terminal and Flanged Case are designed for direct panel mounting use.
3. Low coil power consumption with high response time.
4. High reliability and long life with better vibration and shock resistance.
5. Touch Button and LED version are available for customer's selection.



## Contact Rating

Load Type	RE-2P (DM/DB)	RE-2P (D)	RE-4P (DM/DB)	RE-4P (D)
Rated Load (Resistive)	5A 250VAC	5A 250VAC	5A 250VAC	5A 250VAC
	5A 30VDC	5A 30VDC	5A 30VDC	5A 30VDC
Rated Carrying Current	5A	5A	5A	5A
Max. Allowable Voltage	AC 250V	AC 250V	AC 250V	AC 250V
	DC 110V	DC 110V	DC 110V	DC 110V
Max. Allowable Current	5A	5A	5A	5A
Max. Allowable Power Force	600VA	600VA	600VA	600VA
	150W	150W	150W	150W
Contact Material	Ag Alloy	Ag Alloy	Ag Alloy	Ag Alloy
Contact Form	DPST	DPDT	4PST	4PDT

## Application

Vending Machine, Cooking Appliances, Office Machine, Domestic Appliances, Control Equipment... etc.

## Performance (at Initial Value)

- Contact Resistance ..... 100 mΩ Max@1A,6VDC
- Operate Time..... 25 mSec. Max.
- Release Time ..... 25 mSec. Max.
- Dielectric Strength :  
Between Coil & Contact ..... 1,500VAC at 50/60 Hz for one minute.  
Between Contacts ..... 1,000VAC at 50/60 Hz for one minute.
- Surge Strength ..... 3,000V (between Coil & Contact 1.2x50μSec.)
- ..... Insulation Resistance ..... 100 MegaΩ Min. at 500VDC.
- Max. On/Off Switching :  
Electrical..... 6 Cycles per Minute.  
Mechanical ..... 300 Cycles per Minute.
- Temperature Range..... -25 ~ 55°C
- Humidity Range ..... 45 ~ 85% RH.
- Coil Temperature Rise..... 60°C Max.
- Vibration :  
Endurance ..... 10 to 55 Hz dual amplitude width 1.5mm.  
Error Operation..... 10 to 55 Hz dual amplitude width 1.5mm.

- Shock :  
Endurance ..... 1,000 m/S<sup>2</sup> Min.  
Error Operation..... 100 m/S<sup>2</sup> Min.
- Life Expectancy :  
Mechanical ..... 10<sup>7</sup> Operations at No Load condition.  
Electrical ..... 10<sup>5</sup> Operations at Rated Resistive Load.
- Weight ..... About 2 P : 32 g.  
4 P : 35 g.

## Accessories & Sockets

### RE-2P

- PYF-08A/AE ..... See Page 145
- PY-08/-0..... See Page 147
- PYF-08BE & BE/3 ..... See Page 150

### RE-4P

- PYF-14A/AE ..... See Page 145
- PY-14/-0..... See Page 147
- PYF-14BE & BE/3 ..... See Page 150

## Safety Standard & Its File Number

- C-UL..... E141060
- VDE..... 40012699

**Coil Specification (at 20°C)**

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VAC/VDC)	Nominal Current (mA)		Coil Resistance ( $\Omega \pm 10\%$ )	Power Consumption		Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max. Allowable Voltage (VDC)
			50 Hz	60 Hz		50HZ	60HZ			
RE 2P & 4P AC Coil	01	6	282.67	214.33	10	1.7VA	1.29VA	80% Maximum	30% Minimum	110%
	02	12	106.2	94.85	40	1.27VA	1.14VA			
	03	24	52.8	45.45	160	1.27VA	1.09VA			
	04	48	23.65	19.95	600	1.1VA	0.96VA			
	05	110	12.45	10.25	3,400	1.37VA	1.13VA			
	06	120	16.75	14.33	3,400	2.01VA	1.72VA			
	07	220	6.18	5.08	13,600	1.36VA	1.12VA			
	08	240	7.24	5.85	13,600	1.74VA	1.41VA			
	09	230	7.0	5.7	13,600	1.61VA	1.31VA			
RE 2P & 4P DC Coil	01	6	150		40	Abt. 0.9 W		80% Maximum	10% Minimum	110%
	02	12	75.0		160					
	03	24	36.9		650					
	04	48	18.5		2,600					
	05	110	10.0		11,000					
	06	120	10.9		11,000					
	10	60	15.0		4,000					
	07	220	5.0		44,000	Abt. 1.1 W				

**Classification**

Model	RE	
Coil Type	AC Coil	
Number Of Poles	2 Poles	4 Poles
Contact Form	RE-2□□A/AM/AB	RE-4□□A/AM/AB
Terminal Type	RE-2□□A/AM/AB RE-2□□AP/AMP/ABP	RE-4□□A/AM/AB RE-4□□AP/AMP/ABP
Case Type	RE-2□□A/AM/AB RE-2□□AF/AMF/ABF	RE-4□□A/AM/AB RE-4□□AF/AMF/ABF
LED	RE-2□□AL/AML/ABL RE-2□□APL/AMPL/ABPL RE-2□□AFL/AMFL/ABFL	RE-4□□AL/AML/ABL RE-4□□APL/AMPL/ABPL RE-4□□AFL/AMFL/ABFL
Touch Button	RE-2□□AT/AMT/ABT RE-2□□APLT/AMPLT/ABPLT RE-2□□AFLT/AMFLT/ABFLT	RE-4□□AT/AMT/ABT RE-4□□APLT/AMPLT/ABPLT RE-4□□AFLT/AMFLT/ABFLT
Europe Type	RE-2□□ALTU/AMLTU/ABLTU RE-2□□APLTU/AMPLTU/ABPLTU	RE-4□□ALTU/AMLTU/ABLTU RE-4□□APLTU/AMPLTU/ABPLTU
Remark	"LTU" were restricted to be together within European Type ordering	




Model	RE	
Coil Type	DC Coil	
Number Of Poles	2 Poles	4 Poles
Contact Form	RE-2□□D/DM/DB	RE-4□□D/DM/DB
Terminal Type	RE-2□□D/DM/DB RE-2□□DP/DMP/DBP	RE-4□□D/DM/DB RE-4□□DP/DMP/DBP
Case Type	RE-2□□D/DM/DB RE-2□□DF/DMF/DBF	RE-4□□D/DM/DB RE-4□□DF/DMF/DBF
LED	RE-2□□DL(Z/Y/X/V)/DML(Z/Y/X/V)/DBL(Z/Y/X/V) RE-2□□DPL(Z/Y/X/V)/(DMPL(Z/Y/X/V)/DBPL(Z/Y/X/V) RE-2□□DFL(Z/Y/X/V)/DMFL(Z/Y/X/V)/DBFL(Z/Y/X/V)	RE-4□□DL(Z/Y/X/V)/DML(Z/Y/X/V)/DBL(Z/Y/X/V) RE-4□□DPL(Z/Y/X/V)/DMPL(Z/Y/X/V)/DBPL(Z/Y/X/V) RE-4□□DFL(Z/Y/X/V)/DMFL(Z/Y/X/V)/DBFL(Z/Y/X/V)
Touch Button	RE-2□□DT/DMT/DBT RE-2□□DPL(Z/Y/X/V)T/DMPL(Z/Y/X/V)T/DBPL(Z/Y/X/V)T RE-2□□DFL(Z/Y/X/V)T/DMFL(Z/Y/X/V)T/DBFL(Z/Y/X/V)T	RE-4□□DT/DMT/DBT RE-4□□DPL(Z/Y/X/V)T/DMPL(Z/Y/X/V)T/DBPL(Z/Y/X/V)T RE-4□□DFL(Z/Y/X/V)T/DMFL(Z/Y/X/V)T/DBFL(Z/Y/X/V)T
Europe Type	RE-2□□DL(Z/Y/X/V)TU/DML(Z/Y/X/V)TU/DBL(Z/Y/X/V)TU RE-2□□DPL(Z/Y/X/V)TU/DMPL(Z/Y/X/V)TU/DBPL(Z/Y/X/V)TU	RE-4□□DL(Z/Y/X/V)TU/DML(Z/Y/X/V)TU/DBL(Z/Y/X/V)TU RE-4□□DPL(Z/Y/X/V)TU/DMPL(Z/Y/X/V)TU/DBPL(Z/Y/X/V)TU
Remark	"LTU" were restricted to be together within European Type ordering	

## Ordering Information


RE - 2 - 01 D M P F L T U - N	Contact Material code:	Nil: AgSnO <sub>2</sub> S: AgSnO <sub>2</sub> gilded K: AgSnO <sub>2</sub> Au+Plated I: AgNi G: AgNi gilded O: AgNi Au+Plated C: AgCdO W: AgCdO gilded
	European Type:	Nil: Standard RE Relay U: European Type (Indicator, topside lockable test button, Smoked transparent case)
	Touch Button:	Nil: Standard Relay T: With Touch Button Selection
	Internal Connections:	Nil: Standard Relay L: With LED Selection (Use no polarity LED) Z: Coil parallel with diode IN4007 the Positive pole "+" On #14 terminal Y: Coil parallel with diode IN4007 the Negative pole "- " On #14 terminal X: Coil parallel with diode IN4007 + LED the Positive pole "+" On #14 terminal V: Coil parallel with diode IN4007 + LED the Negative pole "- " On #14 terminal (Z, Y, X, V, Only VDC Coil) (Diode IN4007 Only coil voltage under 60VDC) (Coil voltage 110V and 120V use diode R1500)
	Case Type:	Nil: Standard Square Shape F: Flanged Case (RE Relay Only)
	Terminal Type:	Nil: Solder Lug Terminal P: PC Board Terminal
	Contact Form:	Nil: 1 Form C M: 1 Form A B: 1 Form B
	Coil Type:	D: DC Coil A: AC Coil
	Coil Code:	01: 6V, 02: 12V, 03: 24V, 04: 48V, 05: 110V, 06: 120V, 07: 220V, 08: 240V, 09: 230V, 10: 60V
	Number of Pole:	2: 2 Poles 4: 4 Poles
	Type:	RE

Dimension ( $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , the tolerance of PCB thru hole:  $+0.1\text{mm}$ )

RE-2-P


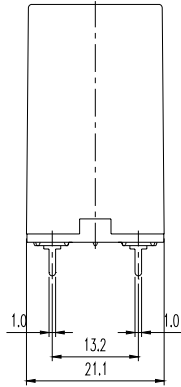
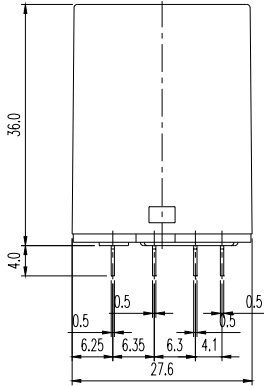


BOTTOM VIEW




BOTTOM VIEW

RE-2


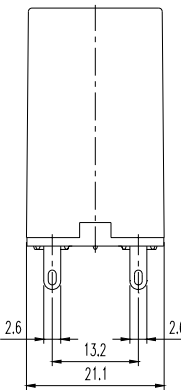
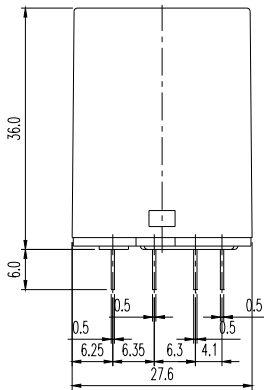


BOTTOM VIEW




BOTTOM VIEW

RE-4-P


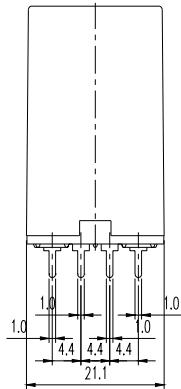
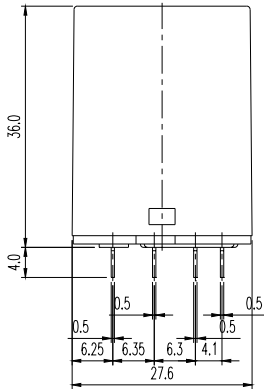


BOTTOM VIEW




BOTTOM VIEW

## RE-4



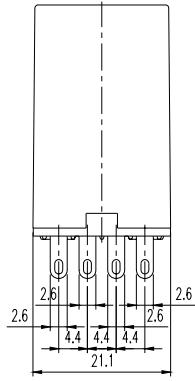
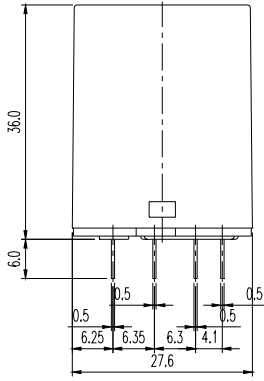


BOTTOM VIEW




BOTTOM VIEW

## RE-2-F



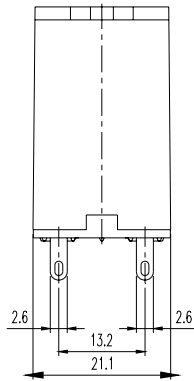
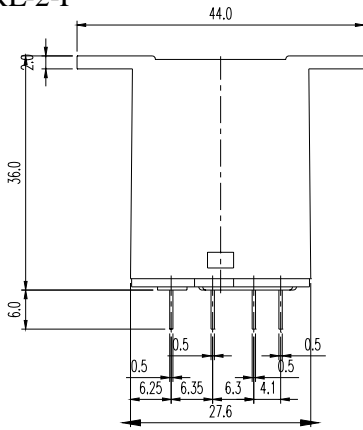


BOTTOM VIEW




BOTTOM VIEW

## RE-4-F

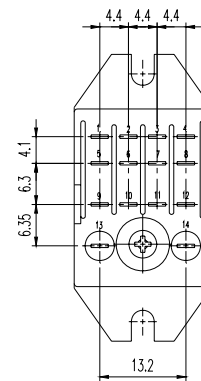
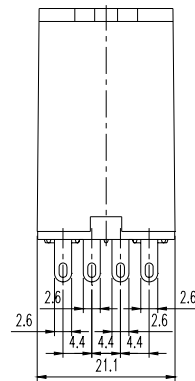
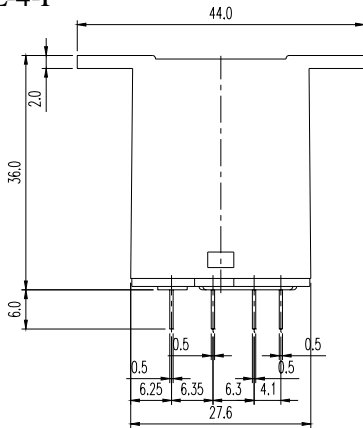


BOTTOM VIEW




BOTTOM VIEW

RE-2xxU


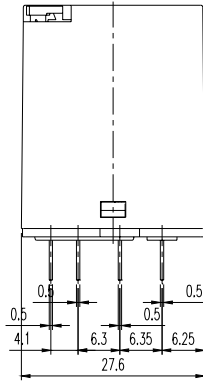
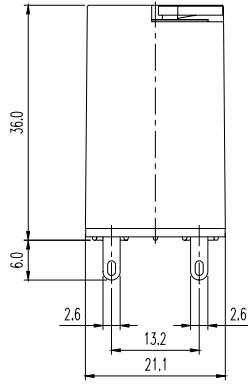


BOTTOM VIEW




BOTTOM VIEW

RE-4xxU

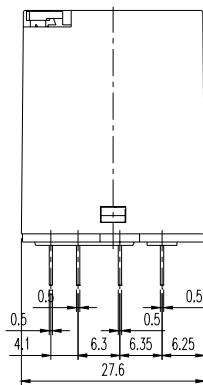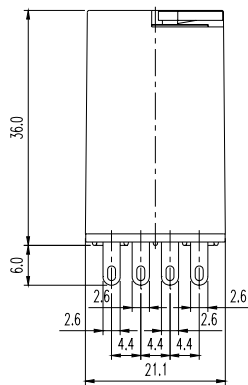

BOTTOM VIEW



BOTTOM VIEW

※For European Type, only “LTU” available in classification.

Wiring diagrams (Bottom view)

RE-2p		
DCV Model for Asia	DCV Model for Europe	ACV Model
RE-4p		
DCV Model for Asia	DCV Model for Europe	ACV Model