

**DISPLAY Elektronik GmbH**

**DATA SHEET**

**BACKLIGHT**

**DE LP-508-RGB**

*Product Specification*

*Version: 1*

**18.10.2016**

# GENERAL SPECIFICATION

---

MODEL NO. :

## DE LP-508-RGB

CUSTOMER P/N

Version No.	Change Description	Date
0	Original Version	12.10.2016
1	Change Electrical / Optical Specification	18.10.2016

PREPARED BY: ZX

DATE: 18.10.2016

APPROVED BY: MH

DATE: 18.10.2016

**CONTENTS**

**1. FEATURES .....2**

**2. EXTERNAL DIMENSION (UNIT: MM).....2**

**3. ELECTRICAL/OPTICAL SPECIFICATIONS.....3**

**4. ACCEPT QUALITY LEVEL (AQL). ..... FEHLER! TEXTMARKE NICHT DEFINIERT.**


**5. RELIABILITY TEST..... FEHLER! TEXTMARKE NICHT DEFINIERT.**

**1. FEATURES**

Backlight Color: RGB

RoHS: Conformed

**2. EXTERNAL DIMENSION (unit: mm)**

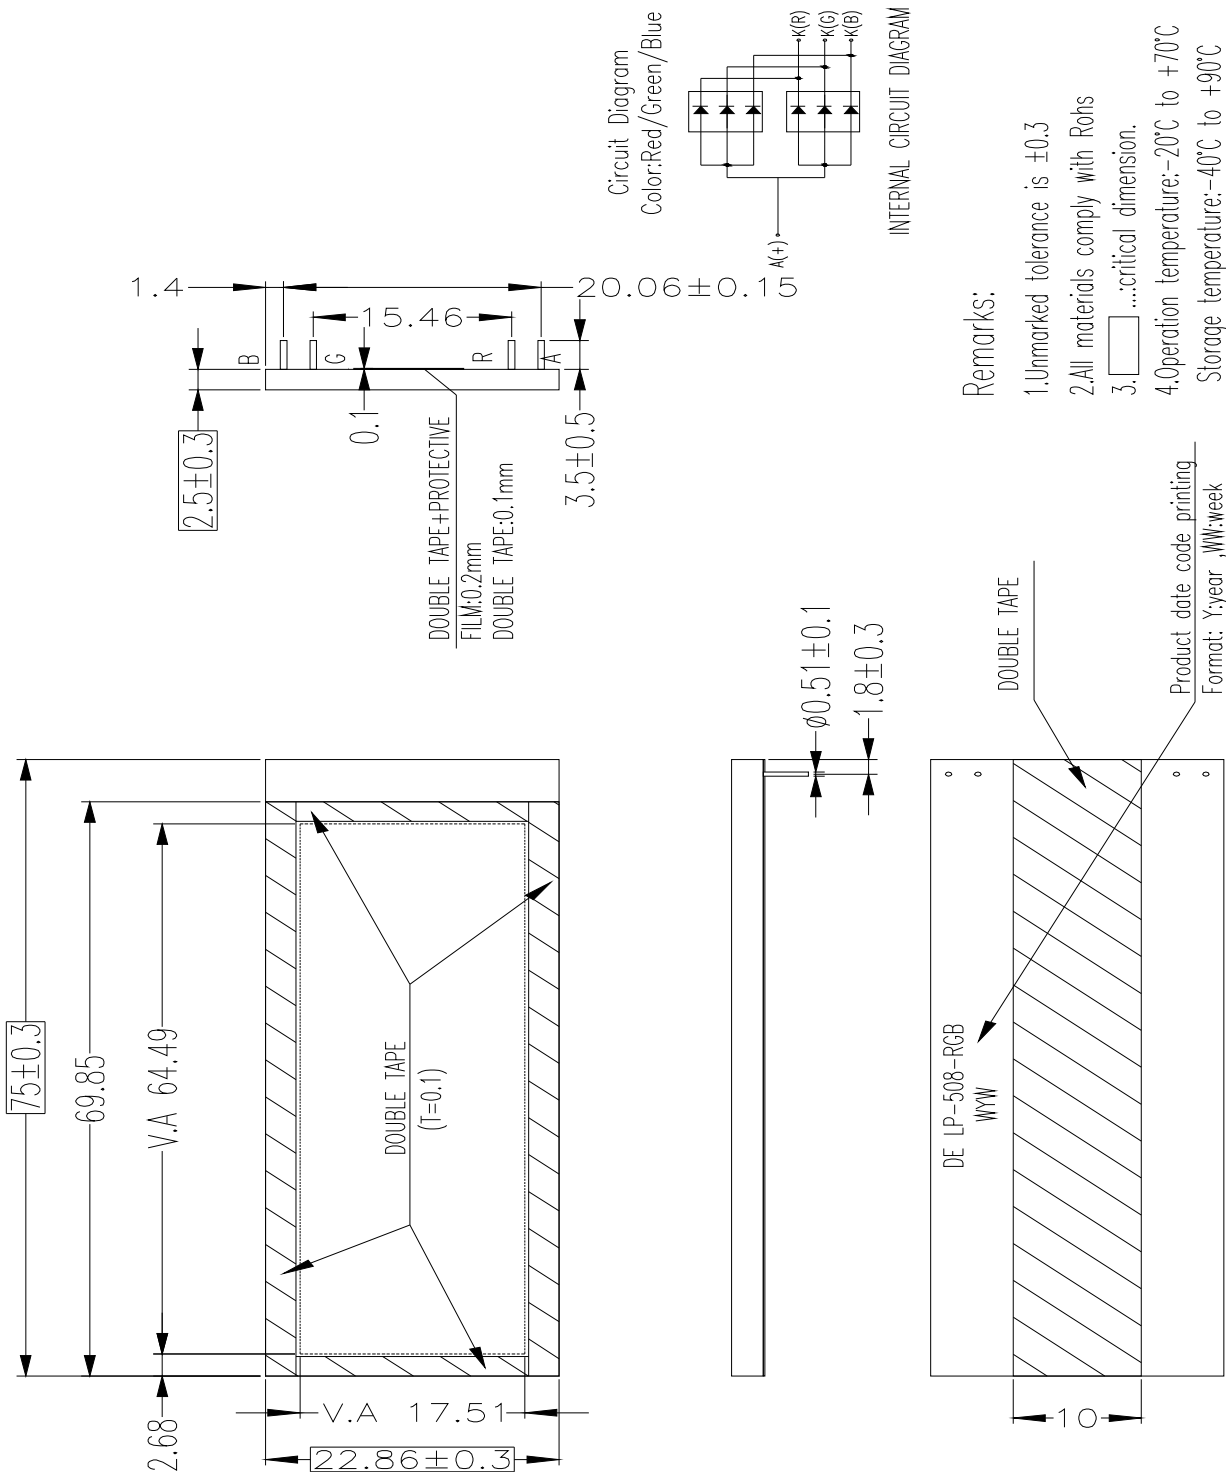

**3. ELECTRICAL/OPTICAL SPECIFICATIONS**

Electronics/Optical Specifications:

Ta=25°C. Unless specified, The Ambient temperature Ta=25°C

Item	Symbol	RED			GREEN			BLUE			Unit	Condition
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Forward Current	Vf	1.9	2.1	2.5	2.8	3.0	3.4	2.9	3.1	3.5	mA	If=20*2mA
Dominant Wave Length	λD	620	625	630	515	520	525	465	470	475	nm	If=20*2mA
Color Chromaticity	X	—	—	—	—	—	—	—	—	—		
	Y	—	—	—	—	—	—	—	—	—		
Uniformity	Avg	65			65			65			%	
Luminance	Lv	200	280		400	545		75	150		cd/m²	
Reverse Current (Per LED)	Ir			10			10			10	μA	Vr= 5.0 V
Lifetime		50000(brightness reduce half)										

**4. ACCEPT QUALITY LEVEL (AQL).**

4.1. AQL standard value: Critical defect =0, Major defect=0.65; Minor defect =2.5.

4.2. Inspection Plan: ANSI Z-1.4, Normal Inspection Level II, Single Sampling Plan.

**5. RELIABILITY TEST**

Test Item	Test Condition
High Temperature Storage	+90°C x 96h
Low temperature Storage	-40°C x 96h
High Temperature Operation	+70°C x 96h
Low Temperature Operation	-20°C x 96h
High Temperature, High Humidity	60°C x 90%RH x 4 Weeks
Thermal Shock	-20°C x 30min → 25°C x 10s → +70°C x 30min x 5 Cycles
Vibration Test	Frequency x Swing x Time 40Hz x 4mm x 4h
Drop Test	Height x Number of drop 1.0m x 6 drops