



# Photocoupler

## Product Data Sheet

### LTV-725F

(M, S, S-TA, S-TA1) series

Spec No.: DS-70-99-0016

Effective Date: 07/01/2016

Revision: C

**LITE-ON DCC**

**RELEASE**

BNS-OD-FC001/A4

## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 1. DESCRIPTION


#### 1.1 Features

- High collector-emitter voltage ( $V_{CE0}=300V$ )
- High input-output isolation voltage ( $V_{ISO}=5,000V_{rms}$ )
- Current transfer ratio (CTR : MIN. 1000% at  $I_F = 1mA$ ,  $V_{CE} = 2V$ )
- Dual-in-line package :  
LTV-725F
- Wide lead spacing package  
LTV-725FM
- Surface mounting package  
LTV-725FS
- Tape and reel packaging  
LTV-725FS-TA, LTV-725FS-TA1
- Safety approval
  - \* UL approved (No. E113898)
  - \* TUV approved (No. R9653630)
  - \* CSA approved (No. CA91533-1)
  - \* FIMKO approved (No. 209049)
  - \* NEMKO approved (No. P99102464)
  - \* DEMKO approved (No. 99-04182)
  - \* SEMKO approved (No. 9943380 / 01-20)
  - \* VDE approved (No. 094722)
- RoHS Compliance  
All materials be used in device are followed EU RoHS directive (No.2002/95/EC).
- ESD pass HBM 8000V/MM2000V
- MSL class1


## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 2. PACKAGE DIMENSIONS


#### 2.1 LTV-725F

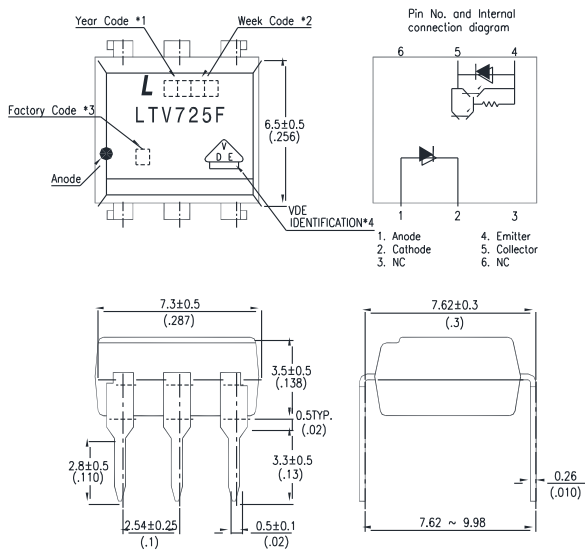

#### 2.2 LTV-725FM

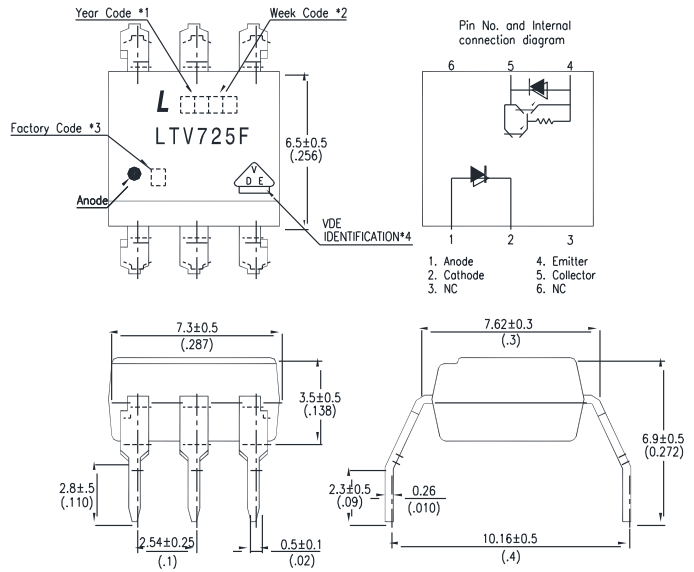

#### 2.3 LTV-725FS

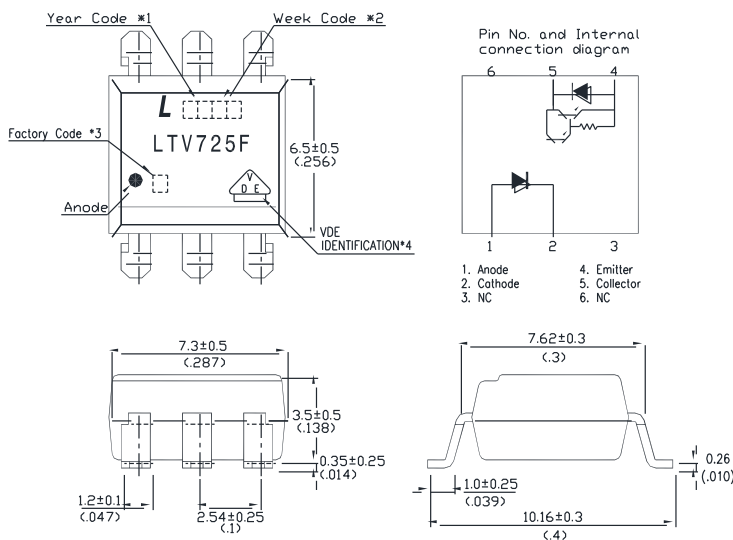

#### Notes :


1. Year date code.
2. 2-digit work week.
3. Factory identification mark shall be marked (Y: Thailand, W: China-CZ).
4. For VDE option.

Dimensions in millimeters (inches).


## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 3. TAPING DIMENSIONS

#### 3.1 LTV-725FS-TA

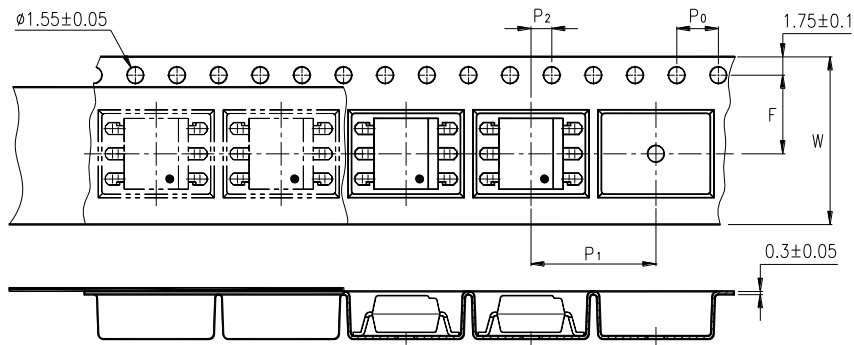

#### 3.2 LTV-725FS-TA1

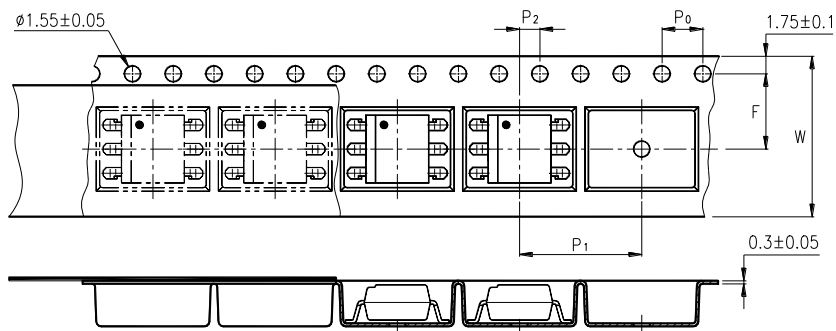

Description	Symbol	Dimension in mm (inch)
Tape wide	W	16±0.3 (0.63)
Pitch of sprocket holes	P <sub>0</sub>	4±0.1 (0.15)
Distance of compartment	F	7.5±0.1 (0.295)
	P <sub>2</sub>	2±0.1 (0.079)
Distance of compartment to compartment	P <sub>1</sub>	12±0.1 (0.472)

#### 3.3 Quantities Per Reel

Package Type	TA / TA1
Quantities (pcs)	1000

## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 4. RATING AND CHARACTERISTICS

#### 4.1 Absolute Maximum Ratings at Ta=25°C

	Parameter	Symbol	Rating	Unit
Input	Forward Current	$I_F$	50	mA
	Reverse Voltage	$V_R$	6	V
	Power Dissipation	$P$	70	mW
	Junction Temperature	$T_J$	125	°C
Output	Collector - Emitter Voltage	$V_{CEO}$	300	V
	Emitter - Collector Voltage	$V_{ECO}$	0.1	V
	Collector Current	$I_C$	150	mA
	Collector Power Dissipation	$P_C$	300	mW
	Total Power Dissipation	$P_{tot}$	350	mW
1.	Isolation Voltage	$V_{iso}$	5000	$V_{rms}$
	Operating Temperature	$T_{opr}$	-25 ~ +100	°C
	Storage Temperature	$T_{stg}$	-45 ~ +125	°C
2.	Soldering Temperature	$T_{sol}$	260	°C

1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.

2. For 10 Seconds

## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

Parameter		Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input	Forward Voltage	$V_F$	—	1.2	1.4	V	$I_F=10\text{mA}$
	Reverse Current	$I_R$	—	—	10	$\mu\text{A}$	$V_R=4\text{V}$
	Terminal Capacitance	C	—	30	250	pF	$V=0, f=1\text{MHz}$
Output	Collector Dark Current	$I_{CEO}$	—	—	1	$\mu\text{A}$	$V_{CE}=200\text{V}, I_F=0$
	Collector-Emitter Breakdown Voltage	$BV_{CEO}$	300	—	—	V	$I_C=0.1\text{mA}, I_F=0$
	Emitter-Collector Breakdown Voltage	$BV_{ECO}$	0.1	—	—	V	$I_E=10\mu\text{A}, I_F=0$
Couple	Collector Current	$I_C$	10	40	150	mA	$I_F=1\text{mA}, V_{CE}=2\text{V}$
	1. Current Transfer Ratio	CTR	1,000	4,000	15,000	%	
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	1.2	V	$I_F=20\text{mA}$ $I_C=100\text{mA}$
	Isolation Resistance	$R_{ISO}$	$5 \times 10^{10}$	$10^{11}$	—	$\Omega$	DC500V, 40 ~ 60%.R.H.
	Floating Capacitance	$C_f$	—	0.6	1	pF	$V=0, f=1\text{MHz}$
	Cut-Off Frequency	$f_c$	1	7	—	kHz	$V_{CE}=2\text{V}, I_C=20\text{mA}$ $R_L=100\Omega, -3\text{dB}$
	Response Time (Rise)	$t_r$	—	100	300	$\mu\text{s}$	$V_{CE}=2\text{V}, I_C=20\text{mA}$
	Response Time (Fall)	$t_f$	—	20	100	$\mu\text{s}$	$R_L=100\Omega$

$$1. \text{ CTR} = \frac{I_C}{I_F} \times 100\%$$

# Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

## 5. CHARACTERISTICS CURVES

Fig.1 Forward Current vs. Ambient Temperature

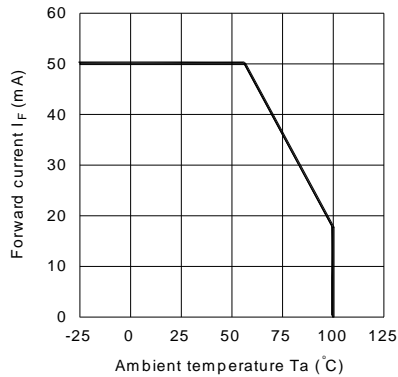


Fig.2 Collector Power Dissipation vs. Ambient Temperature

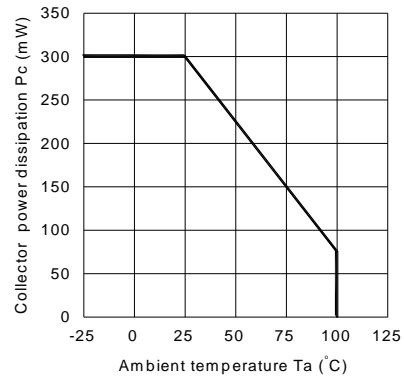


Fig.3 Forward Current vs. Forward Voltage

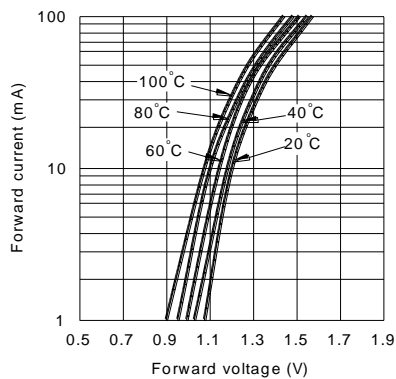


Fig.4 Current Transfer Ratio vs. Forward Current

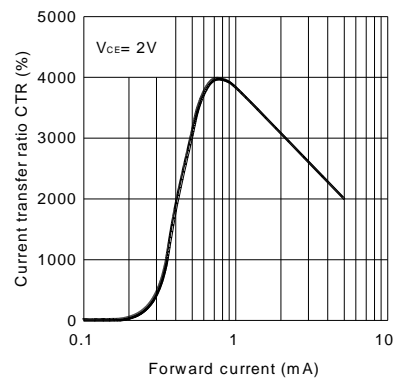


Fig.5 Collector Current vs. Collector-emitter Voltage


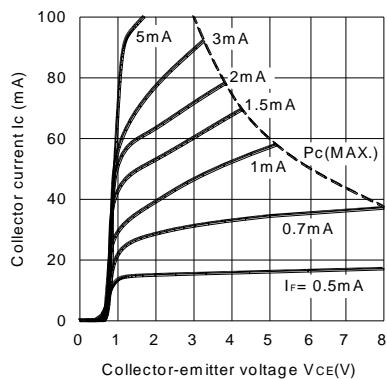


Fig.6 Relative Current Transfer Ratio vs. Ambient Temperature

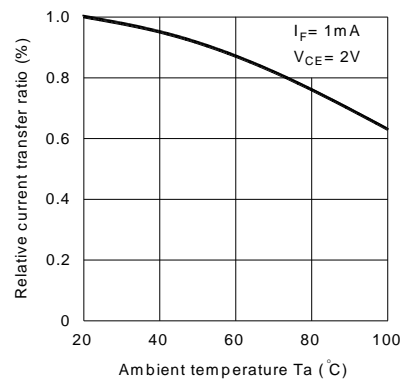

# Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

Fig.7 Collector-emitter Saturation Voltage vs. Ambient Temperature

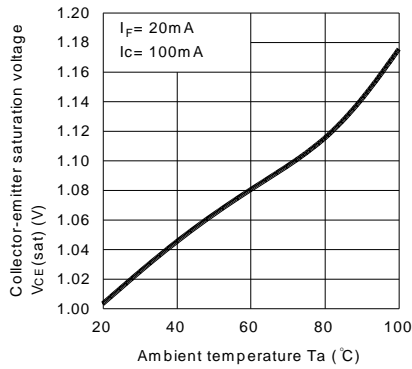


Fig.8 Collector Dark Current vs. Temperature

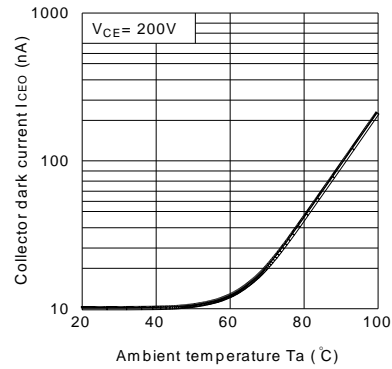


Fig.9 Response Time vs. Load Resistance



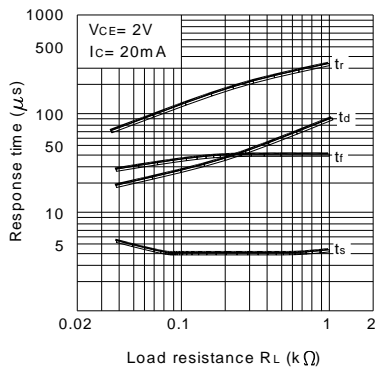



Fig.10 Frequency Response

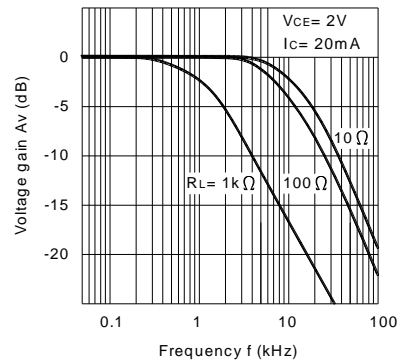

Test Circuit for Response Time

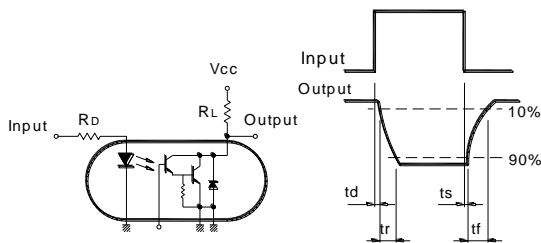

Test Circuit for Frequency Response

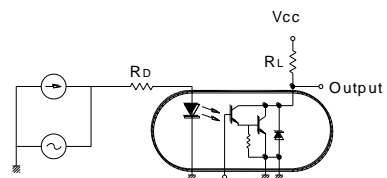




## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 6. TEMPERATURE PROFILE OF SOLDERING

#### 6.1 IR Reflow soldering (JEDEC-STD-020C compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

Profile item	Conditions
Preheat	
- Temperature Min ( $T_{Smin}$ )	150°C
- Temperature Max ( $T_{Smax}$ )	200°C
- Time (min to max) (ts)	90±30 sec
Soldering zone	
- Temperature ( $T_L$ )	217°C
- Time ( $t_L$ )	60 sec
Peak Temperature ( $T_P$ )	260°C
Ramp-up rate	3°C / sec max.
Ramp-down rate	3~6°C / sec

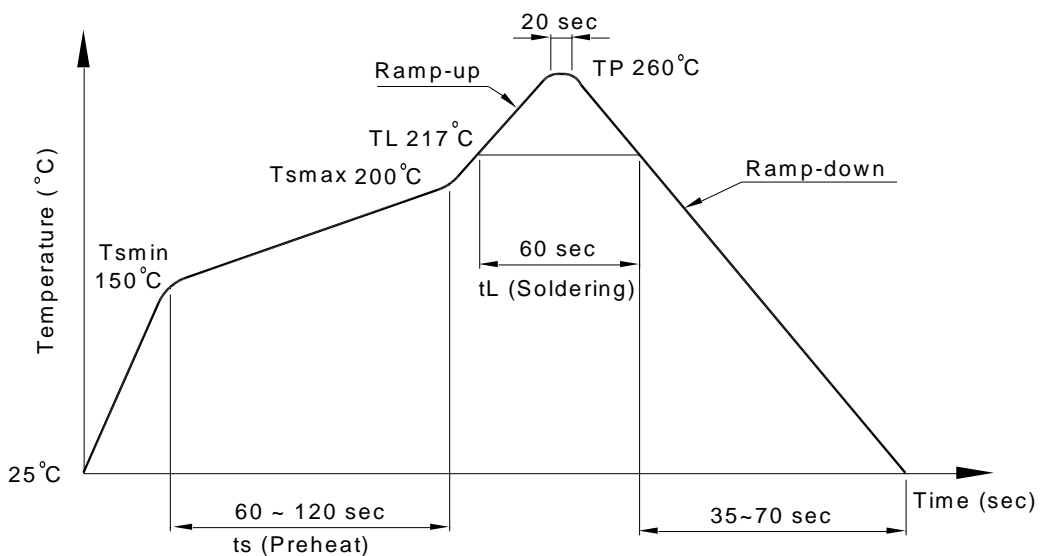

## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series

### 6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature:  $260+0/-5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to  $140^{\circ}\text{C}$

Preheat time: 30 to 80 sec.

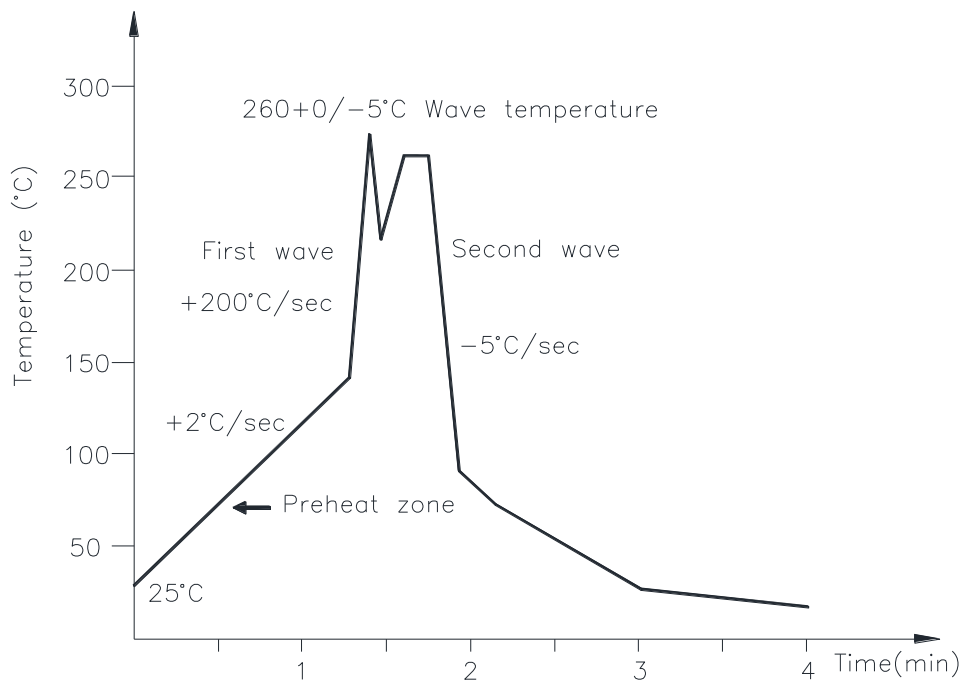

### 6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature:  $380+0/-5^{\circ}\text{C}$

Time: 3 sec max.

**Photocouplers**  
**LTV-725F (M, S, S-TA, S-TA1) series**

**7. RRECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)**


Unit: mm

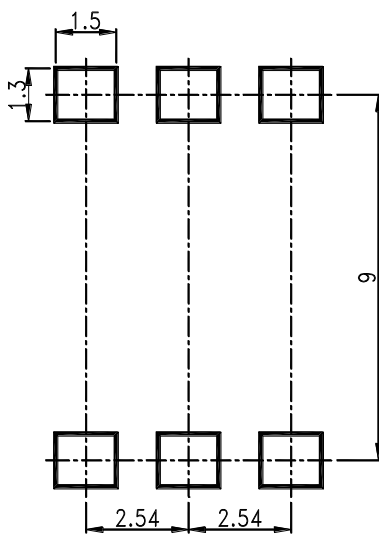

## Photocouplers LTV-725F (M, S, S-TA, S-TA1) series


### 8. NAMING RULE

# LTV-725F(1)-(2)

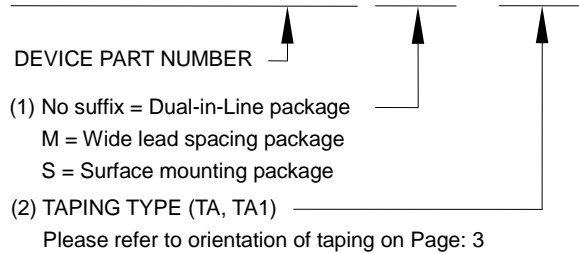

Example : LTV-725FS-TA1

# LTV725F(1)(2)-V

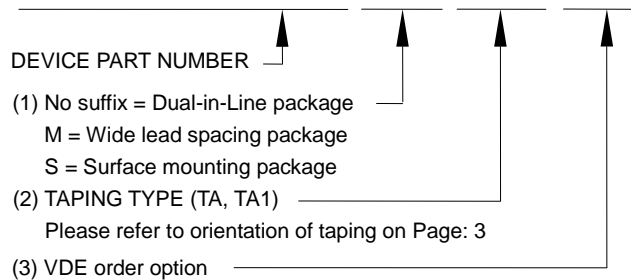

Example : LTV725FSTA1-V

### 9. NOTES

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.