Pin Header with Turned Contacts 1,27 mm

Series **192**

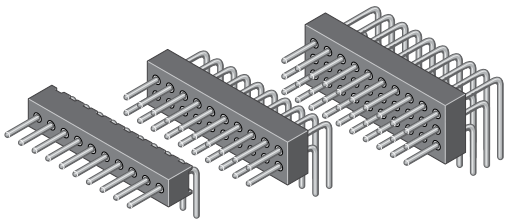

Rated current	1,0 A
Rated voltage	100 VRMS / VDC
Withstand voltage	300 VRMS for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch **1,27**

termination

contact size **ø 0,41**

max. pincount **050/100/150**

Product group **3**

Variation

1

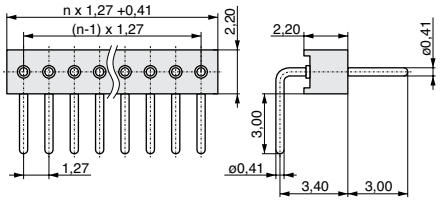

PCB Layout



2

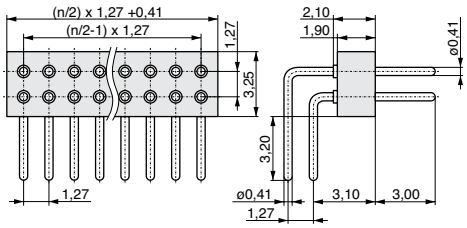

PCB Layout



3

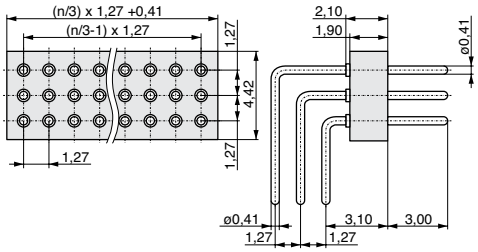

PCB Layout



4

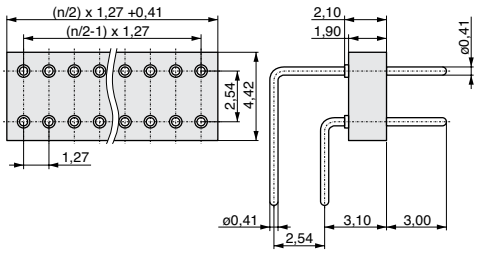

PCB Layout



Plating:
T = Sn
F = Au

* No. of contacts:
Variation 1 = 002 - 050
Variation 2 = 004 - 100
Variation 3 = 009 - 150
Variation 4 = 004 - 100

Variation (1,2,3,4) | No. of contacts * (002,... - 150) | Plating contact (T,F)

mpe GARRY

www.mpe-connector.de

Order code: 192-?-???-0-?-LS0

Mating series	200	204	208
see page	4-9	4-10	4-11

MPE-Garry GmbH • Schäfflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de