


Female Header with Turned Contacts 1,27 mm

Series

204

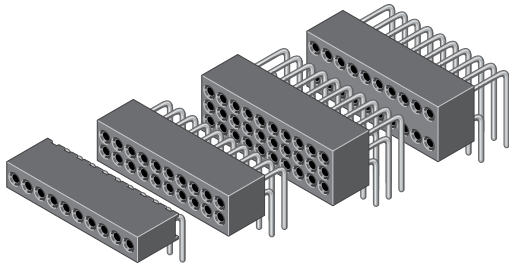

Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for one minute
Material contact	Copper alloy
Material clip	Beryllium copper
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds


pitch	1,27
termination	
mating pin size	ø 0,38-0,50
max. pincount	050/100/150

All dimensions in mm.



Variation

PCB Layout



Product group
4

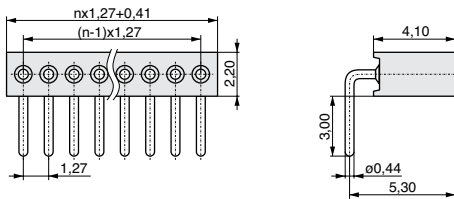



1

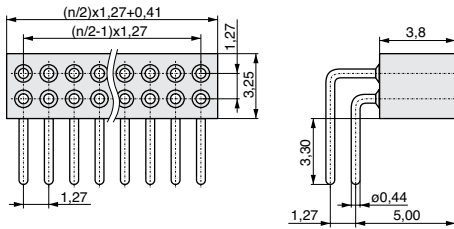


2

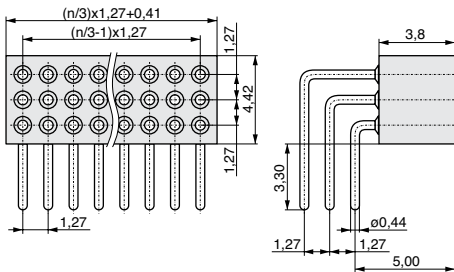

3

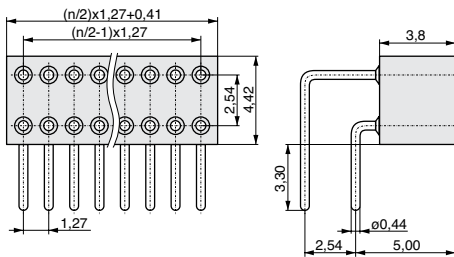

4



Clip style:
H = 3 finger clip

Plating:
T = Sn
F = Au
H = Au 0,75 μ

* No. of contacts:
Variation 1 = 002 - 050
Variation 2 = 004 - 100
Variation 3 = 009 - 150
Variation 4 = 004 - 100

Variation (1,2,3,4)

No. of contacts *
(002,... - 150)

Clip style
Plating contact
Plating clip (F,H)



www.mpe-connector.de

Order code:

204 - 2 - 222 - 0 - HT 2 - L S 0

Mating series	188	192	196
see page	3-16	3-18	3-18