

## Photocoupler LTV-808X series

### 1. DESCRIPTION

#### 1.1 Features

- Isolation voltage between input and output Viso : 5,000 Vrms
- 4pin DIP Zero-cross photocoupler, triac driver output
- High repetitive peak off-state voltage  $V_{DRM}$  : Min. 800V
- High critical rate of rise of off-state voltage (  $dV/dt$  : MIN. 1000V /  $\mu$ s )
- Safety approval  
UL 1577  
VDE DIN EN60747-5-5 (VDE 0884-5)  
cUL CA5A  
CQC GB4943.1-2011/ GB8898-2011 (meet Altitude up to 5000m)  
Nordic Safety ( DEMKO)


#### 1.2 Applications

- AC Motor Drives
- AC Motor Starters
- E.M. Contactors
- Lighting Controls
- Solenoid/Valve Controls
- Solid State Relays
- Static Power Switches
- Temperature Controls


## Photocoupler LTV-808X series

### 2. PACKAGE DIMENSIONS


#### 2.1 LTV-808X

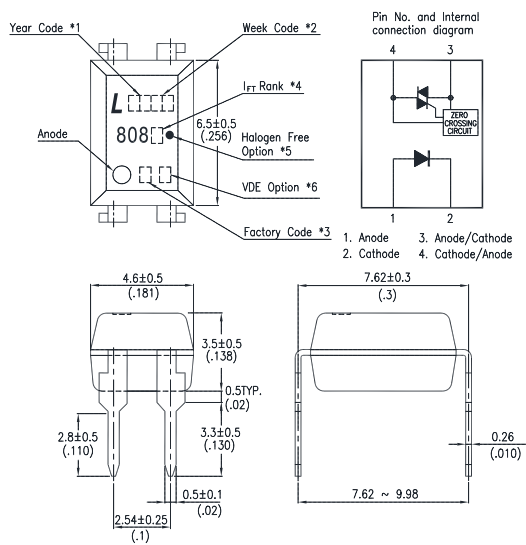

#### 2.2 LTV-808XM

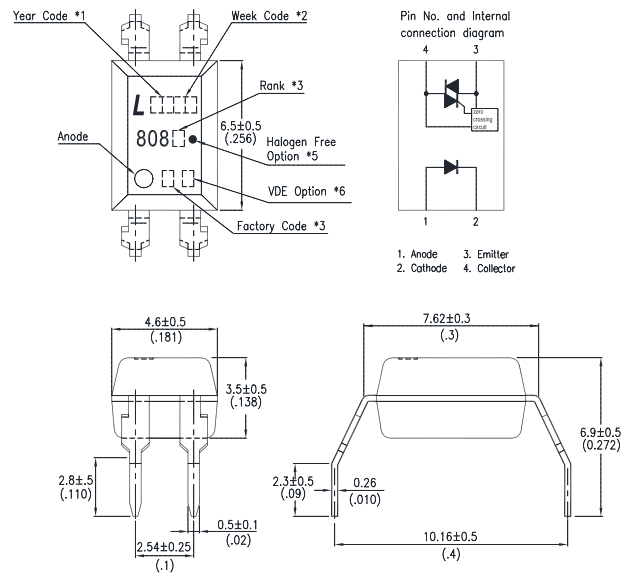

#### 2.3 LTV-808XS

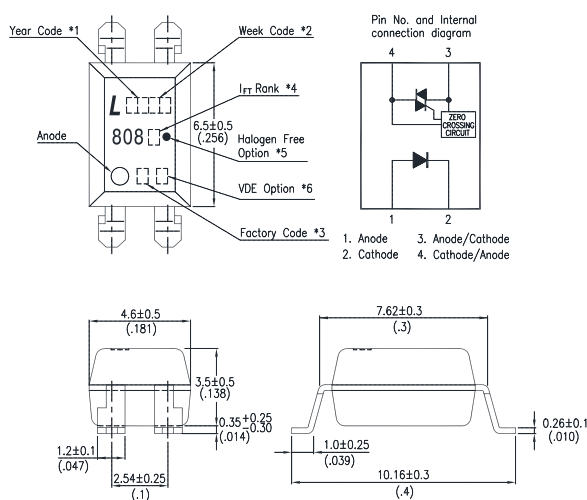

#### Notes :


- 2-digit year code, example : 2016 = 16
- 2-digit work week ranging from '01' to '53'
- Factory identification mark shall be marked (W: China-CZ, Y: Thailand)
- IFT Rank
- "●" for halogen free option.
- "4" or "V" for VDE option.

\*Dimensions in millimeters (inches).


**Photocoupler  
LTV-808X series**

**3. TAPING DIMENSIONS**

**3.1 LTV-808XS-TA**

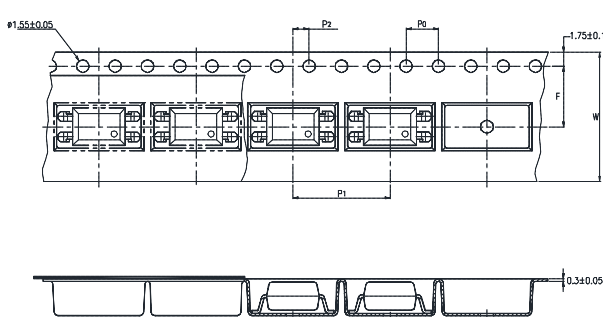

**3.2 LTV-808XS-TA1**

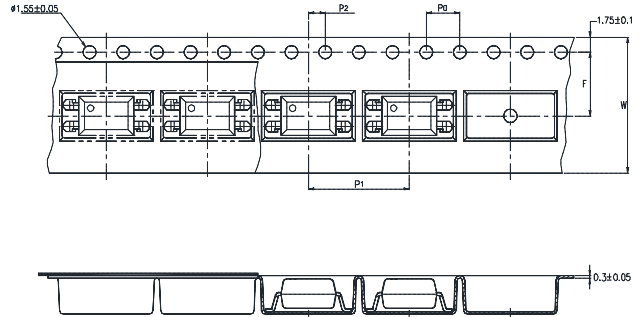


| Description                            | Symbol         | Dimension in mm (inch) |
|--|----------------|------------------------|
| Tape wide                              | W              | 16±0.3 (0.63)          |
| Pitch of sprocket holes                | P <sub>0</sub> | 4±0.1 (0.15)           |
| Distance of compartment                | F              | 7.5±0.1 (0.295)        |
|  | P <sub>2</sub> | 2±0.1 (0.079)          |
| Distance of compartment to compartment | P <sub>1</sub> | 12±0.1 (0.472)         |

**3.3 Quantities Per Reel**

| Package Type     | TA/TA1 |
|------------------|--------|
| Quantities (pcs) | 1000   |

## Photocoupler LTV-808X series

### 3.4 LTV-808XS-TP

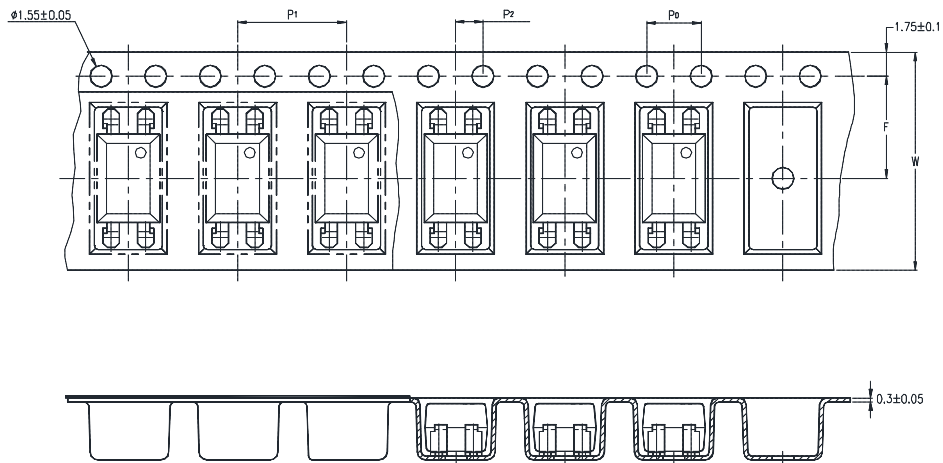

| Description                            | Symbol         | Dimension in mm (inch) |
|--|----------------|------------------------|
| Tape wide                              | W              | 16±0.3 (0.63)          |
| Pitch of sprocket holes                | P <sub>0</sub> | 4±0.1 (0.15)           |
| Distance of compartment                | F              | 7.5±0.1 (0.295)        |
|  | P <sub>2</sub> | 2±0.1 (0.079)          |
| Distance of compartment to compartment | P <sub>1</sub> | 8±0.1 (0.472)          |

### 3.5 Quantities Per Reel

| Package Type     | TP   |
|------------------|------|
| Quantities (pcs) | 2000 |

## Photocoupler LTV-808X series

### 4. RATING AND CHARACTERISTICS

#### 4.1 Absolute Maximum Ratings at Ta=25°C

|        | Parameter   | Symbol       | Rating     | Unit      |
|--------|---|--------------|------------|-----------|
| Input  | Forward Current                                       | $I_F$        | 50         | mA        |
|        | Reverse Voltage                                       | $V_R$        | 6          | V         |
|        | Power Dissipation                                     | $P_D$        | 120        | mW        |
|        | Junction Temperature                                  | $T_J$        | 125        | °C        |
| Output | Off-State Output Terminal Voltage                     | $V_{DRM}$    | 800        | V         |
|        | On-State RMS Current                                  | $I_{D(RMS)}$ | 100        | mA        |
|        | Peak Repetitive Surge Current<br>( PW=100μs, 120pps ) | $V_{TSM}$    | 1          | A         |
|        | Output Power Dissipation                              | $P_O$        | 300        | mW        |
|        | Junction Temperature                                  | $T_J$        | 125        | °C        |
|        | Total Power Dissipation                               | $P_{tot}$    | 330        | mW        |
| *1.    | Isolation Voltage                                     | $V_{iso}$    | 5000       | $V_{rms}$ |
|        | Ambient Operating Temperature Range                   | $T_A$        | -55 ~ +110 | °C        |
|        | Storage Temperature                                   | $T_{stg}$    | -55 ~ +150 | °C        |
| *2.    | Soldering Temperature                                 | $T_L$        | 260        | °C        |

\*1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave.

\*2. For 10 Seconds

## Photocoupler LTV-808X series

### 4.2 Recommended Operating Conditions (Note)

| Characteristics       | Symbol    | Min. | Typ. | Max. | Unit |
|-----------------------|-----------|------|------|------|------|
| Supply Voltage        | $V_{AC}$  | -    | -    | 240  | Vac  |
| Forward Current       | LTV-8081  | 22.5 | 25   | 30   | mA   |
|                       | LTV-8082  | 15   | 20   | 30   | mA   |
|                       | LTV-8083  | 7.5  | 10   | 30   | mA   |
| Operating Temperature | $T_{opr}$ | -25  | -    | 85   | °C   |

Note: Recommended operating conditions are given as a design guideline to obtain expected performance of the device.

Additionally, each item is an independent guideline respectively. In developing designs using this product, please confirm specified characteristics shown in this document.

## Photocoupler LTV-808X series

### 4.3 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

| Parameter     |   | Symbol     | Min.     | Typ. | Max. | Unit                   | Test Condition   |                            |
|---------------|---|------------|----------|------|------|------------------------|--|----------------------------|
| Input         | Forward Voltage   | $V_F$      | —        | 1.2  | 1.4  | V                      | $I_F=20\text{mA}$  |                            |
|               | Reverse Current   | $I_R$      | —        | —    | 10   | $\mu\text{A}$          | $V_R=3\text{V}$  |                            |
| Output        | *1 Peak Blocking Current, Either Direction                              | $I_{DRM}$  | —        | —    | 1    | $\mu\text{A}$          | $V_{DRM}=600\text{V}$  |                            |
|               | Peak On-State Voltage, Either Direction                                 | $V_{TM}$   | —        | —    | 3.0  | V                      | $I_{TM}=100\text{ mA Peak}$  |                            |
|               | *2 Critical Rate of Rise of Off-State Voltage                           | $dv/dt$    | 1000     | —    | —    | $\text{V}/\mu\text{s}$ |  |                            |
| COUPLED       | Led Trigger Current, Current Required to Latch Output, Either Direction | LTV-8081   | $I_{FT}$ | —    | —    | 15                     | mA   | Main Terminal Voltage = 3V |
|               |   | LTV-8082   |          | —    | —    | 10                     |  |                            |
|               |   | LTV-8083   |          | —    | —    | 5                      |  |                            |
|               | Holding Current, Either Direction                                       | $I_H$      | —        | 400  | —    | $\mu\text{A}$          |  |                            |
| ZERO CROSSING | Inhibit Voltage   | $V_{INH}$  | —        | 5    | 20   | Volts                  | $I_F=\text{Rated } I_{FT}$ , MT1-MT2 Voltage above which device will not trigger |                            |
|               | Leakage in Inhibited State  | $I_{DRM2}$ | —        | —    | 500  | $\mu\text{A}$          | $I_F = \text{Rated } I_{FT}$ , Rated $V_{DRM}$ , Off State                       |                            |

\*1 Test voltage must be applied within  $dv/dt$  rating.

\*2 This is static  $dv/dt$ . Commutating  $dv/dt$  is a function of the load-driving thyristor(s) only.

# Photocoupler LTV-808X series

## 5. CHARACTERISTICS CURVES (TYPICAL PERFORMANCE)

Fig.1 Forward Current vs. Ambient Temperature

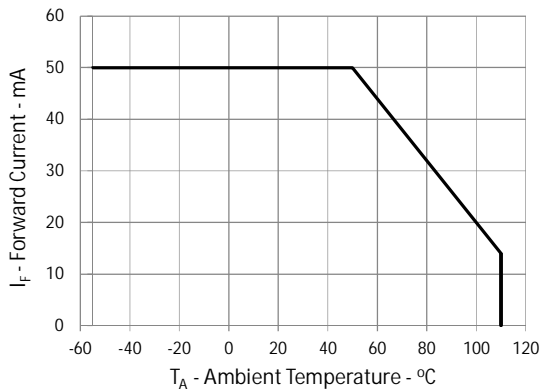


Fig.2 On-state Current vs. Ambient Temperature

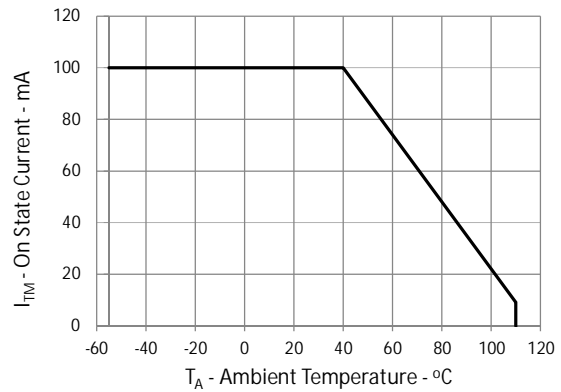


Fig.3 Normalized Trigger Current vs Ambient Temperature

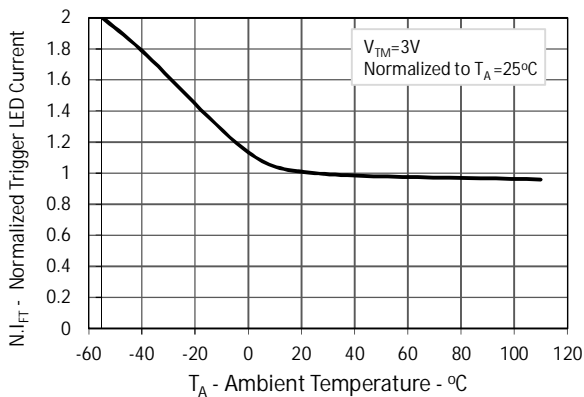


Fig.4 Forward Current vs. Forward Voltage

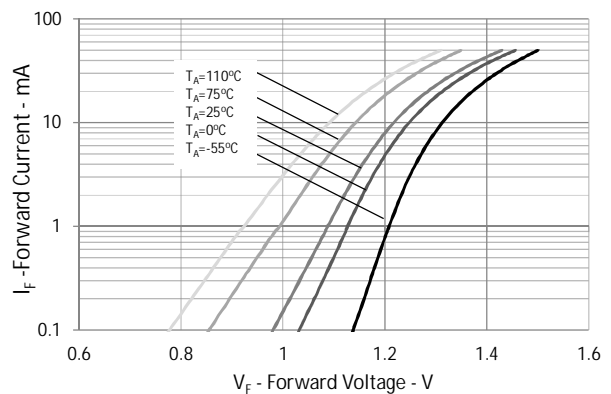


Fig.5 Normalized On-state Voltage vs Ambient Temperature


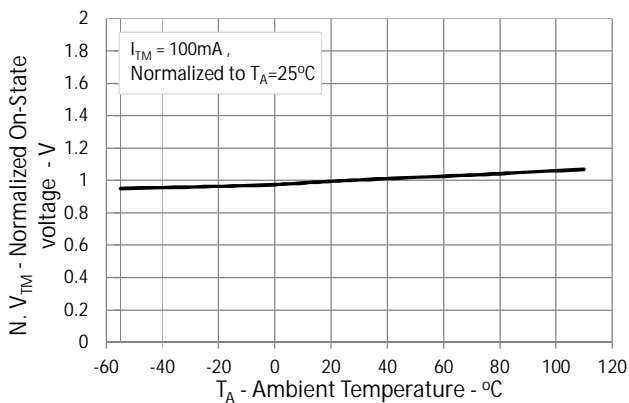


Fig.6 Normalized Holding Current vs Ambient Temperature



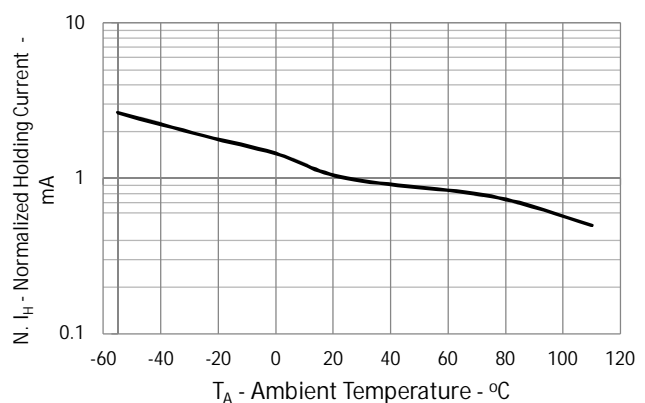

## Photocoupler LTV-808X series

Fig.7 Off-state Current vs Ambient Temperature

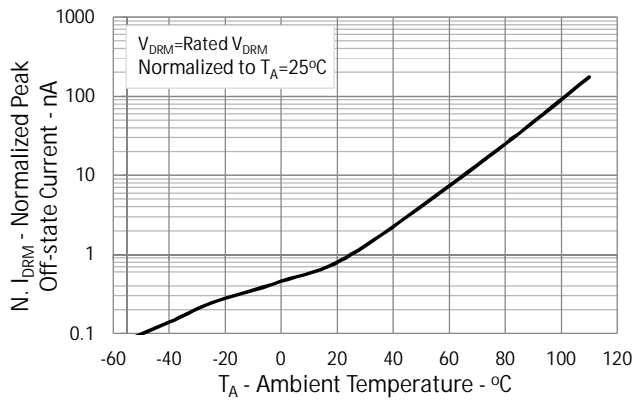


Fig.8 On-state Current vs On-state Voltage

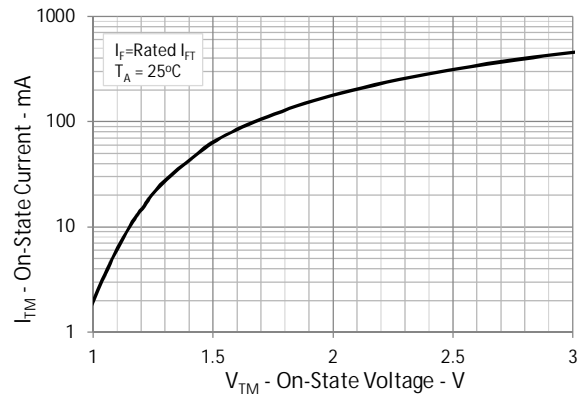


Fig.9 Leakage in Inhibited State vs Ambient Temperature


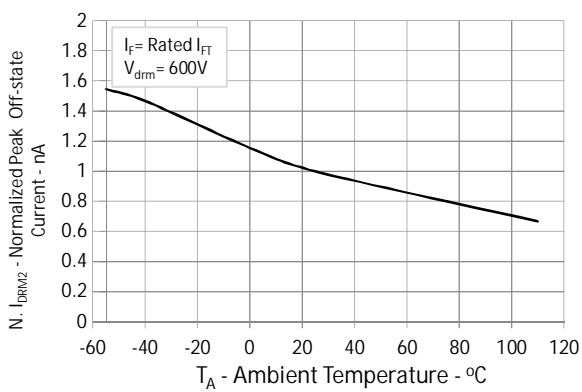


Fig.10 Inhibit Voltage vs Ambient Temperature

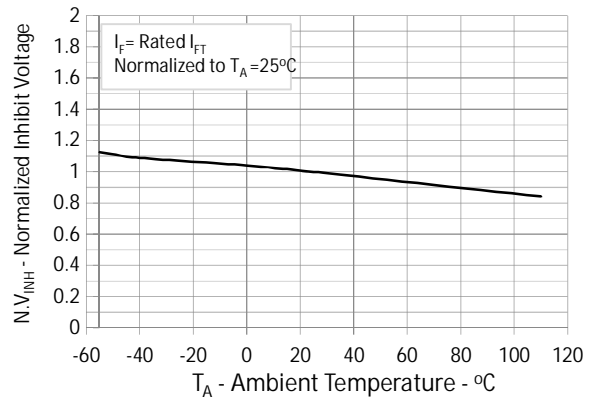


# Photocoupler LTV-808X series

## 6. TEMPERATURE PROFILE OF SOLDERING

### 6.1 IR Reflow soldering (JEDEC-STD-020E compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

| Profile item                     | Conditions     |
|----------------------------------|----------------|
| Preheat                          |                |
| - Temperature Min ( $T_{Smin}$ ) | 150°C          |
| - Temperature Max ( $T_{Smax}$ ) | 200°C          |
| - Time (min to max) (ts)         | 90±30 sec      |
| Soldering zone                   |                |
| - Temperature ( $T_L$ )          | 217°C          |
| - Time ( $t_L$ )                 | 60 sec         |
| Peak Temperature ( $T_P$ )       | 260°C          |
| Ramp-up rate                     | 3°C / sec max. |
| Ramp-down rate                   | 3~6°C / sec    |

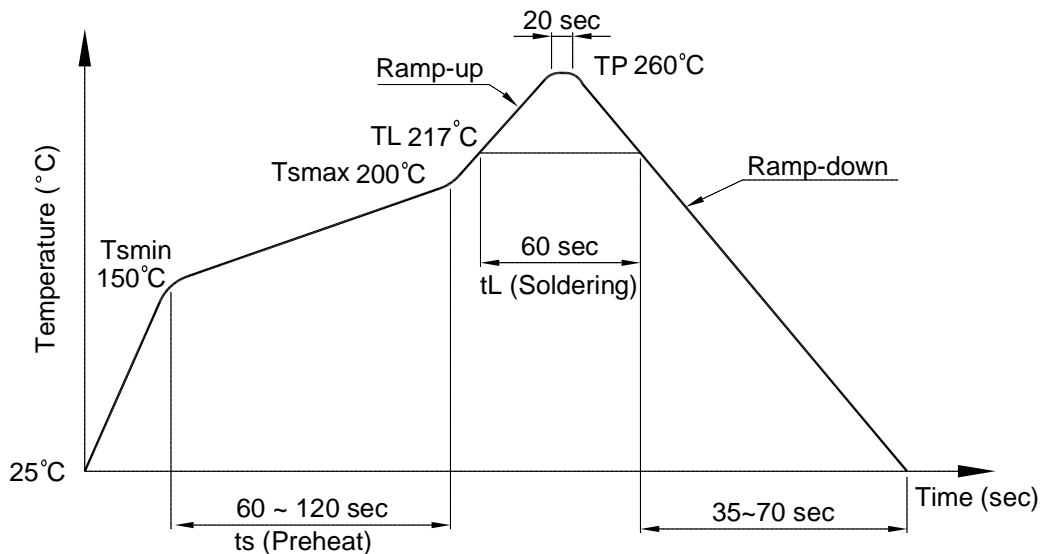

**Photocoupler  
LTV-808X series**

**6.2 Wave soldering (JEDEC22A111 compliant)**


One time soldering is recommended within the condition of temperature.

Temperature:  $260 \pm 0 / -5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to  $140^{\circ}\text{C}$

Preheat time: 30 to 80 sec.

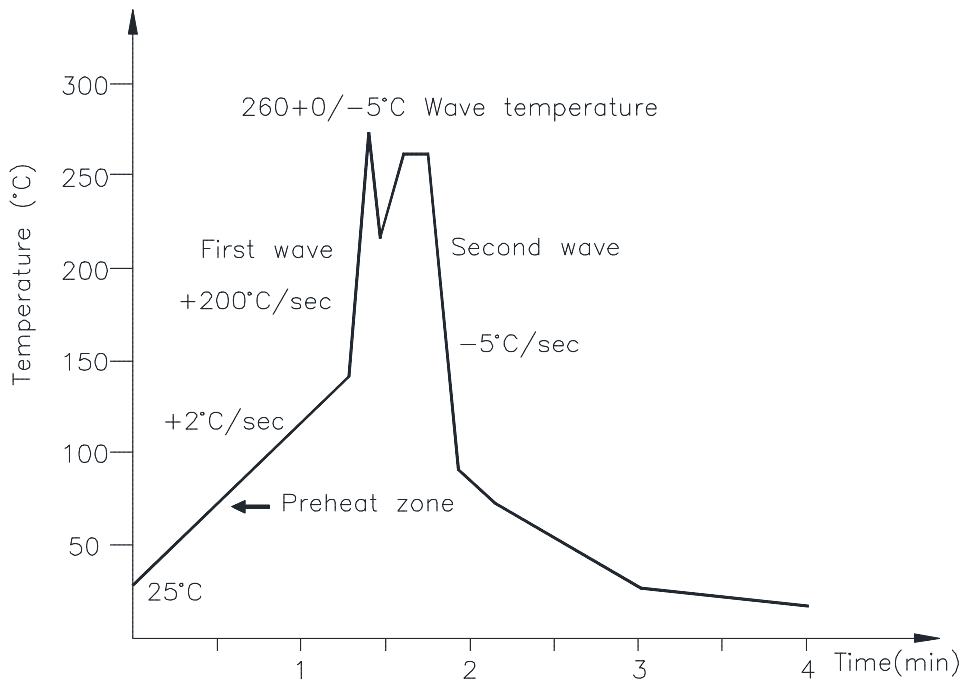

**6.3 Hand soldering by soldering iron**

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature:  $380 \pm 0 / -5^{\circ}\text{C}$

Time: 3 sec max.

**Photocoupler  
LTV-808X series**

**7. RRECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)**


Unit: mm

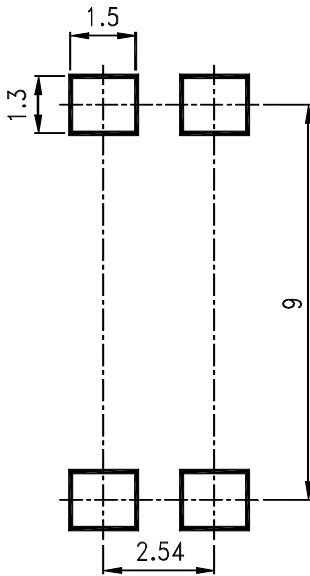


**Photocoupler  
LTV-808X series**

**8. NAMING RULE**

**LTV-808(X)(X)-(X)-G**

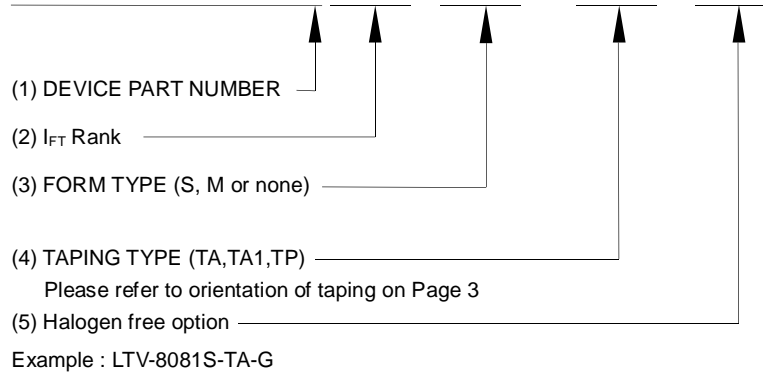

**LTV 808(X)(X)(X)-V-G**

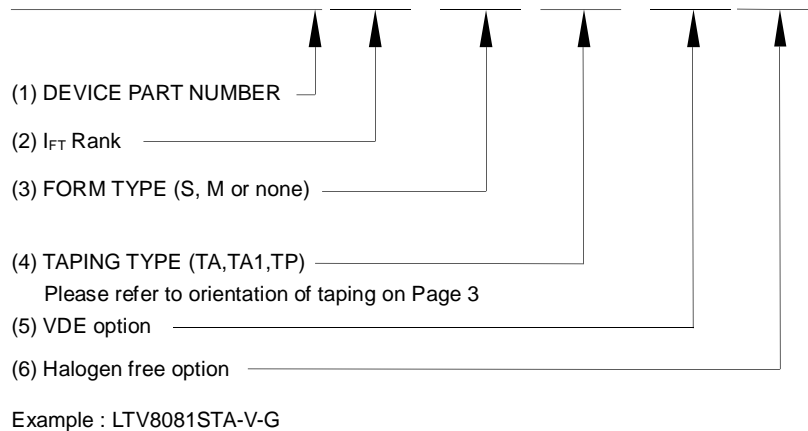

**9. NOTES**

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.