

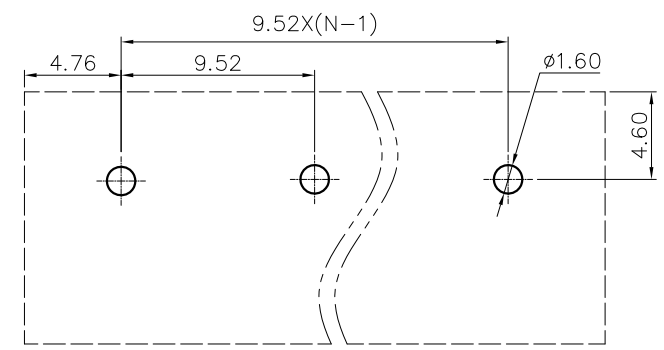
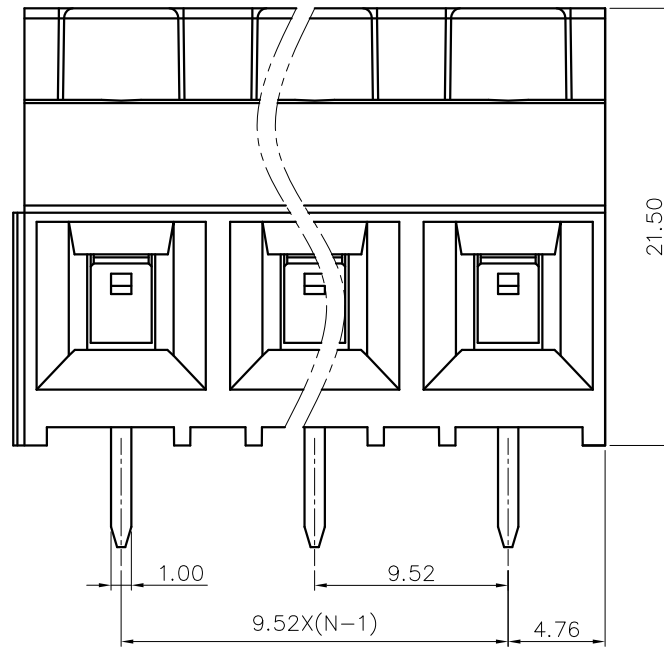
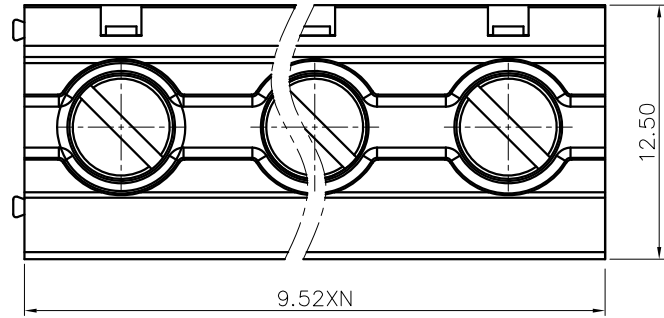


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

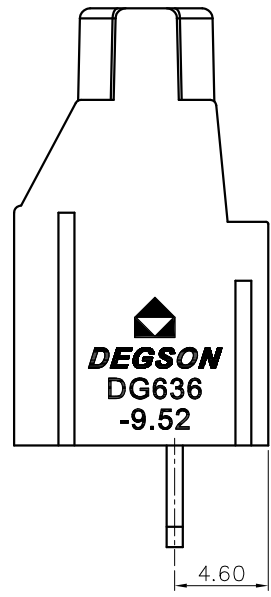

PCB LAYOUT

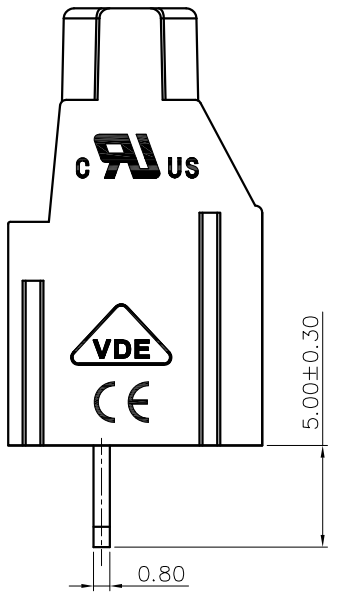

DG636 - 9.52 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (RoHS)
 00A-(Standard)
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

- NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 30A
 2. Torque value : M3 , 4.43Lb.in
 3. Wire range : 10-26AWG
 IEC Standard
 1. Rated voltage/current : 1000V / 32A
 2. Torque value : M3 , 0.5N·m
 3. Wire range : 0.2~4.0mm² / 0.2~6.0mm²

- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 9.52mm, Poles : N=02~24P
 3. Stripping length : 8mm
 4. Withstanding voltage : AC3500V/1Min.
 5. Operating temperature : -40°C~+105°C
 6. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm							0.1/10	Z
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

7. RoHS Compliance

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		DRAWING NO.:		MM (INCH)
		NAME:		SCALE	
		TITLE:		DO NOT SCALE DRAWING	
		REV		DO	
		SHEET		1/1	
		SCALE		1:1	

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DG636-9.52-XXP-1Y-00A(H)

CUSTOMER DRAWING

DO NOT SCALE DRAWING

SCALE 1:1