

# Precision Socket Strip 2,54 mm

Series


006

pitch  
2,54

termination

mating pin size  
□ 0,40-0,56  
□ 0,25x0,45


max. pincount  
064

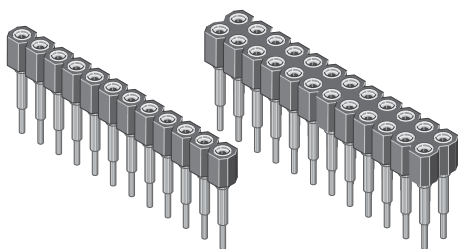


Rated current	3,0 A
Rated voltage	150 VRMS / Vdc
Withstand voltage	1000 VRMS for one minute
Material contact	Copper alloy
Material clip	BeCu
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds

All dimensions in mm.

## Variation



1



2

## Contact type (for details please see page 22-23)

B1	
B2	
B3	
F1	
F2	
F3	
F4	
F5	
F6	
F7	
F9	
G1	
G2	
G3	
G4	
G5	
K1	
K4	
T1	
T2	
T3	

Clip style:  
S = 4 finger clip

Plating:  
T = Sn  
F = Au  
H = Au 0,75 μ

\* No. of contacts:  
Variation 1 = 001 - 064  
Variation 2 = 002 - 064

Variation (1,2)

No. of contacts \*  
(001, ... - 064)

Contact type  
(B1, B2, ...)

Clip style  
Plating contact  
Plating clip (F,H)



www.mpe-connector.de

Order code:

006-2-??-D-??ST?-XS0

Mating series	034	038	035	037	367
see page	2-4	2-6	2-7	2-8	2-9