

This drawing may not be copied, reproduced or made available to third parties without the prior written approval of the company. Any use of the drawing for any other purpose is prohibited.

Technische Daten/ technical data : Akku/ battery
 Chemie/ chemistry : Li-Ion
 Zellenzahl/ no. of cells : 1 Zelle/ cell INR 18650 M26 LG
 Kapazität/ capacity : nom. 2600mAh discharge at 0.2C
 min. 2500mAh discharge at 0.2C
 ta:20°C; EV(Discharge End Voltage): 2.75V per cell

Innenwiderstand/ impedance : < 100mOhm (battery and safetyboard)
 Nominalspannung/ nominal voltage : 3.6V
 Standard Ladespannung/ standard charge voltage : 4.2V±1%
 Standard Entladespannung/ standard discharge voltage : 2.75V per cell
 Nominaler Ladestrom/ nominal charge current : 0.5C
 Maximaler Ladestrom/ maximum charge current : 2500mA (limited by safetyboard)
 Ladeendstrom/ charge end current : 0.01C recommended
 Maximaler Entladestrom/ maximum discharge current : 2500mA (limited by safetyboard)
 Anwendungsbereich/ ambient temperature range : 0°C...+45°C charge
 -20°C...+60°C discharge
 -20°C...+20°C storage max. 1 year
 -20°C...+45°C storage max. 3months

Selbstentladung/ self discharge : ≤ 5% / month at20°C
 ≤ 10% / month at30°C
 ≤ 20% / month at40°C

Standards/ : UN 3480, Subsection 38.3
 All cells and battery packs type tested according to UN manual of test and criteria subsection 38.3

Technische Daten/ technical data : Sicherheitsschaltung/ safety board

Überladeschutzspannung/ over charge voltage detection : 4.325V±50mV

Wiedereinschaltspannung/ over charge release voltage : 4.075V±50mV

Entladeabschaltspannung/ over discharge detection voltage : 2.5V±100mV

Wiedereinschaltspannung/ over discharge release voltage : 2.9V±100mV

Nominaler Lade/Entladestrom/ nominal operating current : 2.5A

Entlade Abschaltstrom/ discharge cut off current : 5A±1A

Kurzschlusschutz/ short circuit protection : gegen äußeren Kurzschluss/ against external short circuit

Temperaturschalter/ temperature switch : PTC: SMD1812R400SF; 6V/4A at 25°C ; 3.41A at 40°C


MOSFET : in Masse
 in Gnd

Rückstellkriterium/ release condition : Last trennen, Aktiv nach Aufladen/
 cut load, release after charging up

Nettogewicht/ net weight : 47.5g

Leiterplattenmaterial/ pcb material : FR4

Standards : CE

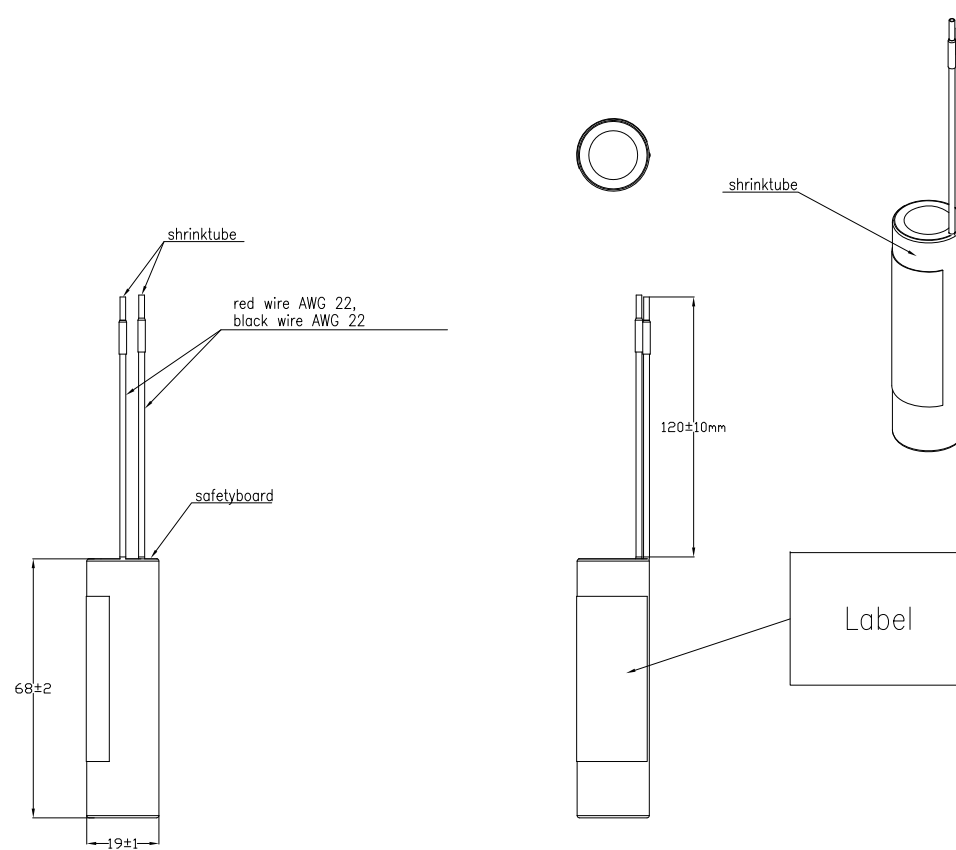

Part Number	SAP Description
2347-3008-06	Li-Ion-3.6V-2600mAh-1S1P-PTC-M26
2347-3008-206	Li-Ion-3.6V-2600mAh-1S1P-M26/UK

Verwendungsbereich/Application range für Anfrage/for inquiry AN-IS-2013-00421		Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale (DIN A2): 1:1	Gewicht/Weight
Allgemeintoleranz DIN ISO 2768-m		2019	Datum/Date	Name	
Erstellt/ Drawn by		24.01.	MSt	Zeichnungsname/Drawing name	
		Li-Ion Battery 3.6V 2600mAh with safetyboard			
V2	PTC information added corrected over charge release voltage	12.08.19	JX	Zeichnungsnummer/Drawing number	
V1	part number overview added	15.04.19	DS	2347-3008-XXX	
V0	---	XX.XX.XX	XX	Blatt/ Sheet	
Version Änderung/Change		Datum/Date	Name	Ursprung/Origin Proj. IS-2013-00421	Ersatz für/Replaced by
				Ersatz durch/Replacement through	

