

■ Features

- 3"x2" Compact Size
- 120W convection, 150W peak (10sec.)
- EMI for both Class I & Class II configuration
- -30~+85°C wide range operating temperature
- No load power consumption<0.3W
- High efficiency up to 94%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Operating altitude up to 5000 meters (Note.5)
- 3 years warranty


■ Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus

■ Description

EPP-120S is a 120W highly reliable green PCB type power supply with a high power density on the 3" by 2" footprint. It accepts 80~264VAC input and offers various output voltages between 12V and 48V. The working efficiency is up to 94% and the extremely low no load power consumption is down below 0.3W. EPP-120S is able to be used for both Class I (with FG) and Class II (no FG) system design. EPP-120S has the complete protection functions; it is complied with the international safety regulations such as TUV BS EN/EN62368-1, BS EN/EN60335-1, UL62368-1 and IEC62368-1. EPP-120S series serves as a high price-to-performance power supply solution for various industrial applications.

■ Model Encoding

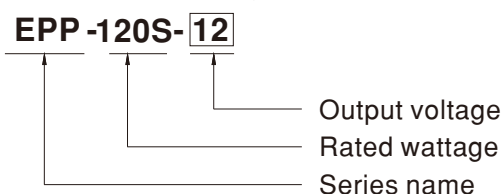





SPECIFICATION

| MODEL | EPP-120S-12 | | EPP-120S-15 | | EPP-120S-24 | | EPP-120S-27 | | EPP-120S-48 | | | |
|---------------------------|------------------------------|--|---|---|--|--|--|--|--------------|--|--------------|--|
| OUTPUT | DC VOLTAGE | | 12V | | 15V | | 24V | | 27V | | 48V | |
| | CURRENT | Peak(10 sec.) | 11.8A | | 9.5A | | 6.25A | | 5.55A | | 3.125A | |
| | | Convection | 9.5A | | 7.6A | | 5A | | 4.44A | | 2.5A | |
| | RATED POWER | Peak(10 sec.) | 141.6W | | 142.5W | | 150W | | 149.8W | | 150W | |
| | | Convection | 114W | | 114W | | 120W | | 119.9W | | 120W | |
| | RIPPLE & NOISE (max.) Note.2 | | 100mVp-p | | 120mVp-p | | 150mVp-p | | 150mVp-p | | 200mVp-p | |
| | VOLTAGE ADJ. RANGE | | 11.4~12.6V | | 14.3~15.8V | | 22.8~25.2V | | 25.6 ~ 28.4V | | 45.6 ~50.4V | |
| | VOLTAGE TOLERANCE Note.3 | | ±2.0% | | ±2% | | ±1.0% | | ±1.0% | | ±1.0% | |
| | LINE REGULATION | | ±0.5% | | ±0.5% | | ±0.5% | | ±0.5% | | ±0.5% | |
| | LOAD REGULATION | | ±1.0% | | ±1.0% | | ±1.0% | | ±1.0% | | ±1.0% | |
| SETUP, RISE TIME | | 600ms, 30ms/230VAC | | 600ms, 30ms/115VAC at full load | | | | | | | | |
| HOLD UP TIME (Typ.) | | 15ms/230VAC | | 15ms/115VAC at full load | | | | | | | | |
| INPUT | VOLTAGE RANGE Note.4 | | 80 ~ 264VAC | | 113 ~ 370VDC | | | | | | | |
| | FREQUENCY RANGE | | 47 ~ 63Hz | | | | | | | | | |
| | POWER FACTOR | | PF>0.94/230VAC | | PF>0.98/115VAC at full load | | | | | | | |
| | EFFICIENCY (Typ.) | | 91% | | 92% | | 93% | | 94% | | 93.5% | |
| | AC CURRENT (Typ.) | | 2.3A/115VAC | | 1.1A/230VAC | | | | | | | |
| | INRUSH CURRENT (Typ.) | | COLD START 30A/115VAC | | 60A/230VAC | | | | | | | |
| | LEAKAGE CURRENT | | <0.75mA / 240VAC | | | | | | | | | |
| PROTECTION | OVERLOAD | | 130~160% rated output power | | Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | | | |
| | OVER VOLTAGE | | 13.2 ~ 15.6V | | 16.5 ~ 19.5V | | 26.4 ~ 31.2V | | 29.7 ~ 35V | | 52.8 ~ 62.4V | |
| | OVER TEMPERATURE | | Protection type : Shut down o/p voltage, recovers automatically after temperature goes down | | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | | -30 ~ +85°C (Refer to "Derating Curve") | | | | | | | | | |
| | WORKING HUMIDITY | | 20 ~ 90% RH non-condensing | | | | | | | | | |
| | STORAGE TEMP. | | -40 ~ +85°C | | | | | | | | | |
| | TEMP. COEFFICIENT | | ±0.03%/°C (0 ~ 50°C) | | | | | | | | | |
| | VIBRATION | | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes | | | | | | | | | |
| | OPERATING ALTITUDE (Note.5) | | 5000 meters | | | | | | | | | |
| SAFETY & EMC (Note 6) | SAFETY STANDARDS | | UL62368-1, TUV BS EN/EN62368-1, BS EN/EN60335-1, IEC62368-1, EAC TP TC 004 approved | | | | | | | | | |
| | WITHSTAND VOLTAGE | | I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC | | | | | | | | | |
| | ISOLATION RESISTANCE | | I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | | |
| | EMC EMISSION | | Parameter | | Standard | | Test Level / Note | | | | | |
| | | | Conducted emission | | BS EN/EN55032 (CISPR32) | | Class B | | | | | |
| | | | Radiated emission | | BS EN/EN55032 (CISPR32) | | Class I : Class B , Class II : Class A | | | | | |
| | | | Harmonic current | | BS EN/EN61000-3-2 | | Class A | | | | | |
| | | | Voltage flicker | | BS EN/EN61000-3-3 | | ----- | | | | | |
| | EMC IMMUNITY | | BS EN/EN61000-6-2 | | | | | | | | | |
| | | | Parameter | | Standard | | Test Level / Note | | | | | |
| | | | ESD | | BS EN/EN61000-4-2 | | Level 3, 8KV air ; Level 3, 4KV contact | | | | | |
| | | | RF field susceptibility | | BS EN/EN61000-4-3 | | Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz) | | | | | |
| | | | EFT bursts | | BS EN/EN61000-4-4 | | Level 3, 2KV | | | | | |
| Surge susceptibility | | | BS EN/EN61000-4-5 | | Level 4, 4KV/Line-FG; 2KV/Line-Line | | | | | | | |
| Conducted susceptibility | | | BS EN/EN61000-4-6 | | Level 3, 10V | | | | | | | |
| Magnetic field immunity | | | BS EN/EN61000-4-8 | | Level 4, 30A/m | | | | | | | |
| Voltage dip, interruption | | BS EN/EN61000-4-11 | | 95% dip 0.5 periods, 30% dip 25 periods, 95% interruptions 250 periods | | | | | | | | |
| OTHERS | MTBF | | 470Khrs min. MIL-HDBK-217F (25°C) | | | | | | | | | |
| | DIMENSION | | 76.2*50.8*28mm (L*W*H) or 3" * 2" * 1.1" inch | | | | | | | | | |
| | PACKING | | 0.13Kg; 100pcs/14Kg/1.13CUFT | | | | | | | | | |
| NOTE | | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</p> <p>5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p> | | | | | | | | | | |


■ Block Diagram

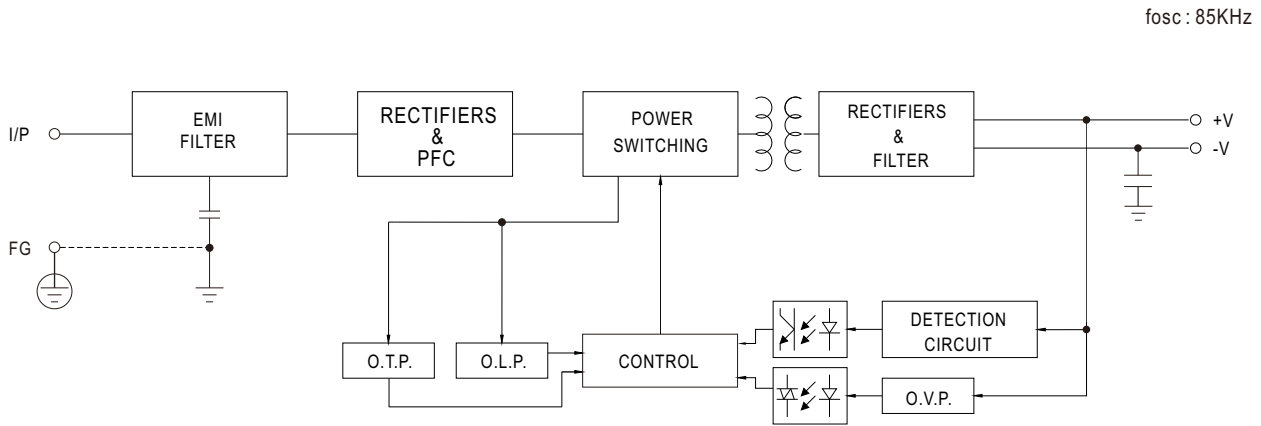

■ Derating Curve

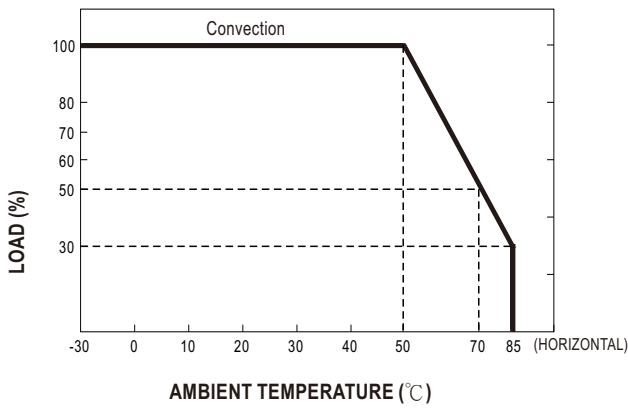


■ Output Derating VS Input Voltage

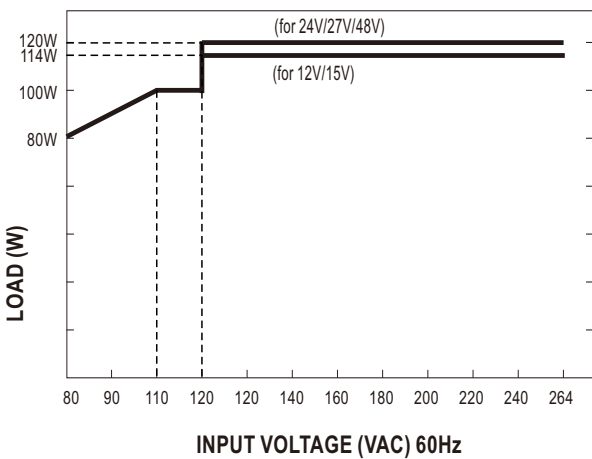

■ Mechanical Specification

Unit:mm

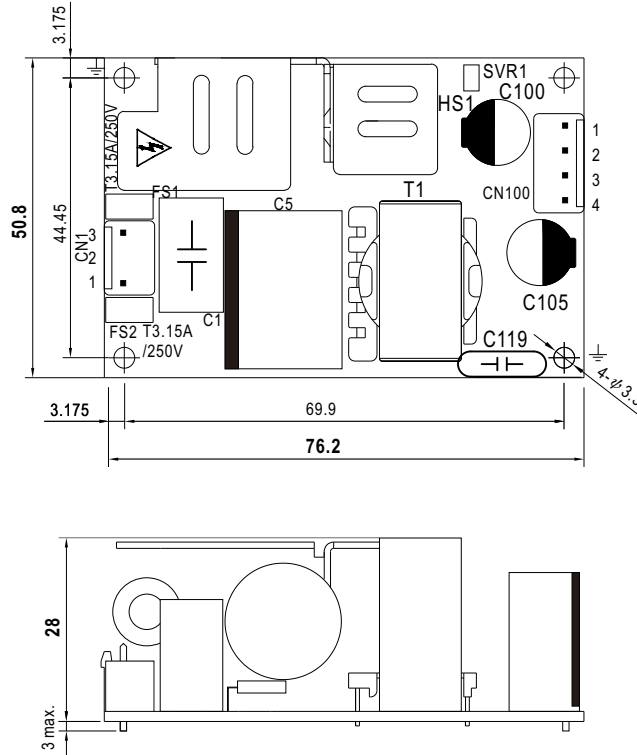

AC Input Connector (CN1) : JST B3P-VH or equivalent

| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|-----------------------|--------------------------------|
| 1 | AC/L | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2 | No Pin | | |
| 3 | AC/N | | |

DC Output Connector (CN2) : JST B4P-VH or equivalent

| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|-----------------------|--------------------------------|
| 1,2 | +V | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 3,4 | -V | | |

⚠ 1.HS1 must have safety isolation distance with system case.

※Note :

- 1.EPP-120S model delivers EMI Class B for both conducted emission and radiated emission for the power supply, when configured into Class I (with FG) system.
- 2.EPP-120S model delivers EMI Class B conducted emission and Class A radiated emission with King Core K5B RC (12*15*7) in output cable for the power supply when configured into Class II (no FG) system.

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>