

Product		Original Date	13/11/2020
Specification	AEC Electronics Company Limited.	PN:	ACLTCV10.7BW590



AEC Electronics Company Limited
PRODUCT SPECIFICATION

Ceramic Filter

AEC PART NUMBER / SPEC. NO: ACLTCV10.7BW590

CUSTOMER: _____



This model is ROHS compliance according to the ROHS directive 2002/95/EC

Customer's Name	
Production Name	Ceramic Filter
Frequency	10.7MHz
Model No	ACLTCV10.7BW590
Issue Date	21st March, 2023

Address: Room 602-603, Java Commercial Centre,
128 Java Road,
North Point, Hong Kong
Homepage: <http://www.aeccrystal.com/>
Email: sales@aeccrystal.com
Telephone: (852)-2856 0000
Fax (852) 2561 2161

Prepared	Inspection	Approved
<i>Nathan</i>	<i>Andy</i>	<i>Henkie</i>

Product	AEC Electronics Company Limited.	Original Date	13/11/2020
Specification		PN:	ACLTCV10.7BW590

1. SCOPE

This specification shall cover the characteristics of the ceramic filter with the type ACLTCV10.7BW590.

2. PART NO.

PART NUMBER	
ACLTCV10.7BW590	
CUSTOMER PART NO	SPECIFICATION NO


3. OUTLINE DIMENSIONS AND MARK

3.1 Appearance: No visible damage and dirt.

3.2 Construction: SMD ceramic packaging.


3.3 The products conform to the RoHS directive and national environment protection law.

3.4 Dimensions and mark

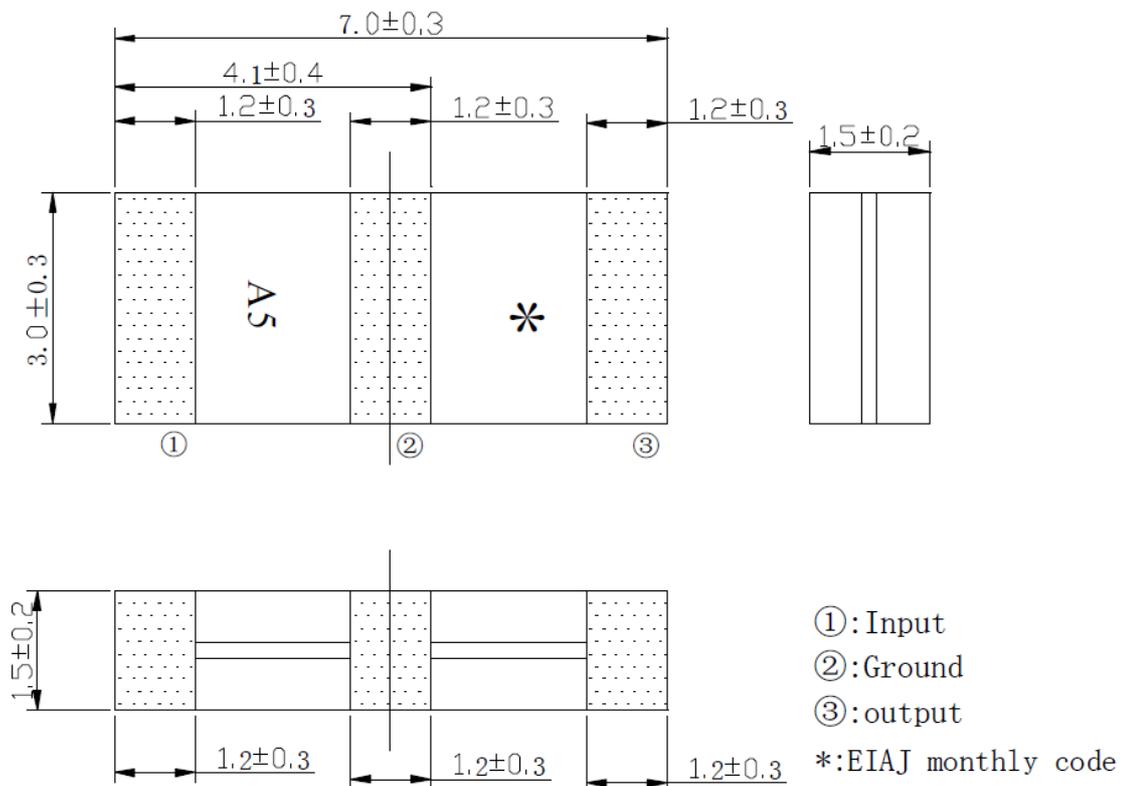

Product	Original Date	13/11/2020
---------	---------------	------------

3.5 Structure

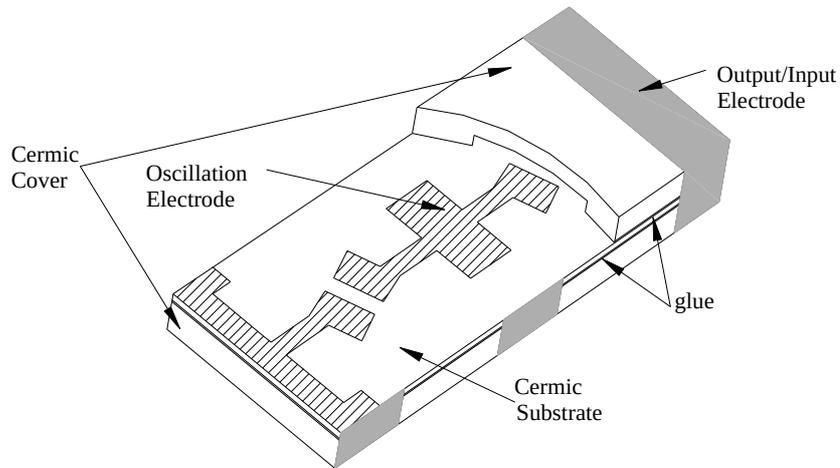

4 ELECTRICAL SPECIFICATIONS

4.1 RATING

Items	Content
Withstanding Voltage (V)	50 (DC, 1min)
Insulation Resistance Ri, (MΩ) min.	100 (10V, 1min)
Operating Temperature Range (°C)	-20 ~ +80
Storage Temperature Range (°C)	-40 ~ +85

4.2 ELECTRICAL SPECIFICATIONS

Items	Content
Center Frequency(f_0)(MHz)	10.700±0.030
3dB Bandwidth(kHz)	280±50
20dB Bandwidth(kHz) max	590
Insertion Loss (dB)	3.0±2.0 (at minimum loss point)
Ripple (dB) max	1.0 (within 3dB Bandwidth)
Spurious Attenuation (dB) min	35 (9MHz-12MHz)
Input/Output Impedance(Ω)	330
Temp. Characteristic	±0.5% (-20°C to 80°C)


Product		Original Date	13/11/2020
Specification	AEC Electronics Company Limited.	PN:	ACLTCV10.7BW590

5. TEST

5.1 Test Conditions

Parts shall be tested under the condition (Temp.: $20 \pm 15^\circ\text{C}$, Humidity : $65 \pm 20\%$ R.H.) unless the standard condition (Temp.: $25 \pm 2^\circ\text{C}$, Humidity : $65 \pm 5\%$ R.H.) is regulated to measure.

5.2 Test Circuit

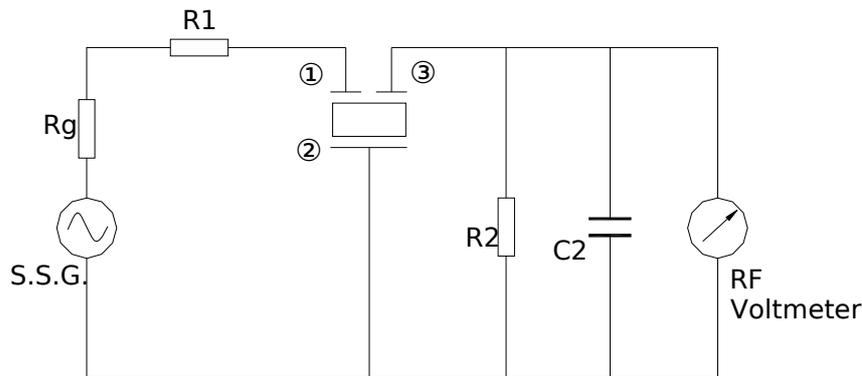

$R1=280\Omega \pm 5\%$, $R2=330\Omega \pm 5\%$, $Rg=50\Omega$:Input

$C2=10$ Pf (Including stray capacitance and capacitance of RF Voltmeter) :Ground
:Output

S.S.G:Output Voltmeter

6. ENVIRONMENTAL TEST

No.	Item	Condition of Test	Requirement
6.1	Humidity	Subject the filter at $40 \pm 2^\circ\text{C}$ and 90%-95% R.H. for 96h, Filter shall be measured after being placed in natural conditions for 1h.	It shall fulfill Table 1.
6.2	High Temperature Exposure	Subject the filter to $85 \pm 2^\circ\text{C}$ for 96h, Filter shall be measured after being placed in natural conditions for 1h.	It shall fulfill Table 1.
6.3	Low Temperature Exposure	Subject the filter to $-40 \pm 2^\circ\text{C}$ for 96h, Filter shall be measured after being placed in natural conditions for 1h.	It shall fulfill Table 1.

Product Specification	AEC Electronics Company Limited.	Original Date	13/11/2020
		PN:	ACLTCV10.7BW590

6.4	Temperature Cycling	After temperature cycling of blow table was performed 5 times, Filter shall be measured after being placed in natural conditions for 1h.		It shall fulfill Table 1.
		Temperature	Time	
		-20 ±3 °C	30 ±3 min	
		80 ±3 °C	30 ±3 min	
6.5	Vibration	Subject the filter to vibration for 2h. Each in x y and z axis with the amplitude of 1.5mm, The frequency shall be varied uniformly between the limits of 10Hz-55Hz-10Hz and then filter shall be measured.		It shall fulfill Table 1.
6.6	Mechanical Shock	Filter shall be measured after 3 times random dropping from the height of 1m on wooden plate.		No visible damage and it shall fulfill Table 1.
6.7	Soldering Test	Passed through the re-flow oven under the following condition and left at room temperature for 24h before measurement. 		It shall fulfill Table 1.
6.8	Solderability	Terminals of filter shall be immersed in soldering bath(235°C ±5 °C) for 3s ±0.5 s.		More than 95% of the terminal surface of the filter shall be covered with fresh solder.

Product Specification	AEC Electronics Company Limited.	Original Date	13/11/2020
		PN:	ACLTCV10.7BW590

6.9	Board Bend	<p>Mount on a glass-epoxy board (width =50mm, thickness=1.6mm), then bend it to 1mm displacement (velocity= 1mm/s) and keep it for 5s</p>	<p>ical such (shall ir</p>
------------	-------------------	---	---

(to be continued)


Table 1

Item	Characteristics after test
Center Frequency Drift (kHz) max	±30
Insertion Loss Drift (dB) max	±2±
3dB Bandwidth Drift (kHz) max	±25
20dB Bandwidth Drift (kHz) max	±60

Note: The limits in the above table are referenced to the initial measurements.


7 RECOMMENDED LAND PATTERN AND REFLOW SOLDERING STANDARD CONDITIONS

Recommended land pattern

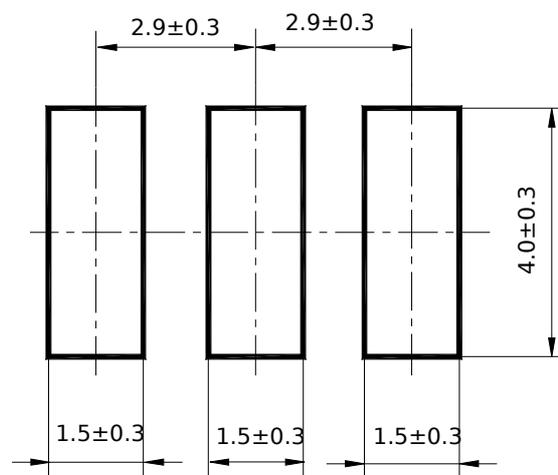

Product		Original Date	13/11/2020
Specification	AEC Electronics Company Limited.	PN:	ACLTCV10.7BW590

7.2 Recommended reflow soldering standard condition

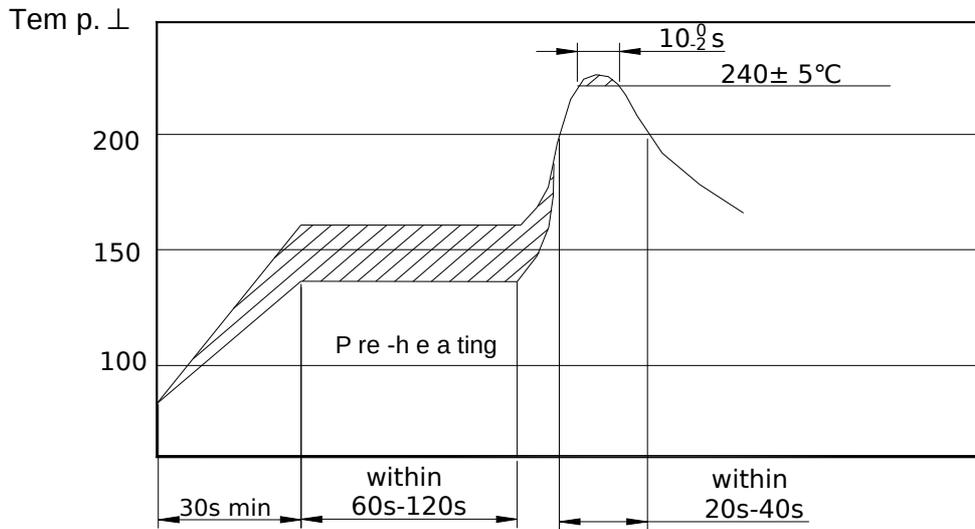


8. PACKAGE

To protect the products in storage and transportation, it is necessary to pack them (outer and inner package)

8.1 On paper pack, the following requirements are requested.

8.1.1 Dimensions and Mark

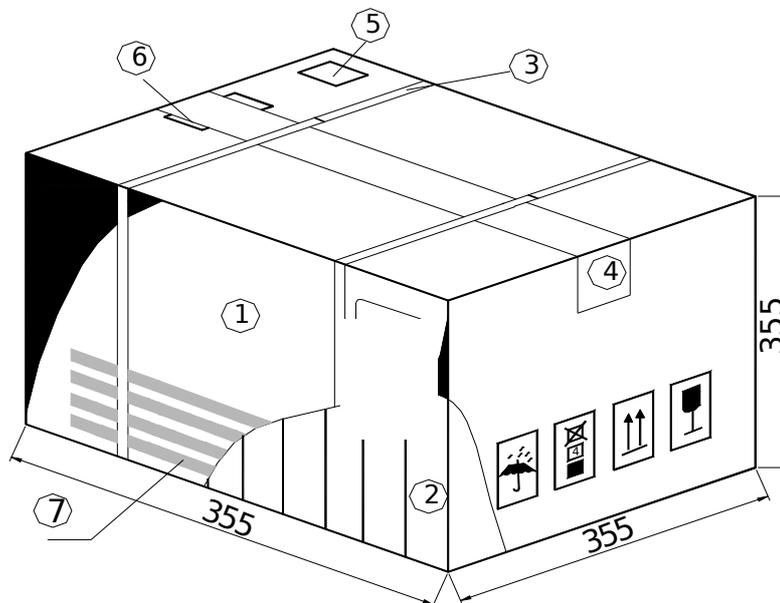

NO.	Name	Quantity
	Package	1
	Inner Box	12

Product		Original Date	13/11/2020
Specification	AEC Electronics Company Limited.	PN:	ACLTCV10.7BW590

	Belt	2.9 m
	Adhesive tape	1.2 m
	Label	1
	Certificate of approval	1
	Company name ,Address etc.	

8.1.2 Section of package

Package is made of corrugated paper with thickness of 0.8cm. Package has 10 inner boxes, each box has 1 reels (each reel for plastic bag).

8.1.3 Quantity of package


Per plastic reel 4000 pieces of piezoelectric ceramic part

Per inner box 1 reel

Per package 10 inner boxes

(40000 pieces of piezoelectric ceramic part)

8.1.4 Inner Box Dimensions

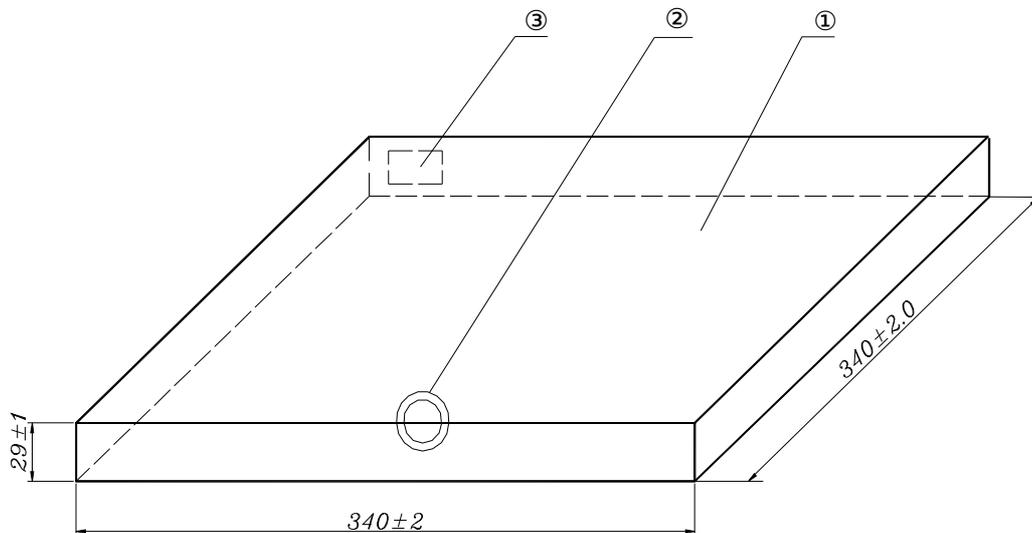


NO.	Name	Quantity
	Inner Box	1
	QC Label	1
	Label	1

8.2 On reel pack, the following requirements are requested.


8.2.1 Reel

Product	AEC Electronics Company Limited.	Original Date	13/11/2020
Specification		PN:	ACLTCV10.7BW590

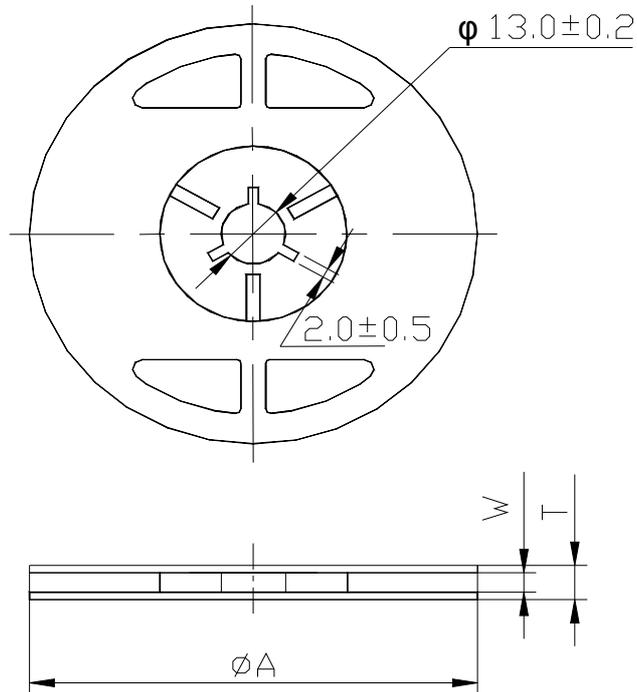


$\phi\phi A$	W	T	Pieces per reel	Carrier tape size
330±3	16.4min	22.4max	4000typ.	16

8.2.3 Packing Method Sketch Map

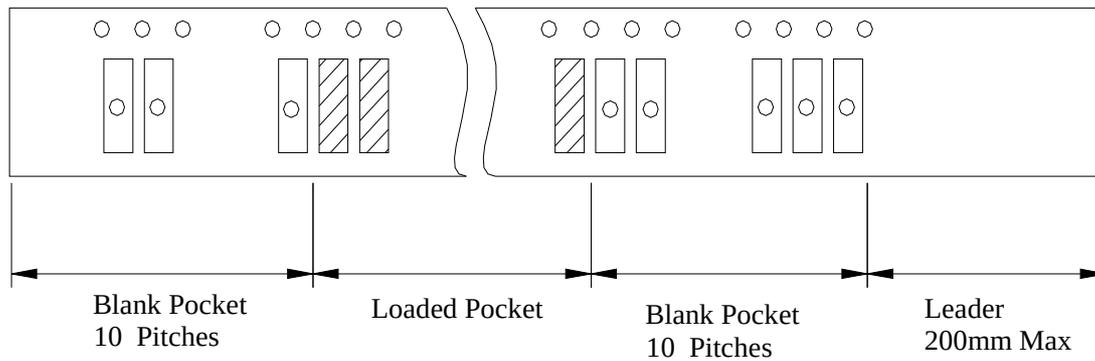

8.2.4 Test Condition Of Peeling Strength

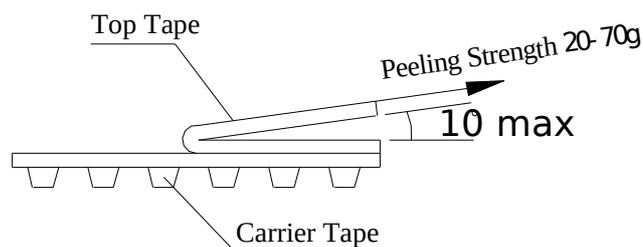

Product		Original Date	13/11/2020
Specification	AEC Electronics Company Limited.	PN:	ACLTCV10.7BW590

9. EIAJ Monthly Code

2019 / 2021 / 2023		2020 / 2022 / 2024	
MONTH	CODE	MONTH	CODE
JAN	A	JAN	N
FEB	B	FEB	P
MAR	C	MAR	Q
APR	D	APR	R
MAY	E	MAY	S
JUN	F	JUN	T
JUL	G	JUL	U
AUG	H	AUG	V
SEP	J	SEP	W
OCT	K	OCT	X
NOV	L	NOV	Y
DEC	M	DEC	Z

10. OTHER

10.1 Caution

10.1.1 Don't apply excess mechanical stress to the component and terminals at soldering. Do not use this product with bend.

10.1.2 Do not clean or wash the component for it is not hermetically sealed.

10.1.3 Do not use strong acidity flux, more than 0.2wt% chlorine content, in flow soldering.

10.1.4 Don't be close to fire.

10.1.5 All kinds of re-flow soldering must not be applied on the component.

10.1.6 This specification mentions the quality of the component as a single unit. Please insure the component is thoroughly evaluated in your application circuit

10.1.7 Expire date (Shelf life) of the products is six months after delivery under the conditions of a sealed and an unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in the solderability or rusty. Please confirm solderability and characteristics for the products regularly.

10.1.8 Please contact us before using the product as automobile electronic component.

10.2 Notice

10.2.1 Please return one of this specification after your signature of acceptance.

10.2.2 When something gets doubtful with this specifications, we shall jointly work to get an agreement.