

Constant Voltage LED Power Supply

SLT96-24VLE-UN

SLT96-48VLE-UN



Product description:

This type of power supply is an exclusively designed stabilized power supply for LED lamp. With constant voltage (CV) technology, it is suitable for constant voltage lamps (24V/48V) connected in parallels. As an advantage of constant voltage (CV) technology, a switch can be installed between secondary side and lamps.

The built-in protection circuit will shut down the power supply in case of such faults as: open circuit, short circuit, over load. The power supply will restart automatically after fault correction.



Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493
UL8750
UL1310
FCC15 classA


Characteristics:

- Independent power supply for constant voltage LED lamp
- Standard 8-socket with loop-in and out
- Class II protection against electric shock from direct and indirect contact
- Ultraslim design only 22mm on height
- Start-up time $\leq 0.5s$
- Class2 output for UL application
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after removal of fault conditions
- Class I and II lamp application
- ECO design, comply with ERP directives
- Warranty : 5 Years


Specifications:

Model		SLT96-24VLE-UN	SLT96-48VLE-UN
Output	turn on time(S)	<0.5	<0.5
	output power(W)	0--96W	0-96W
	output voltage(V)	24	48
	output voltage tolerance ¹	±3%	±3%
	ripple voltage(mV)	200(Vp-P)	400(Vp-p)
	working current range(A)	0-4.0	0-2.0
	dimming interface	No	No
	dimming range	n/a	n/a
Input	rated supply voltage(Vac)	120-240	120-240
	voltage range(Vac)	108-264	108-264
	line frequency(Hz)	50/60	50/60
	input current(A)	0.90A@230V	0.90A@230V
	efficiency ²	≥92%	≥91%
	average efficiency ³	≥91%	≥90%
	no load power consumption(W)	≤0.5	≤0.5
	power factor ²	0.95	0.95
Protection	inrush current(lpk)	Pending	Pending
	short circuit protection	YES	YES
	over temperature protection	YES	YES
	over load protection	YES	YES
	automatic restart	Yes, after fault remove will restart automatically	Yes, after fault remove will restart automatically
Ambient and Life	surge capacity	L-N:1KV	L-N:1KV
	Ta(C)	-20-35@120V/-20-50@230V	-20-35@120V/-20-50@230V
	Tc max.(C)	90	90
	Storage Temperature(C)	-30...80	-30...80
	ambient humidity range	5%...85%, Not condensing	5%...85%, Not condensing
	nominal life-time(hrs)	50000@Tc=90 C	50000@Tc=90 C
Other	weight(g)	Pending	Pending
	dimensions (L×W×H)(mm)	180x60x22	180x60x22
	casing material	Plastic	Plastic
	housing colour	Grey	Grey
	type of protection	IP20	IP20
	protection class	ClassI/Class2 output	ClassI/Class2 output
Note	<p>1. Tolerance:includes set up tolerance, line regulation and load regulation. 2. Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3. Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic average of these four values. 4. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p>		

Dimensions(mm):

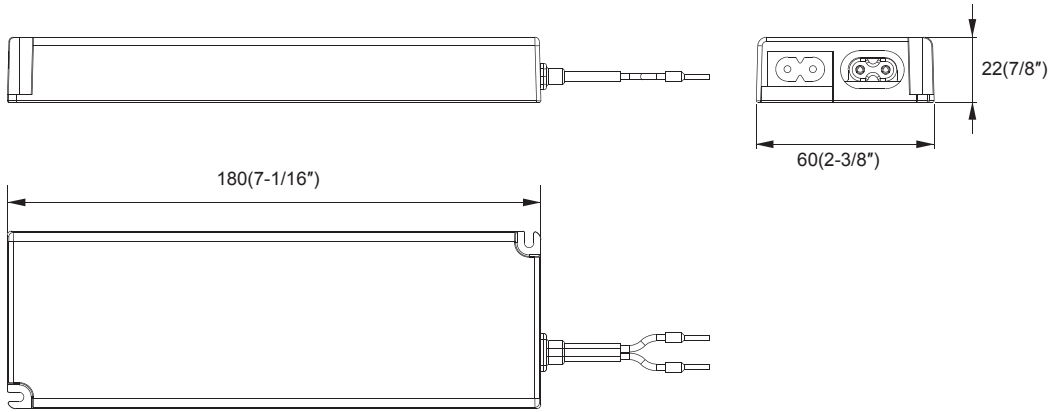

Wiring Diagram

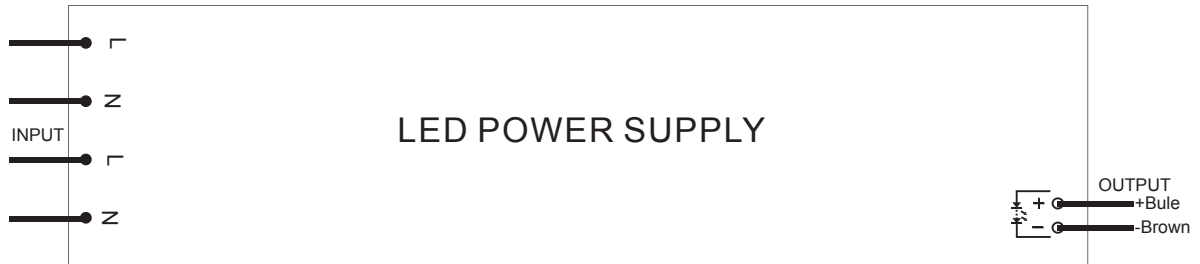

Sales & Technical Support:

SELF Electronics Co.,Ltd.(Headquarters)

Add: No. 1345 JuXian Road, Ningbo Hi Tech Park, Ningbo, China 315103
Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)
+86-574-2880-5678 (for Chinese assistance)
Fax: +86-574-28805656
E-mail: sales@self-electronics.com
<http://www.self-electronics.com>

SELF Electronics Co.,Ltd.,Shenzhen Office

Add: Room2007, Xinglang Xuan, Xinghemingju, Fuming Rd.,
Futian District, Shenzhen
Tel: +86-755-8355-8850
Fax: +86-755-8355-8840
E-mail: szsales@self-electronics.com

SELF Electronics Germany GmbH

August-Horch-Str. 7, 51149 Cologne
Phone: +492203-18501-0
Fax: 492203-18501-199
E-mail: saleseu@self-electronics.com