


# GP Batteries

**Data Sheet**


**Model No.: GP362**

Description : Silver Oxide Low Drain Button Cell  
 Nominal Voltage : 1.55 Volts  
 Nominal Dimensions :  $\varnothing 7.90 \times 2.10$ mm  
 Application : Analog watch  
 Average Weight : 0.45g  
 Shelf Life : Not less than 90% of the service capacity, following 1st year storage at 20°C.  
 Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.  
 Nominal Service Life : 770 hrs (at 50k $\Omega$  Load)  
 (to 1.2V at 20°C) 320 days (at 500k $\Omega$  Load)

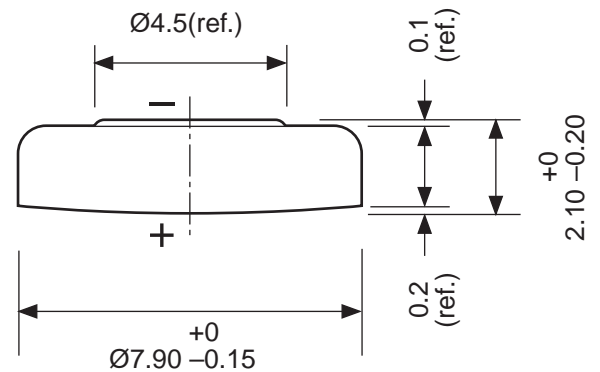

Unit : mm

## Typical Discharge Characteristics at 20°C

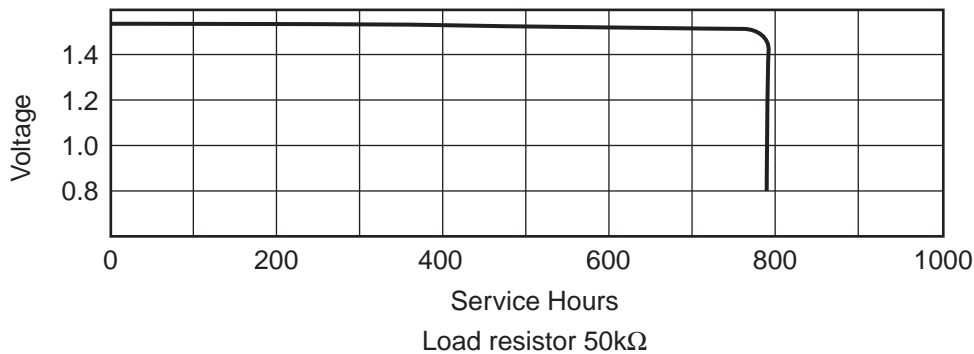

Average Service Capacity:  
 24 mAh (rated capacity at 50k $\Omega$  load,  
 cut off voltage 1.2V at 20°C)

Close circuit voltage:  
 1.25 Volts (min.) (load resistor 200 $\Omega$  at  
 20°C for 1 to 2 seconds)

## Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR58	SR58	362	V362	D362	SP362	SR721SW