

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXEF375

DOCUMENT: SCD 25229
 PCN: C55032
 REV LETTER: A
 REV DATE: MAY 16, 2003
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retardant Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 20 AWG Tin Plated Copper Clad Steel

Marking:

- ┌───┐ Raychem Logo and Voltage
- ⊗ 72
- XF375 ─── Part Identification
- ─── Lot Identification (can be on back)

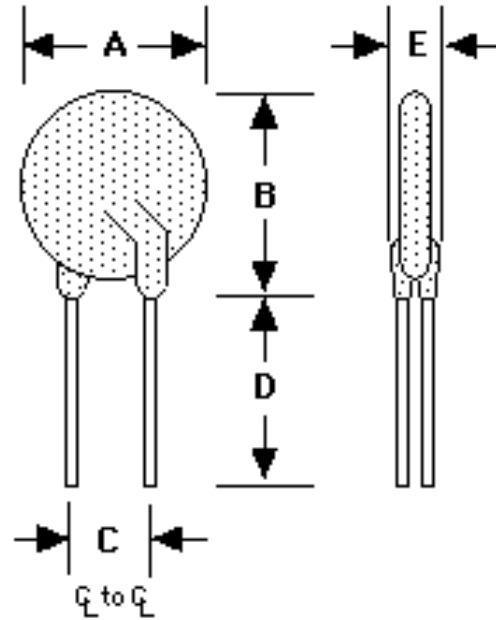


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	27.2	--	31.8	9.4	10.9	7.6	--	--	3.0
in*:	--	(1.07)	--	(1.25)	(0.37)	(0.43)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS :

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
AMPERES AT 20°C	AMPERES AT 20°C		OHMS AT 20°C		SECONDS AT 20°C, 18.75A	OHMS AT 20°C	WATTS AT 20°C
HOLD	HOLD	TRIP	MIN	MAX	MAX	MAX	NOMINAL
3.75	3.75	7.50	0.03	0.05	24.0	0.08	3.2

Recognitions: UL, CSA and TUV recognized.
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.