




# MBR2535CT THRU MBR2560CT

## 30.0 AMPS. Schottky Barrier Rectifiers



Voltage Range  
35 to 60 Volts  
Current  
30.0 Amperes


### Features

- ✧ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ Guardring for overvoltage protection
- ✧ High temperature soldering guaranteed:  
250°C/10 seconds, 0.25" (6.35mm) from case

### Mechanical Data

- ✧ Cases: JEDEC TO-220 molded plastic
- ✧ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs. max
- ✧ Weight: 0.08 ounce, 2.24 grams

### TO-220

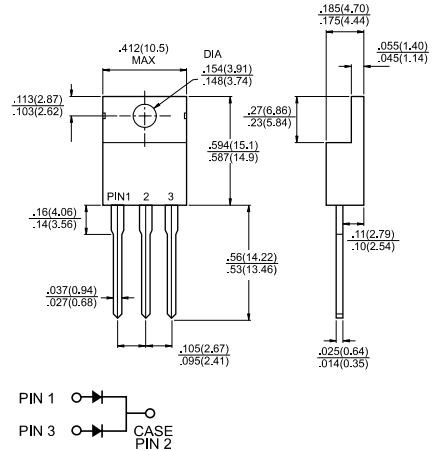

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	MBR2535CT	MBR2545CT	MBR2550CT	MBR2560CT	Units
Maximum Recurrent Peak Reverse Voltage	35	45	50	60	V
Maximum RMS Voltage	24	31	35	42	V
Maximum DC Blocking Voltage	35	45	50	60	V
Maximum Average Forward Rectified Current at T <sub>C</sub> =130°C	30				A
Peak Repetitive Forward Current (Rated V <sub>R</sub> , Square Wave, 20KHz) at T <sub>C</sub> =130°C	30.0				A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	150				A
Peak Repetitive Reverse Surge Current (Note 1)	1.0		0.5		A
Maximum Instantaneous Forward Voltage at (Note 2) I <sub>F</sub> =15A, T <sub>C</sub> =25°C I <sub>F</sub> =15A, T <sub>C</sub> =125°C I <sub>F</sub> =30A, T <sub>C</sub> =25°C I <sub>F</sub> =30A, T <sub>C</sub> =125°C	-	-	0.75	0.65	V
Maximum Instantaneous Reverse Current @ T <sub>C</sub> =25°C at Rated DC Blocking Voltage Per Leg @ T <sub>C</sub> =125°C (Note 1)	0.2	40.0	1.0	50.0	mA mA
Voltage Rate of Change, (Rated V <sub>R</sub> )	1,000				V/μS
Maximum Thermal Resistance Per Leg (Note 3) RθJC	1.5				°C/W
Operating Junction Temperature Range T <sub>J</sub>	-65 to +150				°C
Storage Temperature Range T <sub>STG</sub>	-65 to +175				°C

Notes: 1. 2.0us Pulse Width, f=1.0 KHz  
2. Pulse Test: 300us Pulse Width, 1% Duty Cycle  
3. Thermal Resistance from Junction to Case Per Leg

## RATINGS AND CHARACTERISTIC CURVES (MBR2535CT THRU MBR2560CT)

FIG.1- FORWARD CURRENT DERATING CURVE

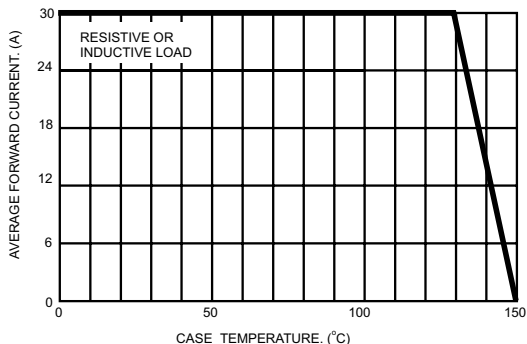


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

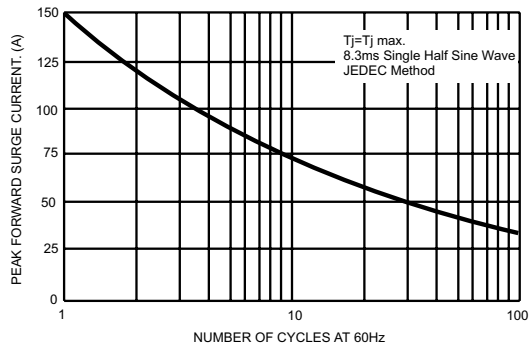


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

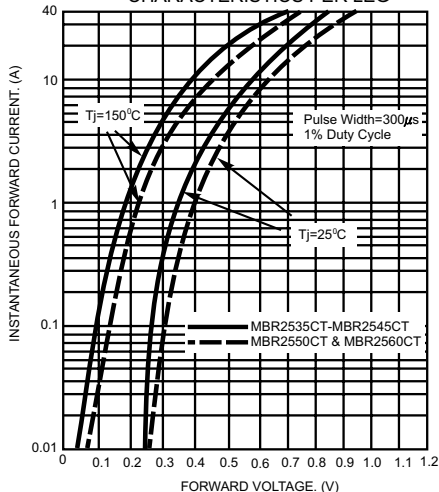


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

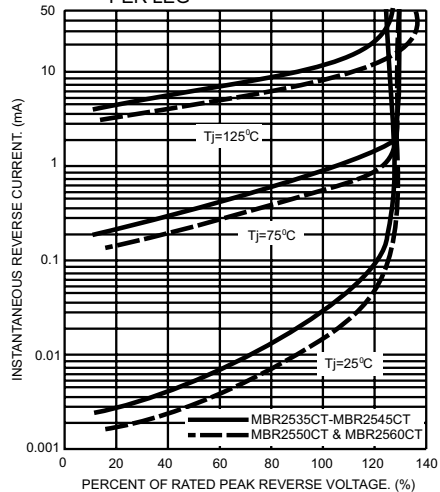


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

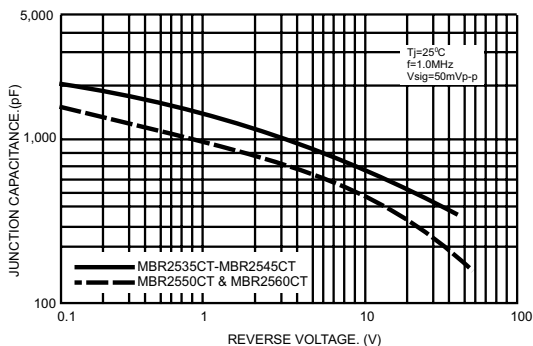


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

