





PORTAFUSIBILI  
 FUSE- HOLDERS  
 PORTE-FUSIBLES  
 SICHERUNGSHALTER

TIPO  
 TYPE  
 TYPE  
 TYP

PTF / 80  
 PTF / 80A

PER FUSIBILI  
 FOR FUSES  
 POUR FUSIBLES  
 FÜR SICHERUNGEN

5 X 20  
 6,3 X 32

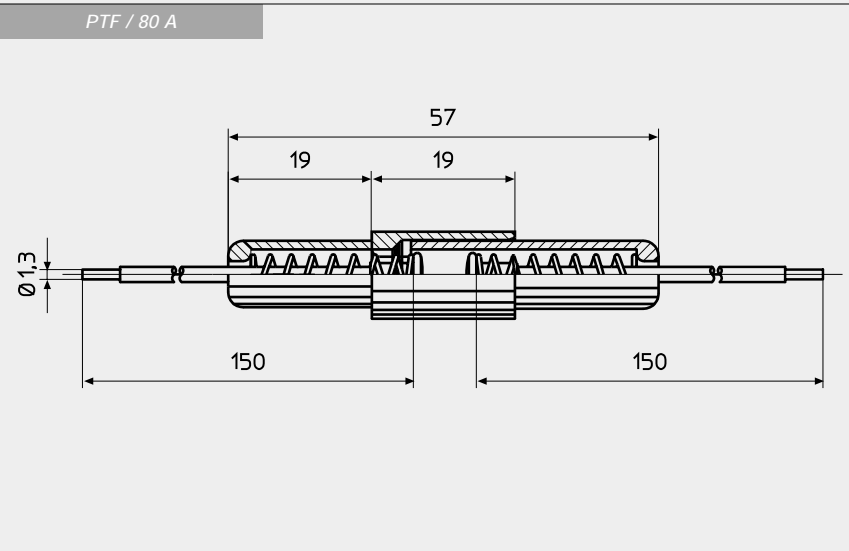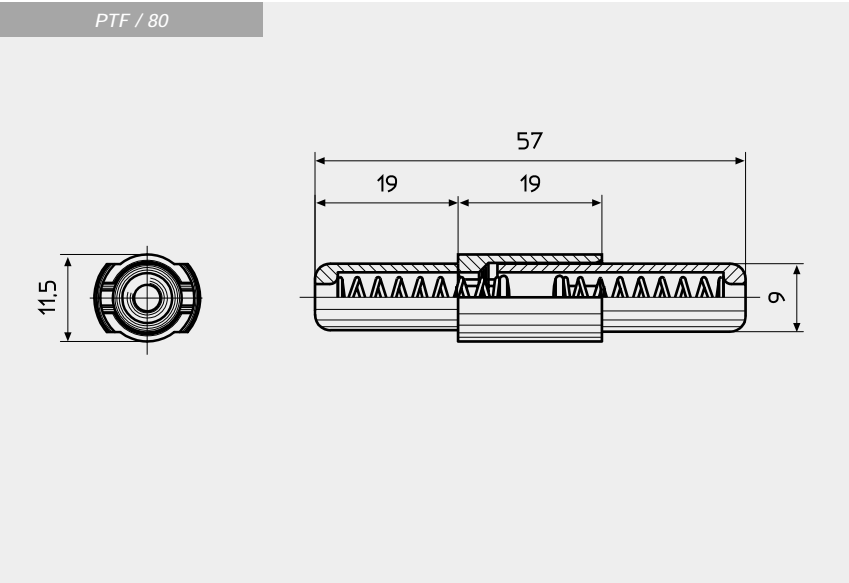


VOLANTE

IN-LINE

EN LIGNE

DRANTANSCHLUB



Corpo isolante Nero	Insulating body Black	Corps isolant Noir	Isolierkörper Schwarz	PA 6
Contatti	Contacts	Contacts	Kontakte	CuZn 37 + Ni
Cavo	Cable	Câble	Kabel	L= 150 mm-0,75 mm <sup>2</sup>
Categoria	Class	Catégorie	Baureihe	PC1
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	6,3 A
Tensione	Voltage	Tension	Betriebsspannung	250 V
Potenza dissipabile	Operating power	Puissance dissipable	Ausgangsleistung	1,6 W
Resistenza di contatto	Contact resistance	Résistance de contact	Übergangswiderstand	< 5 m Ω
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	>10 <sup>2</sup> M Ω
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	> 3000 Vac / 60 "