


Viewed on Component Side

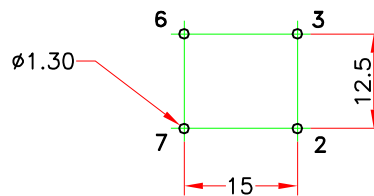

TECHNICAL DATA :

Core : Ø23 / Ø14 / H7 μ i 6000 Ferrite Material

Wire : Ø0.63 Grade 1 Class F

Rated Current Per Winding : 4A referred to 250V – 50Hz and +60°C ambient temperature

Rated Inductance Per Winding : 2.7mH +50% –30% at 10KHz ; 0.1mA

Rated DC Resistance Per Winding (Typical) : 45m Ω

Test Voltage Between Windings : 1500VAC – 50Hz , 2 sec

Climatic Category : DIN GKC (–40 to +125°C; humidity cat. C)

Case Material : PBT at 30% Fibreglass UL94V0

Packaging Unit : 328 pieces

RoHS compliance

Please, refer to general catalog for unspecified parameters.

a	
IND	DATE

Radiohm Specification



Designation : 42V30 4000

Part number : _____

Date : 02/01/2012

Preliminary :

Final :

Customer Specification Approval

Part number : _____

Signature : _____

Name : _____

Title : _____

Date : _____