


Capacitor, ceramic, 0.1 uF, +/-20% Tol, 50V, Z5U, Lead Spacing=0.2"

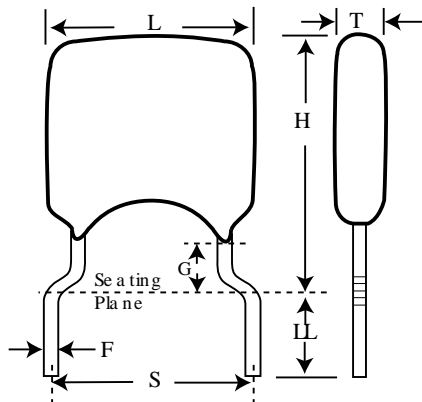

| Dimensions (in) | | |
|-----------------|-----------|---------------|
| Symbol | Dimension | Tolerance |
| L | 0.15 | MAX |
| H | 0.23 | MAX |
| T | 0.1 | MAX |
| S | 0.2 | +/-0.03 |
| LL | 0.276 | MIN |
| F | 0.02 | +0.004/-0.001 |
| K | 0.02 | |

Notes:

- Voltage code from part number
- EIA capacity code

| General Information | |
|---------------------|-------|
| Supplier: | KEMET |

| Specifications | |
|--------------------------|---------------------------|
| Capacitance: | 0.1 uF |
| Lead Spacing: | 0.2" |
| Voltage: | 50V |
| Temperature Coefficient: | Z5U |
| Tolerance: | +/-20% |
| Application: | Commercial Standard |
| Temperature Range: | +10/+85C |
| Body Type: | Radial Conformal (Dipped) |
| Lead Type: | pcleads |
| Lead Form: | Hockey Stick |
| Termination Type: | Tin |

| Packaging Specifications | |
|--------------------------|--------|
| Package Kind: | Ammo |
| Package Type: | Type 2 |
| Package Quantity: | 2500 |