

# 70 Diagonal Cutters

DIN ISO 5749


**special**  
**KNIPEX**  
 The cutting edges of KNIPEX Diagonal Cutters – made of Vanadium steel – have a long service life, are machined highly precise and are very sharp – for a clean cut of soft and hard wires.



70 01 160



70 02 160

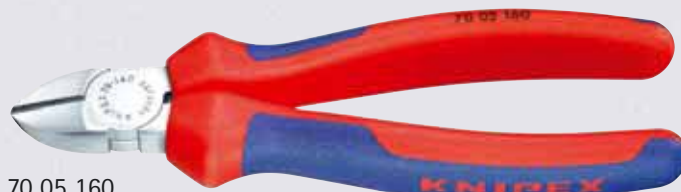

70 05 160




70 06 160

- ▶ the indispensable diagonal cutter for all-round use
- ▶ high quality material and precise workmanship for long service life
- ▶ precision cutting edges for soft and hard wire
- ▶ clean cutting at cutting edge tips; also in case of thin copper wires
- ▶ cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- ▶ narrow head style for use in confined areas
- ▶ Vanadium electric steel, oil-hardened and tempered


**Style 0:**  
▶ with bevel

**Style 1:**  
▶ with bevel  
▶ with opening spring

**Style 2:**  
▶ with small bevel

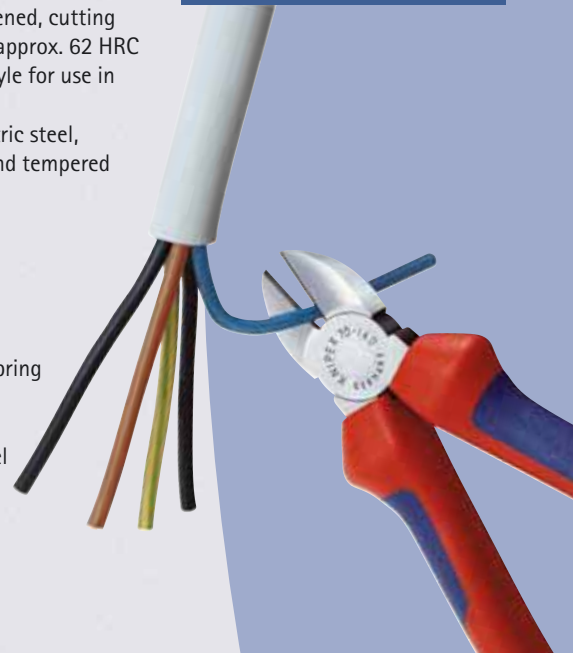

Article-No.	EAN-	Style	Head	Handles	Cutting capacities			g
					○	◐	◑	
Length	Code				ø mm	ø mm	ø mm	
mm	4003773-							
70 01	110	014324	polished	plastic coated	3.0	2.0	1.2	80
	125	013402			3.0	2.3	1.5	90
	140	013419			4.0	2.5	1.8	125
	160	013426			4.0	2.8	2.0	175
	180	018070			4.0	3.0	2.5	200
70 02	125	034025	polished	with two-colour dual component handles	3.0	2.3	1.5	115
	140	023098			4.0	2.5	1.8	155
	160	034032			4.0	2.8	2.0	205
	180	034049			4.0	3.0	2.5	250
70 04	140	018100	chr. plated	chrome plated	4.0	2.5	1.8	105
70 05	125	039501	chrome plated	with two-colour dual component handles	3.0	2.3	1.5	115
	140	039488			4.0	2.5	1.8	155
	160	039600			4.0	2.8	2.0	205
	180	043706			4.0	3.0	2.5	250
70 06	125	018124	chrome plated	insulated with two-colour dual component handles	3.0	2.3	1.5	120
	140	040293			4.0	2.5	1.8	160
	160	021995			4.0	2.8	2.0	210
	180	033813			4.0	3.0	2.5	255
70 07	160	018155	chrome plated	plastic dipped insulated	4.0	2.8	2.0	240
	180	018179			4.0	3.0	2.5	285
70 11	110	018193	polished	plastic coated	3.0	2.0	1.2	80
70 15	110	029649			3.0	2.0	1.2	105
70 26	160	018223	chrome plated	insulated with two-colour dual component handles	4.0	-	-	210
					1000 V IEC / DIN EN 60900 VDE-tested			



Cuts fine wires cleanly over the complete length of the blades



Slim head style and precise cut at blade tips: Advantageous when working in confined areas