



Bussbar configuration (top view)

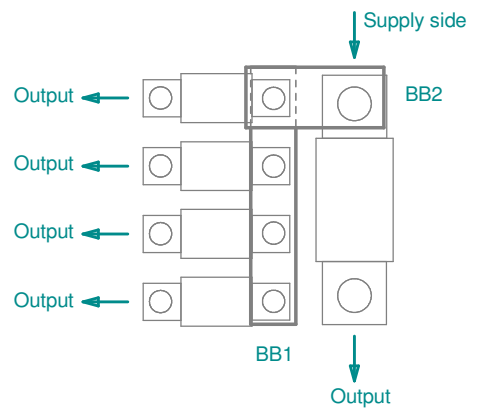

Note: BB2 can be placed on other side of megaOTO fuse, also switching supply and output

Additional information:
 Bussbar dimensions: BB1 1.5x12x68mm, BB2 1.85x16x33.5mm (WxHxL)
 Bussbar dimension tolerance: W: ± 0.3mm, H: ± 0.5mm, L: ± 1.0mm
 Bussbar material: Copper, Cu
 Max fuse rating: 4 x 200A midiOTO, megaOTO not limited
 Torque range: midiOTO (M5) 2 - 3 Nm, megaOTO (M8) 7 - 9 Nm

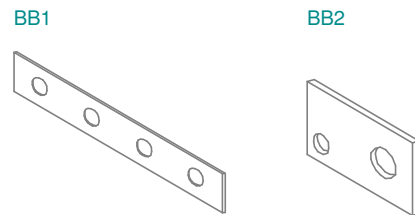

Revisions			Date	Appr.
	Date	Type	Drawn	04/09
a	06/10	added cable hole dimensions	Checked	03/18
b	02/11	updated dimensions	Standards	
c	07/11	added bussbar tolerances	Approved	03/18
d	03/18	updated dimensions		



Scale		1 : 2	Title		HMD4-MG1, holder midiOTO, megaOTO
Projection			Drawing type		schematic
			Drawing number		HMD4-MG1 drawing 1
			Sheet		1 of 1
			Layers / Sheet		01 23 6 89 11 Sheet 01