



FEMALE HEADERS

Female header

Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Phosphor bronze
Rated current:	3 Amp.
Rated voltage:	150 V _{RMS} /V _{DC}
Withstand voltage:	500 V _{RMS} for one minute
Operating temperature:	-40°C to +105°C
Max. soldering temp.:	260°C for 10 seconds

pitch	rows	row distance	orientation	termination
2,54	1		right angled	through hole

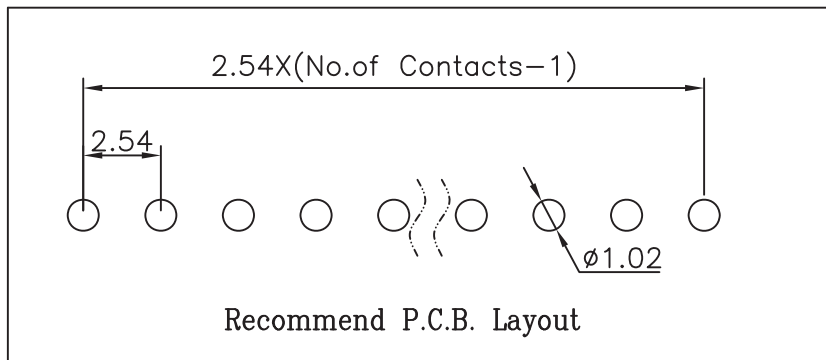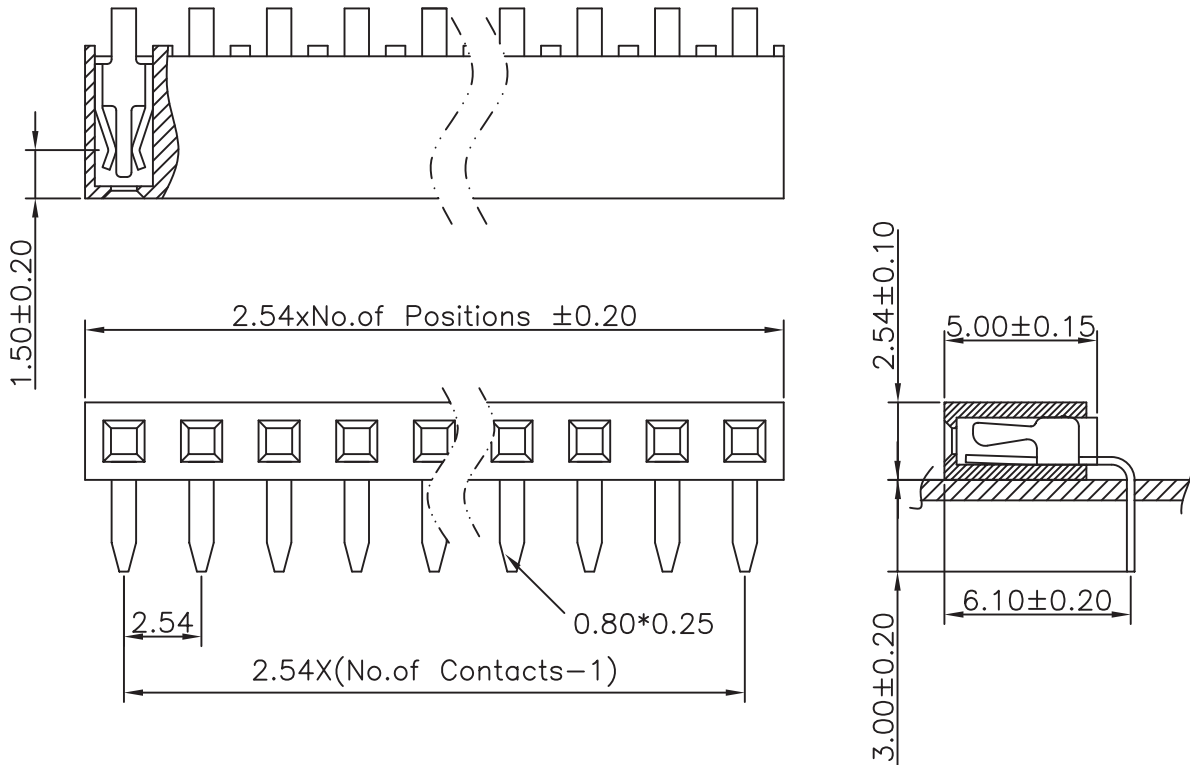

n = No. of contacts

Pincount: 010
Plating: F = Au

Order code: **904-1-010-0-NFX-XS0-0-0-0A07**

Part No.: **12050100068**