



# Elektrotechnik Karl-Heinz Mauz GmbH


**MS4.3-42** (Artikel-Nr. 200640)

**EKULIT**


**SPECIFICATIONS:**

TYPE	UNIT	MS4.3-42
Sensitivity (0dB=1V/Pa. 1kHz)	dB	-42±3
Directivity		Omnidirectional
Output impedance	Ohm	100@1KHz, 0dB=1V/Pa
Current consumption	mA	0.14
Supply voltage	V	1.5-3.3 (3.0)
Typical input referred noise	dB SPL	35 (A-weighted)
Signal to noise ratio	dB	59
Maximum input sound level	dB	At 100dB SPL, THD<1% At 114dB SPL, THD<=10%
Operating temperature	°C	-30 ~ +100°

Dimensions :  
(Unit: mm)

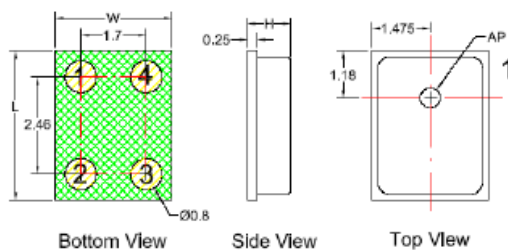


Typical Frequency response curve:

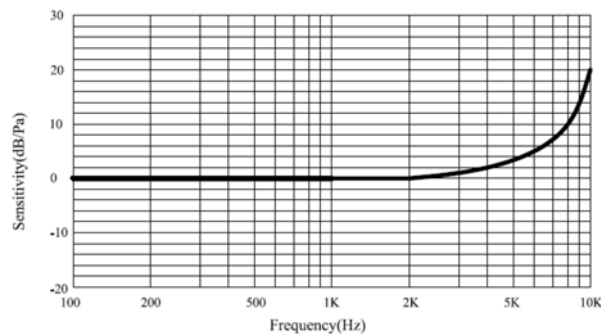

Item	Dim.	Tol. (±)	Units	Pin Output	
				Pin #	Function
Height (H)	1.1	0.10	mm	1	Power
Length (L)	3.76	0.10	mm	2	Ground
Width (W)	2.95	0.10	mm	3	Ground
Weight	0.023	0.005	g	4	Output
Acoustic Port (AP)	0.5	0.10	mm		

Measurement Circuit :

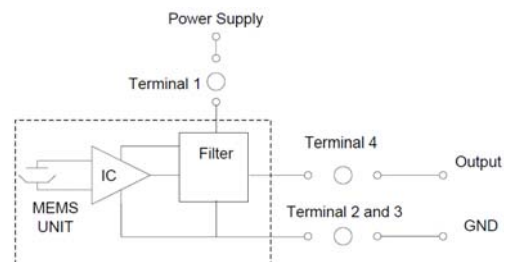

Adresse: Felix-Wankel-Str. 35 • 73760 Ostfildern/Nellingen

Tel: +49-711/3414023

Fax: +49-711/3414024

E-mail: info@ekulit.de

Web site: www.EKULIT.de