

Products

Home > Products > AC / DC Type (Pin) > PF-35A29EPD-48VQ

search

SMD Magnetic Buzzer
SMD Piezo Electric Sounder
Piezo Electric Sounder
Magnetic Buzzer
Piezo Electric Buzzer (PK)
Piezo Electric Buzzer (PF)
DC Type (Pin)
DC Type (Wire)
AC / DC Type (Pin)
Piezo Electric Buzzer (PL)
Piezo Electric Buzzer (PFD)
Piezo Electric Buzzer (PLD)
Piezo Electric Buzzer (PM)
Mini Microphone
Piezo Siren / Horn Siren
Horn Speaker
Speaker
Piezo Electric Ceramic Element
Piezo Electric Speaker
Wireless LED Siren

AC / DC Type (Pin)



PF-35A29EPD-48VQ


Material and Weight

Housing	ABS 757 UL94HB Plastic
	Resin
Color	Black
Pin	Tin Plated Brass
Weights (g)	42.2


Electrical Characteristics

Oscillation Frequency	2.9 ± 0.5	KHz
Operation Voltage	37 ~ 52	Vdc / AC
Rated Voltage	48	Vdc / AC
Current Consumption (Max.)	20 at Rated Voltage	mA
Sound Pressure Level (Min.)	90 at 30 cm at Rated Voltage	dB
Tone / Pulse Rate	Fast Pulse 3.0	
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-30 ~ +80	°C

Dimensions

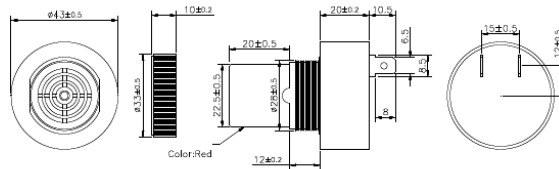

頻響曲線 Typical Frequency Response Curve

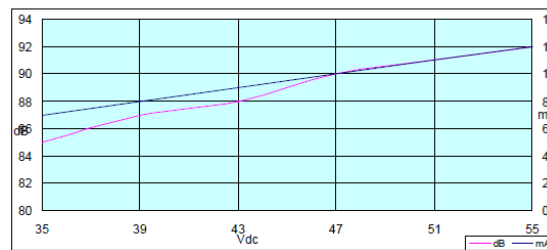

Contact us

If you need any further information, please don't hesitate to contact us.

Michael Kuo

Tel: +886-2-2601-3311#120
E-mail: michael@hitpoint.com.tw

Fax: +886-2-2601-3898
E-mail: hitpoint@hitpoint.com.tw