


Data Sheet

Type Number:	5122	
System:	Nickel Metal Hydride/ KOH Electrolyte	
Nominal Voltage [V]:	8.4	
Nominal Capacity C [mAh]:	170	
Typical Capacity C [mAh]:	180	
	at 28 mA / 7.00 V	
Weight, approx. [g]	47,5	
Dimensions [mm]:	min.	max.
Length [l]:	47.5	48.5
Width Facing [w]:	25.5	26.6
Height [h]:	15.0	15.7

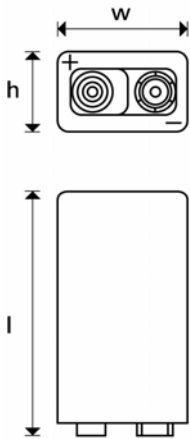

UL Recognition:	MH 13654 (N)	
Coding:	TBA	
Temperature Ranges [°C]	min.	max.
Storage: less than 30 days	-40	65
Discharge:	-20	65
Charge:	0	65
Charging Method:		
Normal Charging:	17 mA for 14 -16 h	
Accelerated Charging (20°C):	34 mA for 7 h	
	Time controlled, voltage control recommended	
Trickle Charging:	5.1 mA	
Overcharge (20°C):	17 mA up to 1 year	
Charge Retention [%] at 20°C:	90	
	Capacity available after 1 month Storage at 20°C	
Internal Resistance [Ohm]:	5.6	
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)	
Impedance [Ohm]:	0.9	
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)	
Max. Discharge Current (cont.) [mA]:	340	
Life Expectancy (typical):		
IEC 61951 Cycle:	> 500 Cycles	
Trickle Charge:	up to 5 years (20°C)	
Trickle Charge:	up to 2.5 years (45°C)	

Capacities based on normal charging