

Elektrotechnik Karl-Heinz Mauz GmbH

RMP-38SP-DT (Artikel-Nr. 183020)


EKULIT

SPECIFICATIONS:

TYPE	UNIT	RMP-38SP-DT
Oscillation Frequency	kHz	3.0±0.5
Operating Voltage	VDC	5~28
Rated Voltage	VDC	12
Sound Pressure Level	dB	Min. 85 at 100cm
Current Consumption	mA	Max. 18 at Rated Voltage
Tone		Constant
Weight	g	30
Housing Material		ABS (Black)
Operating Temperature	°C	-30~+85
Storage Temperature	°C	-30~+80

DIMENSIONS :

(Unit: mm)

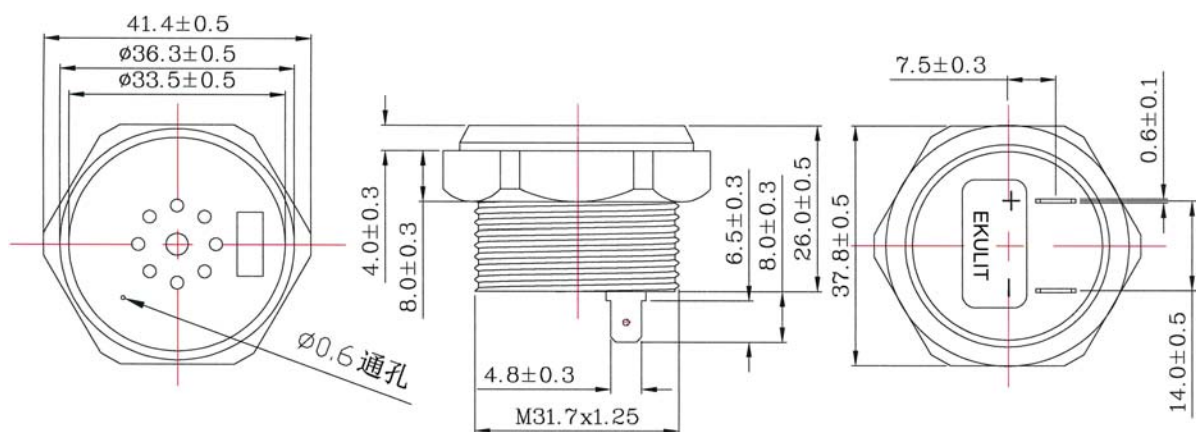

Elektrotechnik Karl-Heinz Mauz GmbH

RMP-38SP-DT (Artikel-Nr. 183020)

EKULIT


TESTING METHOD

Standard Measurement conditions


Temperature: $25 \pm 2^\circ\text{C}$ Humidity: 45-65%

Acoustic Characteristics:

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

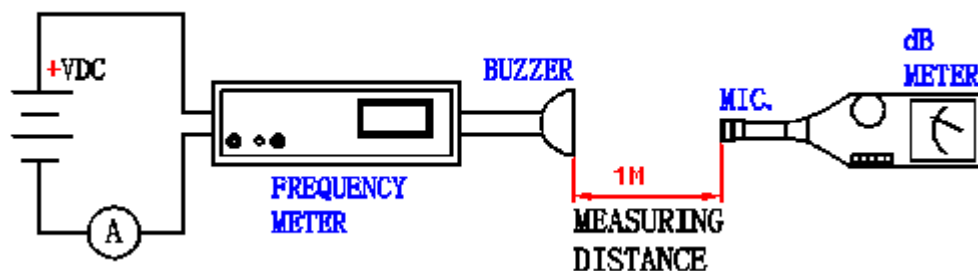

In the measuring test, buzzer is placed as follows:

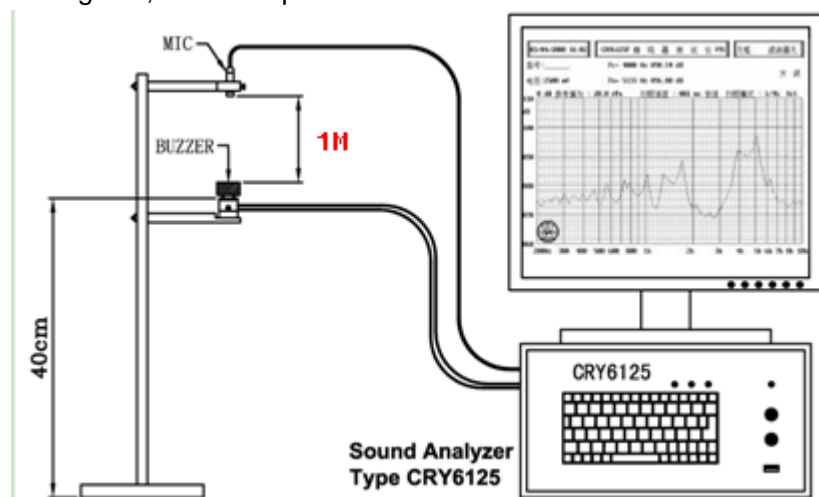



Elektrotechnik Karl-Heinz Mauz GmbH

RMP-38SP-DT (Artikel-Nr. 183020)

EKULIT

RELIABILITY TEST

NO.	ITEM	TEST CONDITION AND REQUIREMENT
1	High Temperature Test (Storage)	After being placed in a chamber with $85\pm 2^{\circ}\text{C}$ for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
2	Low Temperature Test (Storage)	After being Placed in a chamber with $-30\pm 2^{\circ}\text{C}$ for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at $40\pm 2^{\circ}\text{C}$ for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
4	Temperature Cycle Test	<p>The part shall be subjected to 5 cycles. One cycle shall be consist of:</p> <p>Allowable variation of SPL after test: $\pm 10\text{dB}$.</p>
5	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm . Allowable variation of SPL after test: $\pm 10\text{dB}$.
6	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours . Allowable variation of SPL after test: $\pm 10\text{dB}$.
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $+300\pm 5^{\circ}\text{C}$ for 3 ± 1 seconds . 90% min. lead terminals shall be wet with solder (Except the edge of terminals).
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds. No visible damage and cutting off.

Adresse: Felix-Wankel-Str. 35 • 73760 Ostfildern/Nellingen

Tel: +49-711/3414023

Fax: +49-711/3414024

E-mail: info@ekulit.de Web site: www.EKULIT.de




Elektrotechnik Karl-Heinz Mauz GmbH

RMP-38SP-DT (Artikel-Nr. 183020)

EKULIT

VOLTAGE / CURRENT / SOUND PRESSURE CHARACTERISTICS

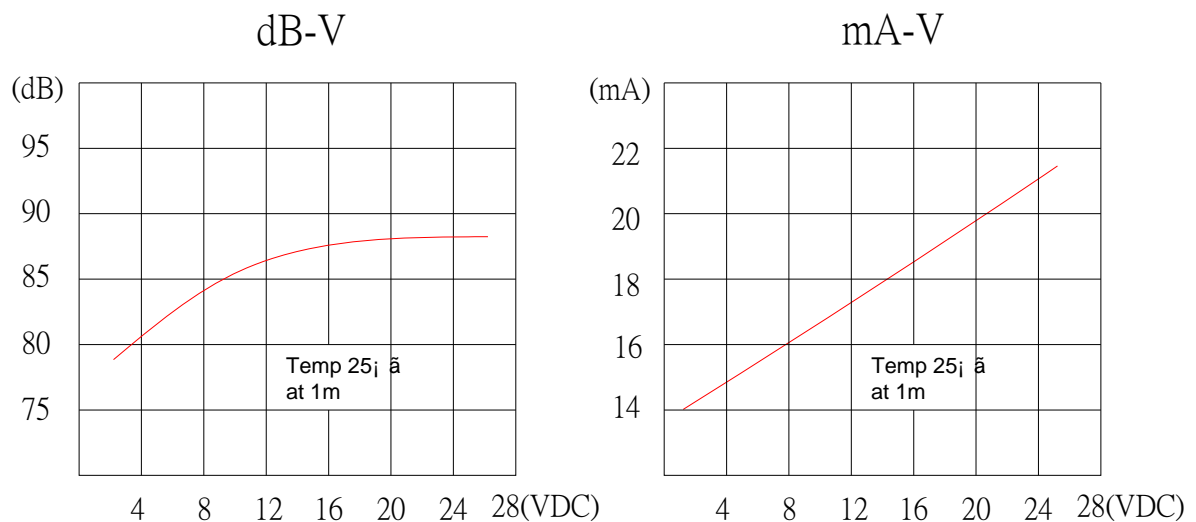

Adresse: **Felix-Wankel-Str. 35 • 73760 Ostfildern/Nellingen**

Tel: **+49-711/3414023**

Fax: **+49-711/3414024**

E-mail: **info@ekulit.de** Web site: **www.EKULIT.de**