


## PIN HEADERS

## Pin header

## Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Copper Alloy
Plating:	Tin over Nickel
Rated current:	3 Amp.
Rated voltage:	250 V <sub>RMS</sub> /V <sub>DC</sub>
Withstand voltage:	1000 V <sub>AC</sub> for one minute
Operating temperature:	-40°C to +105°C
Max. processing temp.:	260°C for 10 seconds

pitch	rows	row distance	orientation	termination
5,08	1		straight	through hole

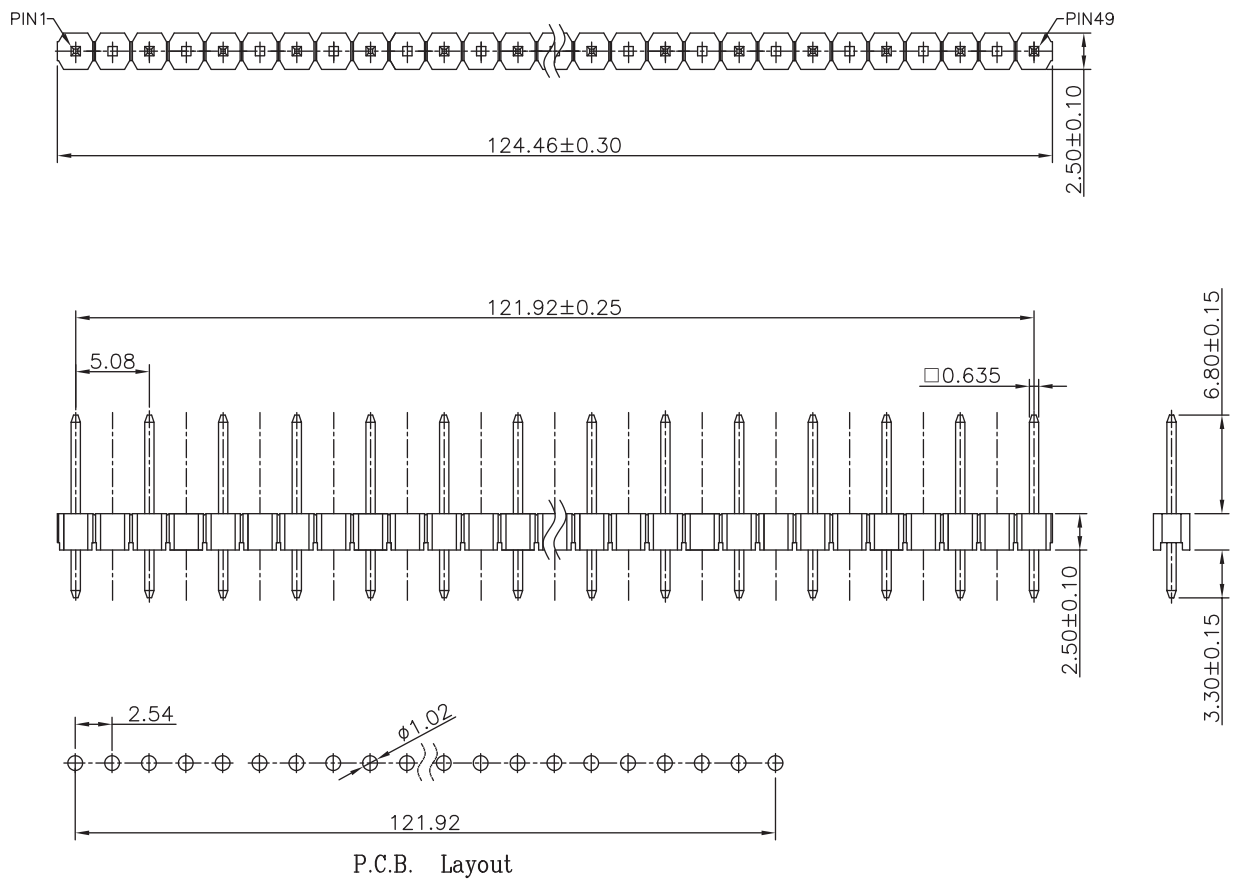

## Notes:

PIN 1,3,5,7,9,11,13,  
15,17,19,21,23,25,  
27,29,31,33,35,37,  
39,41,43,45,47,49 with contact

Pincount: 025

Plating: T = Sn

Order code:

087-1-V25-0-T-XS0-1260-0680-0330-0250A09

Part No.:

12050100268