



		Conditions	
cell type:		NiMH	
cell size:		AA	
nominal voltage:	1.2	V	
max. charge voltage:	1.5	V	
		at standard charge (0.1C / 20°C)	
capacity			
nominal:	2700	mAh	discharge at 0.2C
minimum:	2400	mAh	discharge at 0.2C
	2200	mAh	discharge at 1C
			1.0V end discharge voltage
			ta: 20°C
max. continuous discharge current:	5000	mA	ta: 0...45°C
charge		current	time
standard charge:	270	mA	14...16hrs
quick charge:	700	mA	4hrs
fast charge:	2700	mA	1hr
recommended charge termination control parameters:	0...5	mV	- ΔV (-deltaV)
	0.8...1	°C	temperature rise per minute
	45...50	°C	TCO (temperature cut off)
trickle charge current:	20...80	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 200	mA	no conspicuous deformation no leakage
internal resistance: (impedance)	≤ 35	mΩ	at 1KHz battery fully charged
life expectancy:	≥ 500	cycles	acc. IEC standard
self discharge			
charge retention:	≥ 60	%	after 28 days storage at 20°C
initial capacity:	≥ 800	mAh	within 30 days after delivery discharge at 0.2C
ambient temperature range:	0...45	°C	standard charge
	10...40	°C	fast charge
	0...45	°C	discharge (≥1C)
	- 20...65	°C	discharge (<1C)
	- 20...50	°C	storage (≤1month)
	- 20...40	°C	storage (≤3months)
	- 20...30	°C	storage (≤12months)
QCT1:	20/2300/30		
QCT2:	30/2150/35		

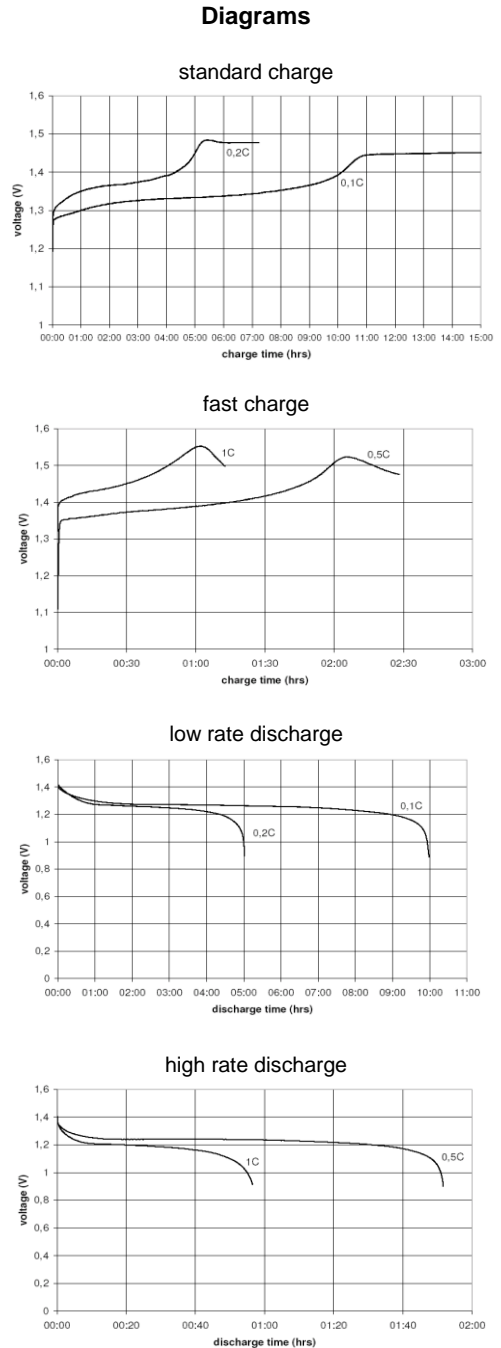

mechanical specifications		
cell dimensions		
diameter d1:	14.4 - 0.7	mm
diameter d2:	max. 5.5	mm
height h1:	50.5 - 0.5	mm
height h2:	min. 1.2	mm
weight:	30 ± 2	g
blister card dimensions:	123 x 85	mm
blister card weight (incl. batteries):	128	g



	ANSMANN Specifications for model:	AA - 2400mAh HyCell
		4pcs blister package
	data sheet no. / part no.	5030492
	supplier no.	702069
author / date	Gramlich / 14.02.2012	

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice