


Customer PN: R6192
产品图号: MWH08119BK

Version time	Elucidation	Change date	Change
A/1	增加线上标签	2016.10.22	陆剑

15	线上标签80*14MM(白底红字不干胶, 防水镀膜) white label with red letter	GBR00144	1	EA
14	Φ6黑色热缩管, L=10MM*3. (Shrink tube)	HR06028P01-B	0.03	M
13	接线端子 (endsplice), H7. 2*4*7, 2*L6. 9, 10-14AWG, 黄铜本色	DWJXD20003T-0	3	EA
12	2*4 (U) 型管, 黄铜本色	DF2U4G3LT-0	6	EA
11	品字尾内架, 白色 insert	JB5013001-W	2	EA
10	品字尾插头 (IEC-C13) (XR-501) COLOR: 黑色, PVC 55P. (*2)	BC7055PBK0011	0.049	Kg
9	SR-806 COLOR:black黑色, 外模55P PVC	BC7055PBK0011	0.02891	Kg
8	SR-806 COLOR:black黑色, 内模30P PVC.	BC7030PBK0011	0.02891	Kg
7	SR-806内架, 白色 (insert)	JB8060001-0	1	EA
6	2*4MM品字尾公插片, 16-18AWG, 黄铜镀镍 (terminal)	DA004001ST-1	3	EA
5	品字公外壳 (C14插头专用), 黑色	JB6023003-B	1	EA
4	品字公插座 (XR-602 IEC-C14) 10A 250V~ COLOR: 黑色, PVC 30P.	BC7030PBK0011	0.0225	Kg
3	H05VV-F 3G1.0mm ² COLOR: 黑色 截线长:L=640mm.	CV5VV3100A00101	1	EA
2	H05VV-F 3G1.0mm ² COLOR: 黑色 截线长:L=640mm.	CV5VV3100A00101	1	EA
1	H05VV-F 3G1.0mm ² COLOR: 黑色 截线长:L=1690mm.	CV5VV3100A00101	1	EA
NO.	DESCRIPTION	XIONGRUN PN	QTY	UNIT

DESCRIPTION	AC POWER CABLE	DRAW NO.	XR-0672361	UNIT	M M
PARTS NO		SCALE	NONE	DATE	22/03/2016
APPROVED		CHECKED		DRAWING	陆剑

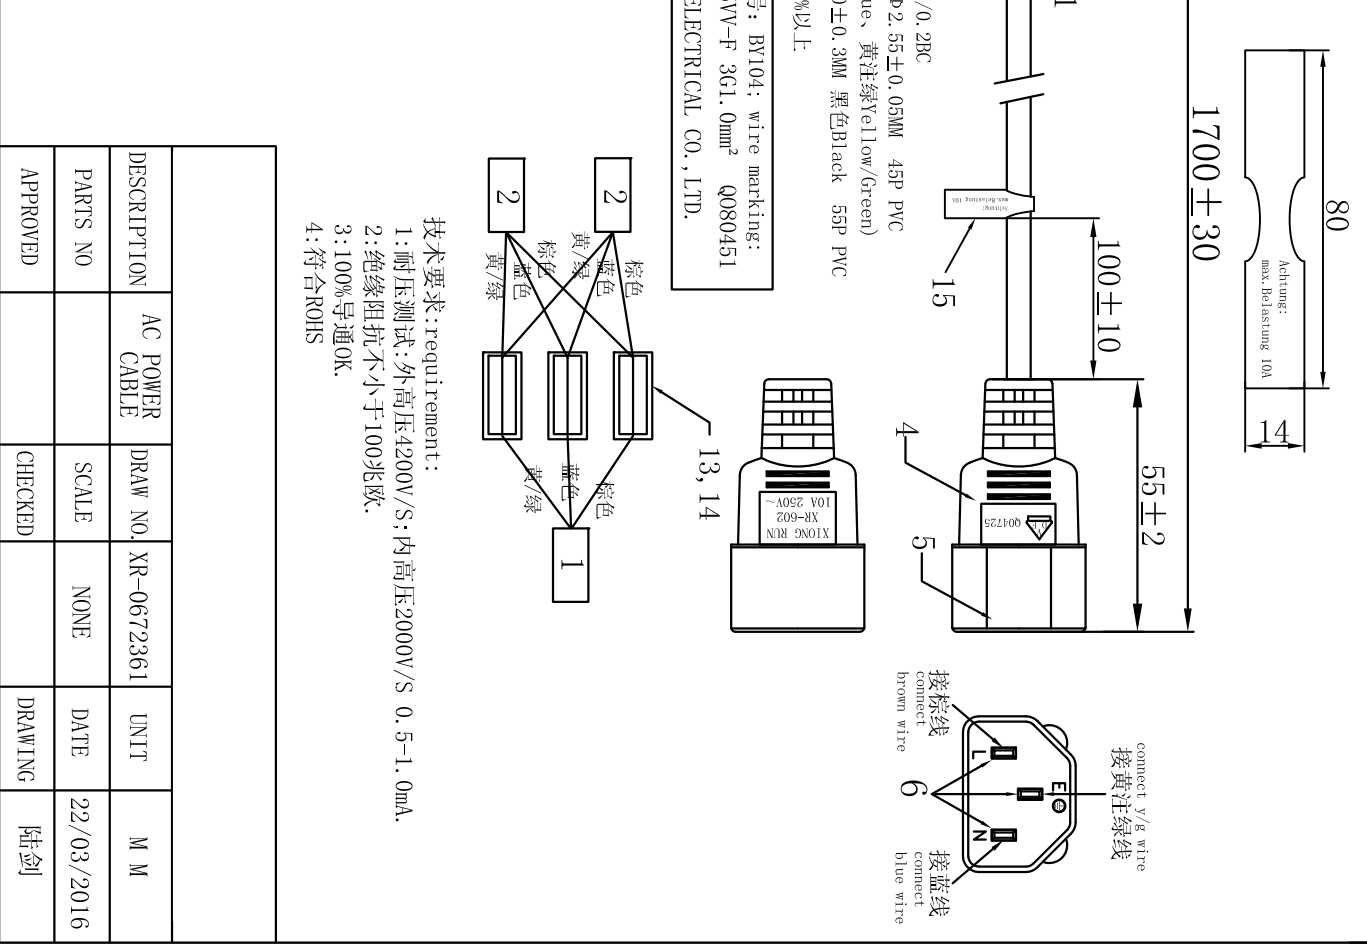

线材印字为凹印, 字轮编号: BY104; wire marking:
 ▲VDE▶ KEMA-KEUR H05VV-F 3G1.0mm² Q080451
 GUANGDONG XIONGRUN ELECTRICAL CO., LTD.

技术要求: requirement:
 1: 耐压测试: 外高压4200V/S; 内高压2000V/S 0.5-1.0mA.
 2: 绝缘阻抗不小于100兆欧.
 3: 100%导通OK.
 4: 符合ROHS

