

1

2

3

4


5

6

7

A

A

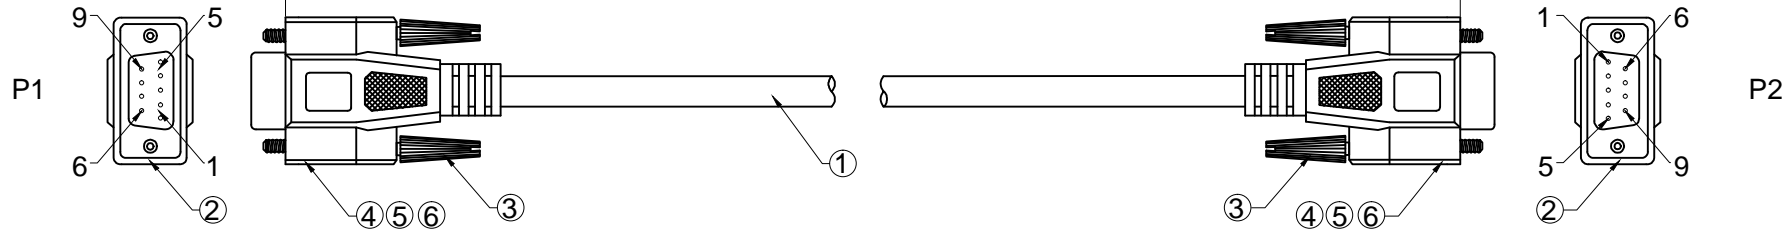


B

B

C

C

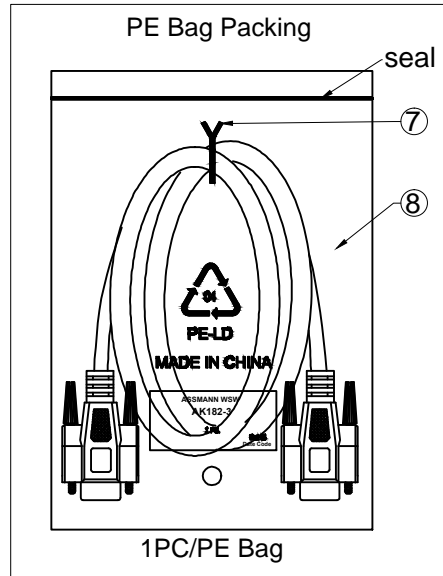

D

D

## ① PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
Shell	Shell

## Electrical test:

- 100% short, open, miss wire test
- Conduct resistance: 2 Ohm max.
- Insulator resistance: 5Mohm min.
- Hi-Pot: 300V DC/10ms

E

E

⑧	PE Bag	1pcs	Clear Print black "MADE IN CHINA"+ "1PC"
⑦	Tie	1pcs	White tie
⑥	Outermold	NA	PVC 45P Beige(BG002)
⑤	Innermold	NA	LD-PE
④	Tube	2pcs	Heat shrink tube black OD:Ø1.5*L15mm
③	Screw	4pcs	Screw #4-40UNC D-E L=32.5mm Nickel plated Insulator color:Beige(BG002)
②	CONN	2pcs	DB 9Pin Female,Pin:G/F Shell-Nickel Insulator color:Blue solder type
①	Cable	1pcs	No UL 28AWG(7/0.12TC)*9C+D+AL/Mylar Jacket PVC,Beige(BG002) OD:5.0mm
NO.	NAME.	Q'TY	SPECIFICATION

F

F

RoHS compliant

Unit:mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	05.04.2016	Amy	
					Approved	05.04.2016	Amy	ASSMANN WSW-No. AK182-3
DIM	TOL	①	Update pin assignment	20.12.2018	Xavier	Drawing-No. ASS 7602 CA rev01		
		②	Drawn	05.04.2016	Amy	Replace Sheet		
Angle	TOL	Id.	Modification	Date	Name			

G

G

H

H

1

2

3

4

5

6

7