


1	2	3	4	5	6	7
---	---	---	---	---	---	---

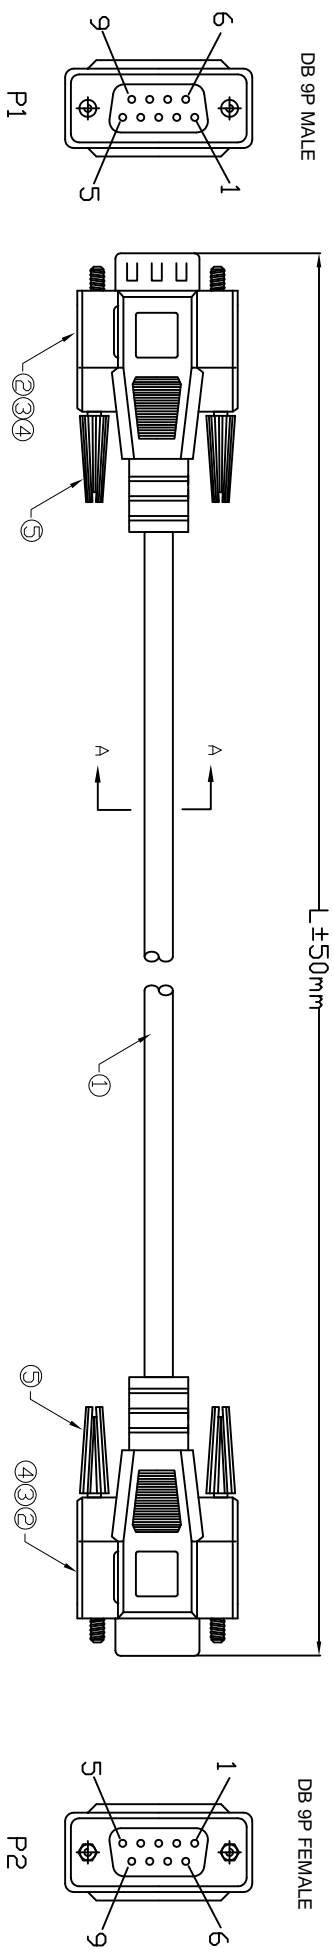

- NOTES:
1. CABLE : NON-UL 28AWG(7/0.125TC)*9C+D(7/0.12TC)+AL/MY OD:5.0±0.20mm JACKET COLOR: BEIGE
 2. CONNECTOR:

- P1: DB 9P/M,SOLDER,BLUE INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
P2: DB 9P/F,SOLDER,BLUE INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
- 3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BEIGE
 - 4.INSIDE MOLDING: TRANSPARENT PE.
 - 5.THUMB SCREW: #4-40 UNC, MOLDED TYPE,PVC 45P,COLOR:BEIGE
 - 6.ELECTRICLE TEST:
- (1)100% OPEN SHORT & MIS WIRE TEST.
 - (2)CONTACT RESISTANCE 3 ohm Max .
 - (3)INSULATION RESISTANCE 10M ohm Min .
 - (4)HI-POT TEST:DC 300V/10ms

PIN Assignment	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
Shell	Drain
	Shell

ASSMANN WSW P/N	LENGTH
AK-610203-020-E	2.0 M
AK-610203-030-E	3.0 M
AK-610203-050-E	5.0 M
AK-610203-100-E	10.0 M

Scale	FREE								
	TOLERANCE								
X.	±X								
X.X	±X								
X.XX	±X								
DIM	TOL								
X.°	±X°								
X.X°	±X°								
Angle	TOL								

②	Update drawing	17.06.2014	Joanna		
①	Drawn	01.07.2009	Rale		

Date	Name	Date	Name
01.07.2009	Rale	17.06.2014	Joanna

Customer-No.	ASSMANN WSW-No.	AK-610203-xxx-E
Drawing-No.	ASSMANN WSW P/N	AK-610203-020-E
Replace	ASSMANN WSW No.	AK-610203-030-E
		AK-610203-050-E
		AK-610203-100-E

ASSMANN WSW components

ASS 3622 CA rev02

ROHS compliant
Unit:mm

1	2	3	4	5	6	7
---	---	---	---	---	---	---