



### POWER SUPPLY SPECIFICATION

MODEL NO.	MW MA06EU-L	ISSUE DATE	2022.03.25
CUSTOMER	Minwa standard	REF. NO.	

#### INPUT

INPUT VOLTAGE	100 to 240 Vac
INPUT FREQUENCY	60 / 50 Hz
NO LOAD POWER CONSUMPTION (@230V)	< 0.1W
INPUT FULL LOAD CURRENT (at 100 Vac)	155m A

#### OUTPUT

OUTPUT VOLTAGE (DC)	3.0 / 4.5 / 5.0 / 6.0 / 7.5 / 9.0 / 12.0V
OUTPUT CURRENT	3.0/ 4.5 / 5.0/ 6.0V-1.0A ;7.5V-0.9A;9.0V-0.8V ;12.0V-0.6A

#### OVERALL PERFORMANCE

TOTAL OUTPUT POWER	7.2W Max
AVERAGE ACTIVE EFFICIENCY	Min 69.642% (for 3.0V); Min72.814% (for 4.5V); Min 73.623% (for 5.0V); Min 78.881% (for 6.0V); Min 79.613% (for 7.5V); Min 80.008% (for 9.0V); Min 80.008% (for 12.0V)
EFFICIENCY AT LOW LOAD (10%)	Min 59.6% (for 3.0V); Min 62.8% (for 4.5V); Min 63.6% (for 5.0V); Min 68.8% (for 6.0V); Min 69.6% (for 7.5V); Min 70.0% (for 9.0V); Min 70.0% (for 12.0V)

#### PROTECTION

<input checked="" type="checkbox"/> OVER CURRENT PROTECTION	<input checked="" type="checkbox"/> SHORT CIRCUIT PROTECTION
<input checked="" type="checkbox"/> OVER VOLTAGE PROTECTION	<input checked="" type="checkbox"/> L.P.S (Limits for power source)
<input checked="" type="checkbox"/> OVER POWER PROTECTION	<input type="checkbox"/> AUTOMATIC THERMAL PROTECTION

#### HI-POT

INPUT TO OUTPUT	3000Vac 5 mA 50 Hz
INPUT TO CASE	3000Vac 5 mA 50Hz
OUTPUT TO CASE	500 Vac 5 mA 50Hz
ISOLATION RESISTANCE	100 M Ohms I/P-O/P I/P/Enclosure
APPLIANCE	Class II

#### ENVIRONMENTAL

OPERATING TEMPERATURE	0 °C to 25 °C
STORGE TEMPERATURE	-20 °C to 60 °C
OPERATING HUMIDITY	20%-85% RH. NON-CONDENSING
STORGE HUMIDITY	10%-90% RH. NON-CONDENSING

#### SAFFTY STANDARDS

SAFETY STANDARDS	EN 61558-2-16:2009+A1:2013 EN IEC 61558-1:2019
EMC STANDARDS	<a href="#">EN IEC 61204-3:2018</a>

#### RELIABILITY

MTBF	30000 Hours min
BURN-IN	4 Hours 25°C, full load, 220Vac, 50Hz

#### MECHANICAL SPECIFICATION




**POWER SUPPLY SPECIFICATION**

MODEL NO.	MW MA06EU-L	ISSUE DATE	2022.03.25
CUSTOMER	Minwa standard	REF. NO.	

DIMENSION	68.4mm(L)*38.7 mm(W)* 31.1mm(H) (excluded plug) 68.4mm(L)*38.7 mm(W)* 68.4mm(H) (included plug)
WEIGHT	90g MAX exclude packing
INPUT PLUG	Direct plug-in EU type
OUTPUT CORD	PVC, Length 1.8m
OUTPUT PLUG	Depends on client request

**Appearance**

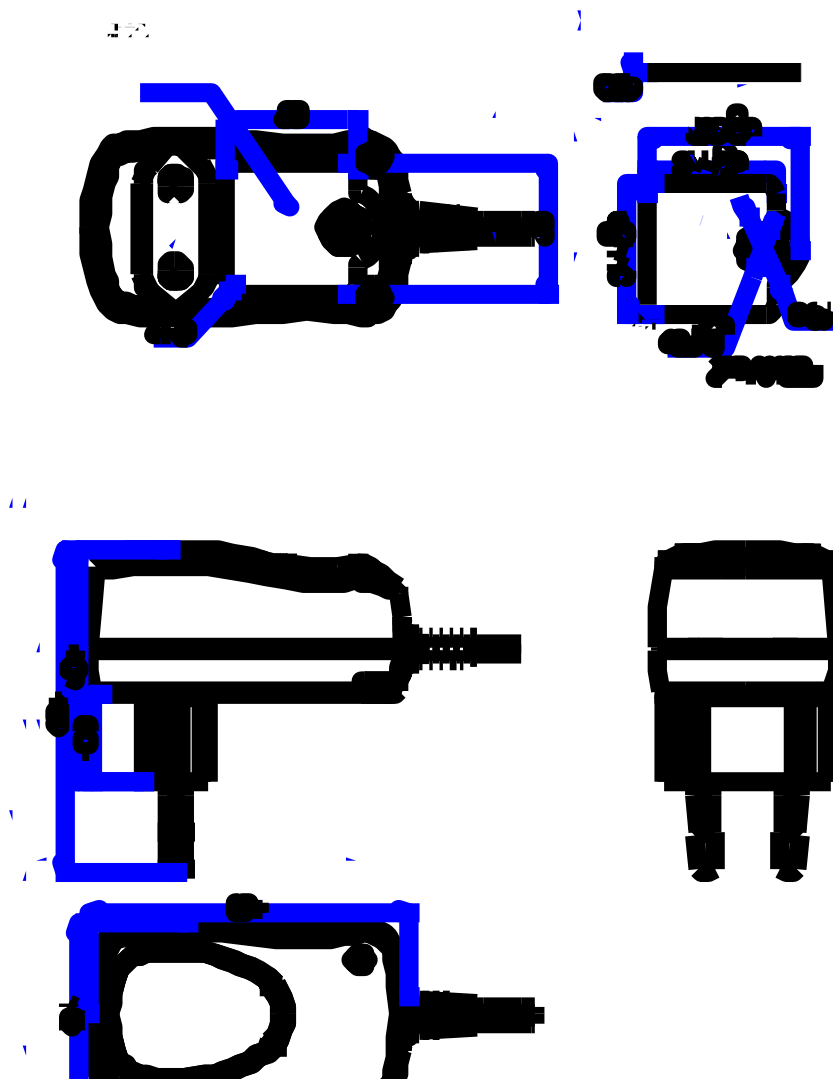

APPROVE:

AUDITING:

CONNER: