

Constant Voltage LED Power Supply FCV Ultrathin Series

SLD150-24VFD-EU1
SLD150-48VFD-EU1
SLD200-24VFD-EU1
SLD200-48VFD-EU1



Product description:

This type of power supply is an exclusively designed stabilized power supply for LED lamp. With constant voltage (CV) technology, it is suitable for constant voltage lamps (24V/48V) connected in parallels. It also can be dimmable from 0.1%-100% and colour control (DT8) of CCT(CorrelatedColorTemperature) through DALI2.0. The built-in protection circuit will shut down the power supply in case of such faults as: open circuit, short circuit, over load. The power supply will restart automatically after fault correction.



optional
(only for 48V version)

Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493
EN62386:101,102,207,209


Characteristics:

- Independent power supply for constant voltage LED lamp
- Class II protection against electric shock from direct and indirect contact
- Ultraslim design only 22mm on height
- Standby power consumption $\leq 0.5W$
- Meet L-N 1KV surge immunity level
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after removal of fault conditions
- Class I and II lamp application
- ECO design, comply with ERP directives
- Comply with DALI2.0 deepin dimming to 0.1%
- Warranty : 5 Years


Specifications :

Model	SLD150-24VFD-EU1	SLD150-48VFD-EU1	SLD200-24VFD-EU1	SLD200-48VFD-EU1	
Output	turn on time(S)	comply with DALI2.0	comply with DALI2.0	comply with DALI2.0	comply with DALI2.0
	output power(W) ¹	150	150	200	200
	output voltage(V)	24	48	24	48
	output voltage tolerance	±3%	±3%	±3%	±3%
	ripple voltage(mV)	400	600	400	600
	working current range(A)	0-6.25	0-3.13	0-8.33	0-4.16
	dimming interface	supplementary insulation DALI interface	supplementary insulation DALI interface	supplementary insulation DALI interface	supplementary insulation DALI interface
	dimming range	0.1%-100% linear & exponent	0.1%-100% linear & exponent	0.1%-100% linear & exponent	0.1%-100% linear & exponent
	CCT Adjustable	Yes	Yes	Yes	Yes
Input	rated DC supply voltage(Vdc)	220-280VDC	220-280VDC	220-280VDC	220-280VDC
	rated supply voltage(Vac)	220-240	220-240	220-240	220-240
	voltage range(Vac)	198-264	198-264	198-264	198-264
	line frequency(Hz)	0/50/60	0/50/60	0/50/60	0/50/60
	input current(A)	0.75	0.75	0.75	0.75
	efficiency ²	≥92.5%@full load	≥93.5%@full load	≥92.5%@full load	≥93.5%@full load
	average efficiency ³	≥91%@full load	≥91.5%@full load	≥91%@full load	≥91.5%@full load
	standby no load power consumption(W)	≤0.5W	≤0.5W	≤0.5W	≤0.5W
	power factor	0.95@full load	0.95@full load	0.95@full load	0.95@full load
	inrush current(Ipk) ⁴	80A/50µs	80A/50µs	80A/50µs	80A/50µs
Protection	short circuit protection	hiccup mode, restart automatically after fault correction.	hiccup mode, restart automatically after fault correction.	hiccup mode, restart automatically after fault correction.	hiccup mode, restart automatically after fault correction.
	over load protection	exceed maximum rated load times 1.1	exceed maximum rated load times 1.1	exceed maximum rated load times 1.1	exceed maximum rated load times 1.1
	automatic restart	hiccup mode, restart automatically after fault correction.	hiccup mode, restart automatically after fault correction.	hiccup mode, restart automatically after fault correction.	hiccup mode, restart automatically after fault correction.
	surge capacity	L-N: 1KV	L-N: 1KV	L-N: 1KV	L-N: 1KV
Ambient and Life	Ta(°C)	-20...50	-20...50	-20...40	-20...40
	Tc max.(°C)	max.90	max.90	max.90	max.90
	Storage Temperature(°C)	-30...80	-30...80	-30...80	-30...80
	ambient humidity range	5%...85%RH, Not condensing	5%...85%RH, Not condensing	5%...85%RH, Not condensing	5%...85%RH, Not condensing
	nominal life-time(hrs)	50'000@Tc	50'000@Tc	50'000@Tc	50'000@Tc
	weight(g)	400	400	400	400
Other	dimensions (L×W×H)(mm)	402x30x22	402x30x22	402x30x22	402x30x22
	casing material	Plastic	Plastic	Plastic	Plastic
	housing colour	White	White	White	White
	type of protection	IP20	IP20	IP20	IP20
	protection class	class II	class II	class II	class II
Note	<p>1. Tolerance:includes set up tolerance, line regulation and load regulation. 2. Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3. Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic average of these four values. 4. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p>				

Dimensions(mm):

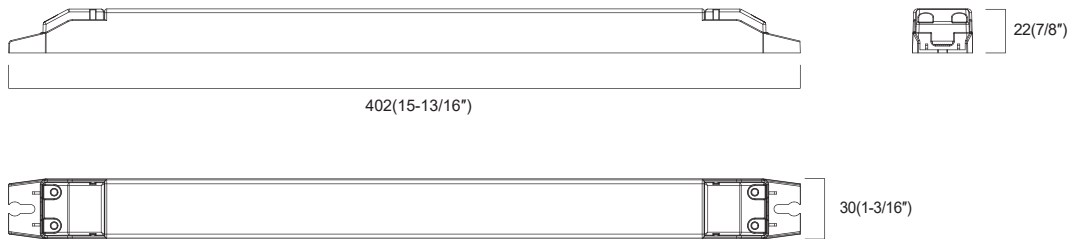

Wiring Diagram

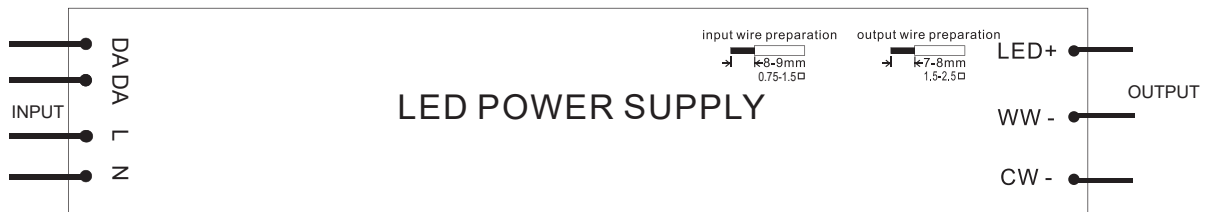

Sales & Technical Support:

SELF Electronics Co.,Ltd.(Headquarters)

Add: No. 1345 JuXian Road, Ningbo Hi Tech Park, Ningbo, China 315103
Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)
+86-574-2880-5678 (for Chinese assistance)
Fax: +86-574-28805656
E-mail: sales@self-electronics.com
<http://www.self-electronics.com>

SELF Electronics Co.,Ltd.,Shenzhen Office

Add: Room2007, Xinglang Xuan, Xinghemingju, Fuming Rd.,
Futian District, Shenzhen
Tel: +86-755-8355-8850
Fax: +86-755-8355-8840
E-mail: szsales@self-electronics.com

SELF Electronics Germany GmbH

August-Horch-Str. 7, 51149 Cologne
Phone: +492203-18501-0
Fax: 492203-18501-199
E-mail: saleseu@self-electronics.com