

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXEF020

DOCUMENT: SCD 25215
 PCN: E76239
 REV LETTER: A
 REV DATE: MAY 16, 2003
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retardant Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 24 AWG Tin Plated Copper Clad Steel

Marking:

- Raychem Logo and Voltage
- XX 60
- XF020 — Part Identification
- — Lot Identification (can be on back)

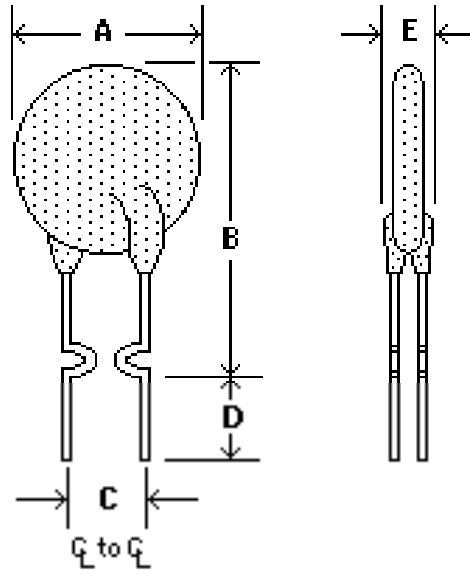


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.4	--	11.7	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.29)	--	(0.46)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS :

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 20°C		OHMS AT 20°C		SECONDS AT 20°C, 1.0A	OHMS AT 20°C	WATTS AT 20°C
HOLD	HOLD	TRIP	MIN	MAX	MAX	MAX	NOMINAL
0.20	0.20	0.40	1.83	2.75	2.2	4.40	0.41

Recognitions: UL, CSA and TUV Recognized
 Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b).
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.