





Buchsenleiste / Female header

Technical data:




Pitch: 2,00 mm
 Insulating material: Thermoplast UL94V-0
 Contact material: Copper alloy
 Rated current: 2 Amp.
 Rated voltage: 125 V_{RMS}/V_{DC}
 Breakdown voltage: 500 V_{RMS} for one minute
 Operating temperature: -40°C to +85°C

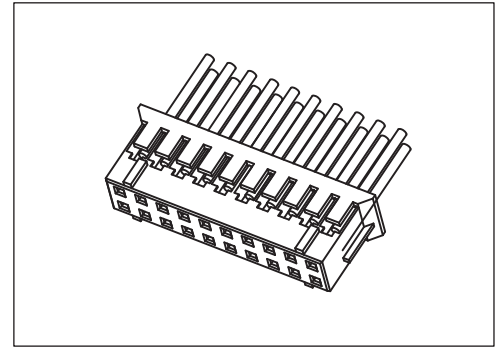


RoHS-compliant

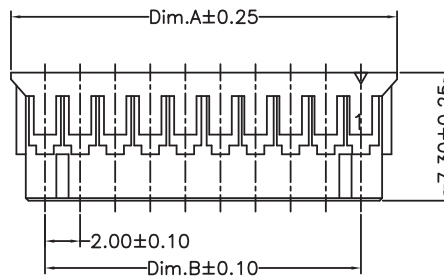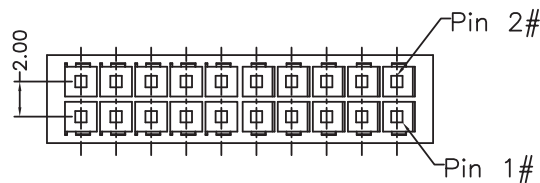

Crimpcontact
 CC2-24/28-TT-RL
 Plating: Tin
 Packsize: 10.000 per Reel

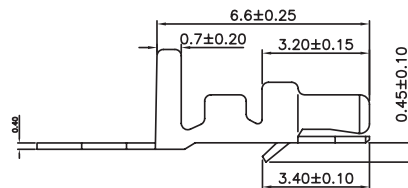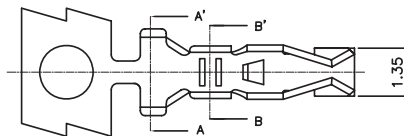

Section:A-A'



Section:B-B'

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
006	8.00	4.00	020	22.00	18.00
008	10.00	6.00	022	24.00	20.00
010	12.00	8.00	024	26.00	22.00
012	14.00	10.00	026	28.00	24.00
014	16.00	12.00	028	30.00	26.00
016	18.00	14.00	030	32.00	28.00
018	20.00	16.00	032	34.00	30.00

BLC22-0730G-~~XXX~~L

XXX = pincount
 (see table)

BLC22-0730G-XXXL