

**SAFETY ISOLATING TRANSFORMER**





POWER : 18VA  
 INPUT VOLTAGE : 2x115V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x9V

NON SHORT CIRCUIT PROOF TRANSFORMER  
 IP00  
 UL94HB  
 OPERATING TEMPERATURE : -25°C to 50°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B

REQUIRED PROTECTION : ON PRIMARY 200mA (115V)  
 100mA (230V)

STANDARDS :  
 UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 CE

CONFORM TO :  
 EN61558-1  
 EN61558-2-6

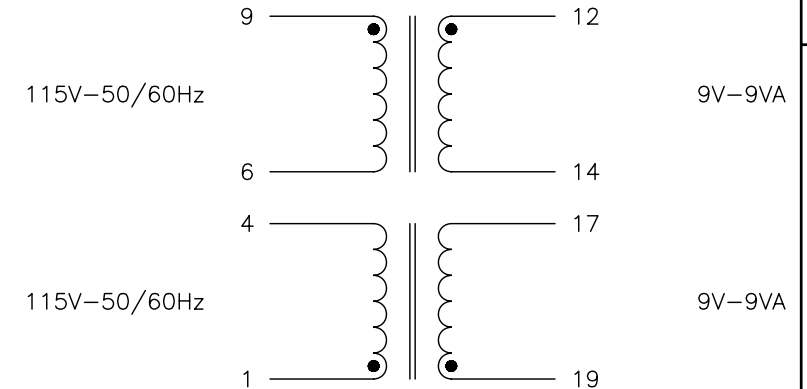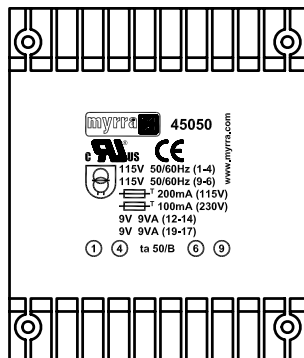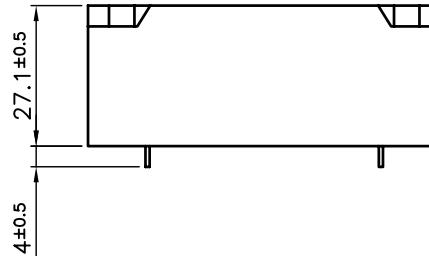

|     |      |              |         |      |
|-----|------|--------------|---------|------|
| Rev | Date | Modification | Dessiné | Visa |
|     |      |              |         |      |
|     |      |              |         |      |
|     |      |              |         |      |
|     |      |              |         |      |

|                         |                  |  |                |
|-------------------------|------------------|--|----------------|
| Finition:               |                  | Tolérance générale:  |                |
| Finition:               |                  | General tolerance:   |                |
| Ech: 1:1                | Matière:         |  |                |
|                         | Material:        |  |                |
| Dessiné par: ROUSSEL.Ch | Date: 20/09/2005 | Visa: J.P.M.   |                |
| <b>DATA SHEET 45050</b> |                  |  |                |
| <b>UI 39x13.5</b>       |                  |  |                |
|                         |                  | 22 Allée du Clos des Charmes<br>Z.A. Les Portes de la Forêt<br>77090 COLLEGIEN<br>Tel : 01-60-37-55-55<br>Fax : 01-60-17-12-00 | <b>DS45050</b> |