



cell type:	NiMH		Conditions
cell size:	AA		
nominal voltage:	1.2	V	at standard charge (0.1C / 20°C)
max. charge voltage:	1.5	V	
capacity			
nominal:	2100	mAh	discharge at 0.2C
minimum:	2100	mAh	discharge at 0.2C
	2000	mAh	discharge at 1C
			1.0V end discharge voltage
			ta: 20°C
max. continuous discharge current:	5000	mA	ta: 0...45°C
charge	current	time	
standard charge:	210	mA	14...16hrs
quick charge:	600	mA	4hrs
fast charge:	2100	mA	1.1hrs
recommended charge termination control parameters:	0...5	mV	- ΔV (-deltaV)
	0.8...1	°C	temperature rise per minute
	45...50	°C	TCO (temperature cut off)
trickle charge current:	10...40	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 200	mA	no conspicuous deformation no leakage
internal resistance: (impedance)	≤ 35	mΩ	at 1KHz battery fully charged
life expectancy:	≥ 500	cycles	acc. IEC standard
self discharge			
charge retention:	≥ 80	%	after 12 months storage at 20°C
initial capacity:	≥ 1400	mAh	within 30 days after delivery discharge at 0.2C
ambient temperature range:	0...45	°C	standard charge
	10...40	°C	fast charge
	0...45	°C	discharge (≥1C)
	- 20...65	°C	discharge (<1C)
	- 20...50	°C	storage (≤3months)
	- 20...40	°C	storage (≤6months)
	- 20...30	°C	storage (≤24months)
QCT1:	20/2050/35		
QCT2:	30/1950/40		

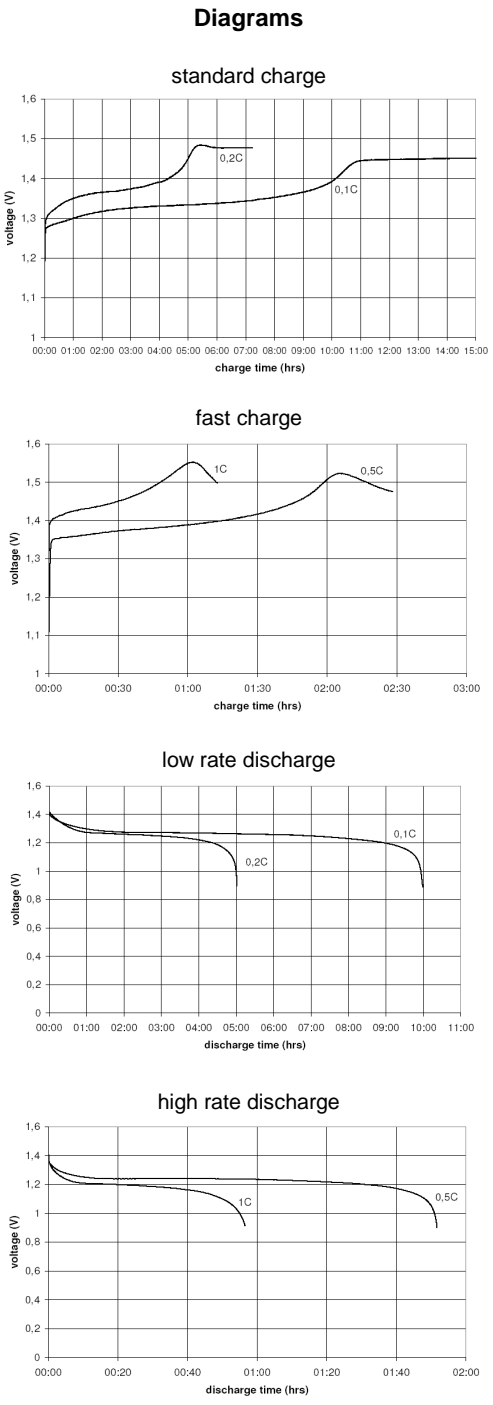

mechanical specifications

cell dimensions

diameter d1:	max.	14.4 - 0.7	mm
diameter d2:	max.	5.5	mm
height h1:	min.	50.5 - 0.5	mm
height h2:	min.	1.2	mm
weight:		28 ± 2	g



	ANSMANN Specifications for model:	AA - 2100mAh low self discharge bulk package
	data sheet no. / part no.	5030991
	supplier no.	702069
	author / date	Gramlich / 14.02.2012