
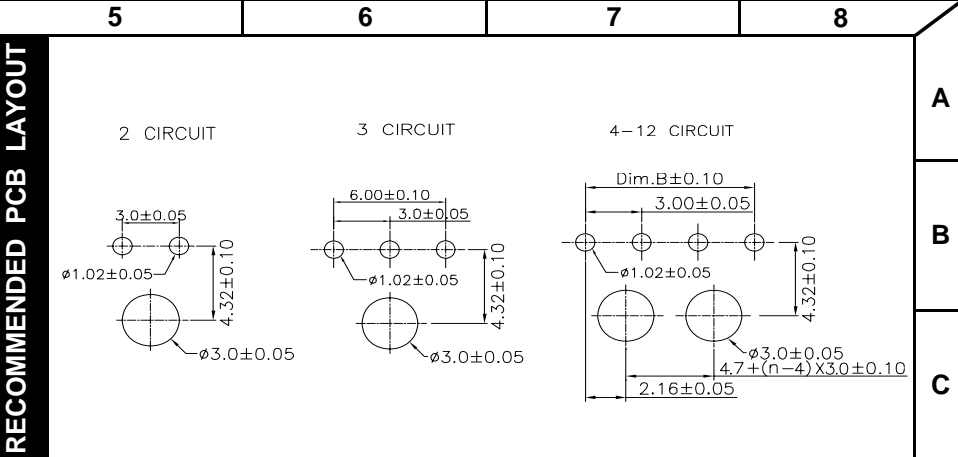


	1	2	3	4
A	01	CONTACT MATERIAL	COPPER ALLOY	
	02	CONTACT PLATING	TIN	
	03	BODY MATERIAL & COLOR	NYLON 46 BLACK	
	04	FLAMMABILITY	UL 94V-0	
	05	INSULATION RESISTANCE	1000 MEG OHM MIN.	
	06	DIELECTRIC STRENGTH	1500 V AC	
	07	CURRENT RATING	5 A	
	08	CONTACT RESISTANCE	10 MILLI OHM MAX.	
	09	OPERATING TEMPERATURE	-25° C - +105° C	

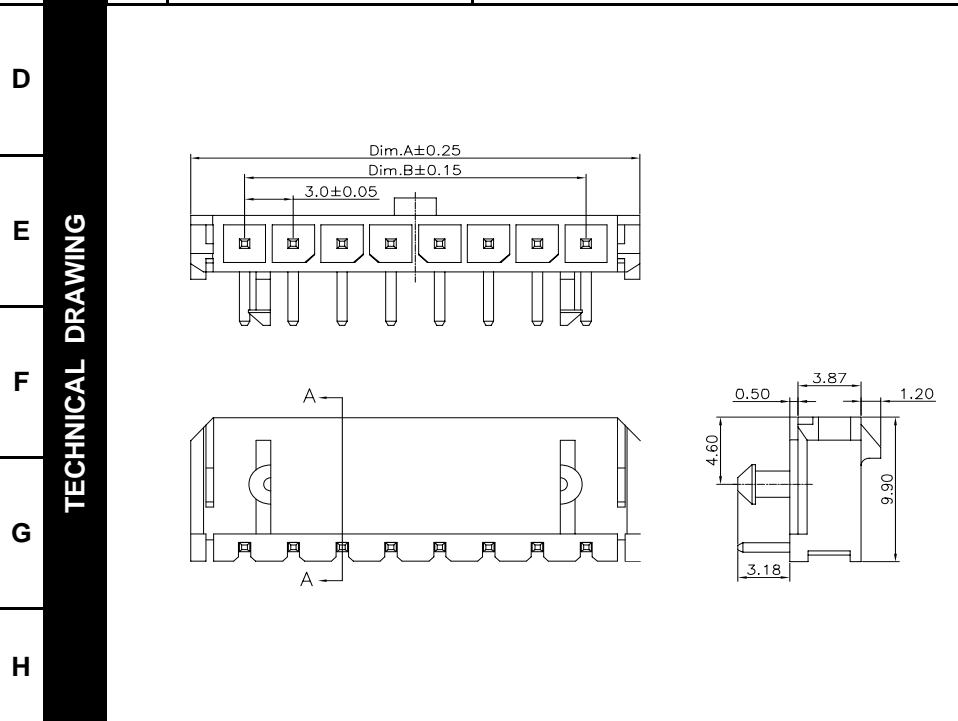

DIMENSIONS

POLES	A	B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

ORDERING CODE

87P301T9A-	SERIES NO.
08-	POLE NO. (AVAILABLE: 06 - 50)
N	LOCATING PEG:
N=	WITH
T	PACKING OPTION:
T=	TUBE
Y-	PLACE PAD:
Y=	WITHOUT
50	PLATING:
50=	TIN

1	2	3	4	5	6	7	8	
		REVISION:	TOPIC:	DATE:	NAME:	UNIT:	PART. NO.:	DESCRIPTION:
		1	FIRST RELEASE	26. Mar. 2008	芮天娜	MM	87P301T9A	MALE HEADER, PITCH 3.0MM, THT, 90°, SINGLE ROW
		2	PEGGY UPDATE	23. Jan. 2009	谭振伟	TOLERANCES (UNLESS OTHERWISE SPECIFIED): n.X ± 0.15 • n.XX ± 0.20		
		3				NO. OF PAGES:	COMPLIANT WITH:	GSM ELECTRONICS PTE LTD © HTTP://WWW.GSM.CN.COM
		4				1 of 1	ROHS	
		5						