

## WP20-6 6Volt 20Ah

### Specifications

Nominal Voltage(V) **6V**

#### Nominal Capacity

20 hour rate	(1A	to	5.25V)	<b>20Ah</b>
10 hour rate	(1.9A	to	5.25V)	<b>19Ah</b>
5 hour rate	(3.4A	to	5.1V)	<b>17Ah</b>
1 C	(20A	to	4.8V)	<b>11.33Ah</b>
3 C	(60A	to	4.8V)	<b>8Ah</b>

Weight **Approx. 3.89kg(8.56Lbs.)**

Internal Resistance (at 1KHz) **Approx. 5 mΩ**

#### Maximum Discharge Current for

5 seconds: **300A**

#### Charging Methods at 25 (77 )

##### Cycle use:

Charging Voltage **7.20 to 7.50V**

Coefficient -5.0mV/ /cell

Maximum Charging Current : **6A**

##### Standby use:

Float Charging Voltage **6.75 to 6.90V**

Coefficient -3.0mV/ /cell

#### Operating Temperature Range

Charge **-15 (5 ) to 40 (104 )**

Discharge **-15 (5 ) to 50 (122 )**

Storage **-15 (5 ) to 40 (104 )**

#### Charge Retention (shelf life) at 20 (68 )

1 month **92%**

3 month **90%**

6 month **80%**

Case Material **ABS UL94 HB**



Option: Flammability resistance of (UL94 V-0)

Terminal **F3**




### Dimensions


mm(inch)

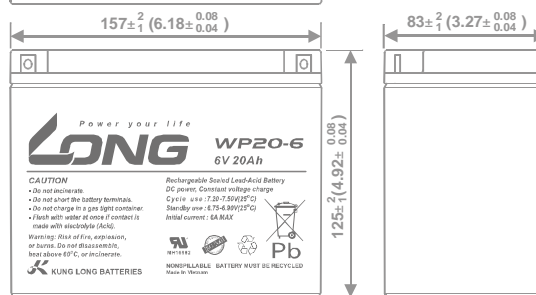


#### Discharge Time VS. Discharge Current (25 )

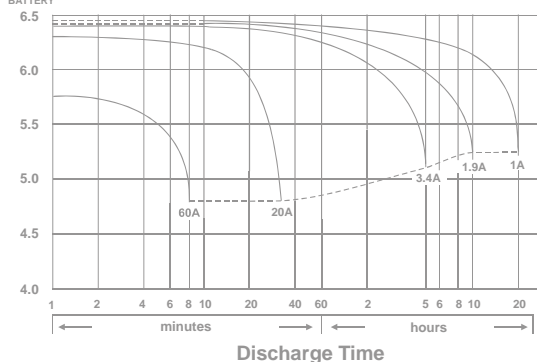


Effect of Temperature on Capacity 25 (77 )

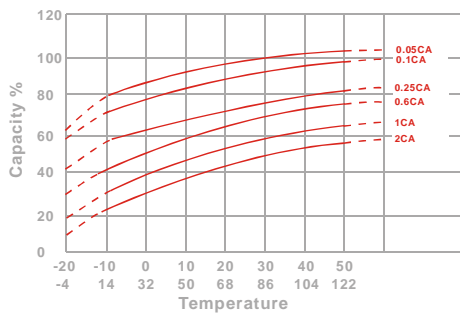


Capacity Retention Characteristic

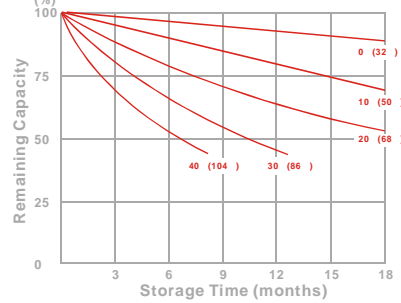

Trickle (or float) Service Life



Cycle Service Life

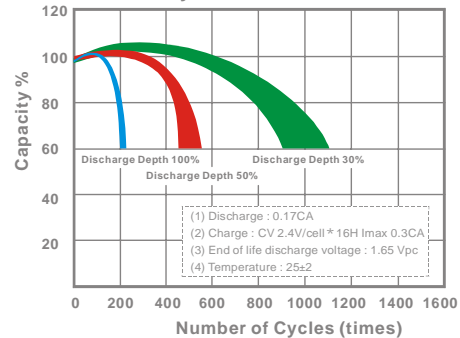

## - PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77 )

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	110	128	139	146	148	150	152
10	min	78.7	88.8	96.2	101	102	103	105
15	min	68.2	75.5	80.4	83.5	84.3	85.2	85.9
30	min	35.5	37.9	40.6	42.2	42.7	43.1	43.6
60	min	22.2	23.2	24.0	24.7	24.8	25.2	25.5
120	min	12.2	12.7	13.0	13.5	13.6	13.7	13.8
180	min	9.53	9.88	10.1	10.3	10.4	10.5	10.6
240	min	7.63	7.93	8.12	8.27	8.32	8.38	8.46
300	min	6.65	6.87	7.00	7.10	7.13	7.18	7.24
600	min	3.87	3.98	4.07	4.13	4.15	4.19	4.22
1200	min	2.05	2.12	2.17	2.20	2.22	2.23	2.25

- Discharge Rates in Amperes to Various End Voltages at 25 (77 )

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	69.6	75.4	79.1	82.3	83.7	85.1	87.6
10	min	46.7	49.9	52.4	54.6	55.5	56.5	58.2
15	min	35.4	38.1	39.8	41.3	41.9	42.6	43.5
30	min	18.9	20.4	21.5	22.4	22.7	23.1	23.6
60	min	11.1	11.7	12.2	12.6	12.7	12.9	13.1
120	min	6.25	6.47	6.61	6.73	6.77	6.82	6.89
180	min	4.73	4.90	5.00	5.08	5.11	5.15	5.21
240	min	3.88	3.97	4.04	4.09	4.11	4.14	4.17
300	min	3.41	3.48	3.53	3.57	3.58	3.60	3.62
600	min	1.97	2.00	2.02	2.04	2.05	2.06	2.07
1200	min	1.00	1.03	1.05	1.07	1.08	1.09	1.10

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%), 10min X < 60min(+8%~-8%), X 60min(+5%~-5%)

021216-1E



Head Quarter Service -  
USA Customer Service -  
Vietnam Customer Service -

TEL: +886-49-2254-777  
TEL: +1-949-328-7936  
TEL: +84-72-3779666

FAX: +886-49-2255-139  
FAX: +1-949-266-9917  
FAX: +84-72-3779476

E-mail: sales@mail.klb.com.tw  
E-mail: sales@kunglong.com  
E-mail: sales@mail.klb.com.tw