



**SMD SLR Series Surface Mount PTC Devices**

## SMD SLR Series Surface Mount PTC Devices

### Description


The SLR series utilizes new conductive filler to achieve super low resistance and maintain thin device profile. This series is available from 0402 to 2920 size with current rating of 0.10A to 9.00A, and is suitable for applications where space or height is at a premium and resettable protection is desired.

### Features





- Super low resistance
- High current rating at lower profile
- RoHS compliant and lead-free
- Halogen-free
- Compact design saves board space
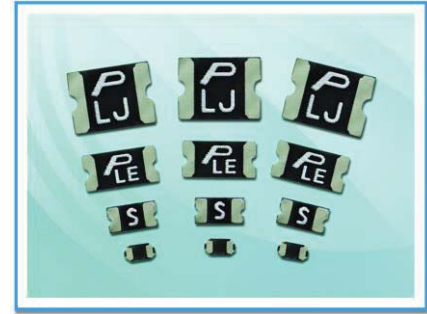
### Applications



- Battery PCM
- Mobile Internet Device (MID)
- Mobile phones and PDAs
- USB peripherals



### Agency Approval and Environmental Compliance



Agency	File Number	Regulation	Standard
	E201431		2011/65/EU
	R50099121		IEC 61249-2-21:2003

### Electrical Characteristics

Part Number	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	P <sub>d typ</sub> (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec.)	R <sub>min</sub> (Ω)	R <sub>1max</sub> (Ω)		
SMD0402P010SLR	0.10	0.30	6	40	0.5	0.50	1.00	0.150	2.000	✓	✓
SMD0402P020SLR	0.20	0.50	6	40	0.5	1.00	1.00	0.100	1.250	✓	✓
SMD0402P035SLR	0.35	0.70	6	40	0.5	8.00	0.10	0.050	0.700	✓	✓
SMD0402P050SLR	0.50	1.00	6	40	0.5	8.00	0.10	0.040	0.400	✓	✓
SMD0402P075SLR	0.75	1.50	6	40	0.5	8.00	0.10	0.030	0.300	✓	✓
SMD0603P050SLR	0.50	1.00	6	50	0.6	8.00	0.10	0.070	0.350	✓	✓
SMD0603P075SLR	0.75	1.50	6	50	0.6	8.00	0.20	0.020	0.165	✓	✓
SMD0603P100SLR	1.00	1.80	6	50	0.6	8.00	0.30	0.020	0.120	✓	✓
SMD0603P150SLR	1.50	3.00	6	50	0.6	8.00	0.50	0.007	0.080	✓	✓
SMD0603P175SLR	1.75	3.50	6	50	0.6	8.00	0.60	0.005	0.060	✓	✓
SMD0603P200SLR	2.00	4.00	6	50	0.6	8.00	1.00	0.005	0.040	✓	✓
SMD0603P300SLR	3.00	6.00	6	50	0.6	8.00	5.00	0.003	0.030	✓	✓
SMD0805P075SLR	0.75	1.50	6	50	0.6	8.00	0.20	0.040	0.150	✓	✓
SMD0805P110SLR	1.10	1.80	6	50	0.6	8.00	0.30	0.030	0.120	✓	✓
SMD0805P150SLR	1.50	3.00	6	50	0.6	8.00	0.50	0.015	0.065	✓	✓
SMD0805P150SLR/12	1.50	3.00	12	50	0.6	8.00	0.50	0.007	0.080	✓	✓
SMD0805P200SLRT	2.00	4.00	6	50	0.6	8.00	1.00	0.005	0.045	✓	✓
SMD0805P260SLRT	2.60	5.20	6	50	0.6	8.00	4.00	0.003	0.035	✓	✓
SMD0805P300SLRT	3.00	6.00	6	50	0.6	8.00	5.00	0.003	0.030	✓	✓
SMD0805P350SLR	3.50	7.00	6	50	0.6	8.00	5.00	0.003	0.025	✓	✓



## SMD SLR Series Surface Mount PTC Devices

### Electrical Characteristics

Part Number	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	P <sub>d typ</sub> (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec.)	R <sub>min</sub> (Ω)	R <sub>1max</sub> (Ω)		
SMD0805P380SLR	3.80	8.00	6	50	0.6	8.00	5.00	0.003	0.020	✓	✓
SMD0805P400SLR	4.00	9.00	6	50	0.6	20.00	2.00	0.003	0.018	✓	✓
SMD1206P075SLR	0.75	1.50	6	50	0.8	8.00	0.30	0.017	0.180	✓	✓
SMD1206P110SLR	1.10	2.20	6	50	0.8	8.00	0.30	0.015	0.100	✓	✓
SMD1206P110SLR/12	1.10	2.20	12	50	0.8	8.00	0.30	0.015	0.130	✓	✓
SMD1206P150SLR	1.50	3.00	6	50	0.8	8.00	0.30	0.010	0.055	✓	✓
SMD1206P150SLR/12	1.50	3.00	12	50	0.8	8.00	0.50	0.010	0.080	✓	✓
SMD1206P200SLR	2.00	4.00	6	50	0.8	8.00	0.50	0.005	0.025	✓	✓
SMD1206P200SLR/12	2.00	4.00	12	50	0.8	8.00	2.00	0.005	0.070	✓	✓
SMD1206P260SLRT	2.60	5.00	6	50	0.8	8.00	4.00	0.003	0.026	✓	✓
SMD1206P260SLR/12	2.60	5.00	12	50	0.8	8.00	4.00	0.003	0.055	✓	✓
SMD1206P300SLRT	3.00	6.00	6	50	0.8	8.00	4.00	0.003	0.020	✓	✓
SMD1206P300SLR/12	3.00	6.00	12	50	0.8	8.00	4.00	0.003	0.030	✓	✓
SMD1206P350SLRT	3.50	7.00	6	50	0.8	8.00	5.00	0.003	0.018	✓	✓
SMD1206P350SLR/12	3.50	7.00	12	50	0.8	8.00	5.00	0.003	0.020	✓	✓
SMD1206P400SLR	4.00	8.00	6	50	0.8	20.00	2.00	0.001	0.016	✓	✓
SMD1206P400SLR/12	4.00	8.00	12	50	0.8	20.00	2.00	0.003	0.016	✓	✓
SMD1206P450SLR	4.50	9.00	6	50	0.8	22.50	2.00	0.001	0.014	✓	✓
SMD1206P450SLR/12	4.50	9.00	12	50	1.0	22.50	2.00	0.003	0.014	✓	✓
SMD1206P500SLR	5.00	10.00	6	50	1.0	25.00	2.00	0.001	0.012	✓	✓
SMD1206P500SLR/12	5.00	10.00	12	50	1.0	25.00	2.00	0.001	0.012	✓	✓
SMD1206P600SLR	6.00	12.00	6	50	1.0	30.00	2.00	0.001	0.010	✓	✓
SMD1206P700SLR	7.00	14.00	6	50	1.2	35.00	2.00	0.001	0.007	✓	✓
SMD1210P200SLR	2.00	4.00	6	50	0.8	8.00	3.00	0.005	0.020	✓	✓
SMD1210P300SLR	3.00	6.00	6	50	0.8	15.00	2.00	0.003	0.020	✓	✓
SMD1210P350SLR	3.50	7.00	6	50	0.8	17.50	2.00	0.003	0.018	✓	✓
SMD1210P350SLR/12	3.50	7.00	12	50	0.8	8.00	5.00	0.002	0.018	✓	✓
SMD1210P400SLR	4.00	8.00	6	50	1.0	20.00	2.00	0.001	0.014	✓	✓
SMD1210P450SLR	4.50	9.00	6	50	1.0	22.50	2.00	0.001	0.014	✓	✓
SMD1210P500SLR	5.00	10.00	6	50	1.2	25.00	2.00	0.001	0.012	✓	✓
SMD1210P500SLR/12	5.00	10.00	12	50	1.2	25.00	2.00	0.001	0.012	✓	✓
SMD1210P550SLR	5.50	11.00	6	50	1.2	27.50	2.00	0.001	0.011	✓	✓
SMD1210P600SLR	6.00	12.00	6	50	1.2	30.00	2.00	0.001	0.010	✓	✓
SMD1210P650SLR	6.50	13.00	6	50	1.2	32.50	2.00	0.001	0.009	✓	✓
SMD1210P700SLR	7.00	14.00	6	50	1.2	35.00	2.00	0.001	0.008	✓	✓
SMD1210P750SLR	7.50	15.00	6	50	1.2	37.50	2.00	0.001	0.007	✓	✓
SMD1210P900SLR	9.00	18.00	6	50	1.4	45.00	2.00	0.001	0.0055	✓	✓
SMD1812P260SLR	2.60	6.00	6	50	1.0	13.00	2.00	0.003	0.024	✓	✓
SMD1812P300SLR/24	3.00	6.00	24	50	2.0	15.00	2.00	0.001	0.030	✓	—
SMD1812P750SLR/12	7.50	15.00	12	50	1.5	37.50	2.00	0.001	0.006	✓	—
SMD2920P500SLR/24	5.00	10.00	24	50	2.2	25.00	2.00	0.001	0.018	✓	✓

## SMD SLR Series Surface Mount PTC Devices

### Electrical Characteristics

Part Number	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	P <sub>d typ</sub> (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec.)	R <sub>min</sub> (Ω)	R <sub>1max</sub> (Ω)		
SMD2920P600SLR/24	6.00	12.00	24	50	2.5	30.00	2.00	0.001	0.012	✓	—
SMD2920P700SLR	7.00	14.00	6	50	2.2	35.00	2.00	0.001	0.007	✓	✓
SMD2920P700SLR/24	7.00	14.00	24	50	2.5	35.00	2.00	0.001	0.010	✓	—

### Note on Electrical Characteristics

#### ■ Vocabulary

- I<sub>hold</sub> = Hold current: maximum current device will pass without tripping in 23°C still air.
- I<sub>trip</sub> = Trip current: minimum current at which the device will trip in 23 °C still air.
- V<sub>max</sub> = Maximum voltage device can withstand without damage at rated current (I<sub>max</sub>)
- I<sub>max</sub> = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>)
- P<sub>d typ</sub> = Typical power dissipated from device when in the tripped state at 23 °C still air.
- R<sub>min</sub> = Minimum resistance of device in initial (un-soldered) state.
- R<sub>1max</sub> = Maximum resistance of device at 23 °C measured one hour after tripping or reflow soldering of 260 °C for 20 sec.

- Value is determined by the specified PWB.
- Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.
- Specifications are subject to change without notice.

### Polymeric PTC Selecting Guide

#### ■ Determine the following operating parameters for the circuits:

- Normal operating current (I<sub>hold</sub>)
- Maximum interrupt current (I<sub>max</sub>)
- Maximum circuit voltage (V<sub>max</sub>)
- Normal operating temperature surrounding device (min°C/max°C)

#### ■ Select the device form factor and dimension suitable for the application:

- Surface Mount Device (SMD)
- Axial Leaded Device (ALD)
- Radial Leaded Device (RLD)
- DISC Device
- Other Customized Form Factors

#### ■ Compare the maximum rating for V<sub>max</sub> and I<sub>max</sub> of the PPTC device with the circuit in application and make sure the circuit's requirement does not exceed the device rating.

#### ■ Check that PPTC device's trip time (time-to-trip) will protect the circuit.

- Verify that the circuit operating temperature is within the PPTC device's normal operating temperature range.
- Verify the performance and suitability of the chosen PPTC device in the application.

## ⚠ WARNING

#### ■ Mechanical Stress

- PPTC devices will undergo a thermal expansion during fault condition. If PPTC devices are installed or placed in an application where the space between PPTC devices and the surrounding materials (e.g., covering materials, packaging materials, encapsulate materials and the like) is insufficient, it will cause an inhibiting effect upon the thermal expansion. Pressing, twisting, bending and other kinds of mechanical stress will also adversely affect the performance of the PPTC devices, and shall not be used or applied.

#### ■ Chemical Pollutants

- Silicone-based oils, oils, solvents, gels, electrolytes, fuels, acids, and the like will adversely affect the properties of PPTC devices, and shall not be used or applied.

#### ■ Electronic and Thermal Effect

- PPTC devices are secondary protection devices and are used solely for sporadic, accidental over-current or over-temperature error condition, and shall NOT be used if or when constant or repeated fault conditions (such fault conditions may be caused by, among others, incorrect pin-connection of a connector) or over-extensive trip events may occur.
- PPTC devices are different from fuses and, when a fault condition occurs, will go into high-resistance state and do not open circuit, in which case the voltage at such PPTC devices may reach a hazardous level.
- Operation over the maximum rating or other forms of improper use may cause failure, arcing, flame and/or other damage to the PPTC devices.
- Conductive material contamination, such as metal particle, may induce shortage, flame or arcing.


## SMD SLR Series Surface Mount PTC Devices

- Due to the inductance, the operation circuits may generate a circuit voltage (Ldi/dt) above the rated voltage of PPTC devices, which shall not be used under such circumstances.

### ■ General

- Customers shall evaluate and test the properties of PPTC devices independently to verify and ensure that their individual applications will be met.
- The performance of PPTC devices will be adversely affected if they are improperly used under electronic, thermal and/or mechanical procedures and/or conditions non-conformant to those recommended by manufacturer.
- Customers shall be responsible for determining whether it is necessary to have back-up, failsafe and/or fool-proof protection to avoid or minimize damage that may result from extra-ordinary, irregular function or failure of PPTC devices.
- Any and all responsibilities and liabilities are disclaimed if any item under this notice of warning is not complied with.
- Polytronics shall not be liable for any claims or damages arising out of products used in automotive applications, unless otherwise agreed by Polytronics.

### Thermal Derating Curve

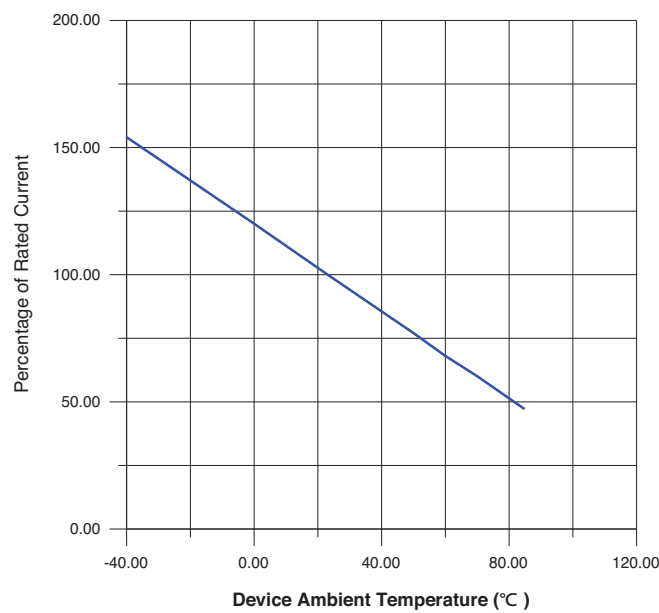

### Thermal Derating Chart

#### Recommended Hold Current (A) at Ambient Temperature (°C)

Part Number	Ambient Operation Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SMD0402P010SLR	0.14	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.05
SMD0402P020SLR	0.29	0.26	0.23	0.20	0.18	0.16	0.15	0.13	0.09
SMD0402P035SLR	0.50	0.45	0.40	0.35	0.31	0.28	0.26	0.22	0.16
SMD0402P050SLR	0.71	0.64	0.57	0.50	0.44	0.40	0.37	0.31	0.23
SMD0402P075SLR	1.05	0.95	0.85	0.75	0.65	0.60	0.55	0.45	0.30
SMD0603P050SLR	0.81	0.71	0.62	0.50	0.41	0.36	0.30	0.24	0.16
SMD0603P075SLR	1.23	1.08	0.94	0.75	0.61	0.53	0.45	0.36	0.23
SMD0603P100SLR	1.35	1.25	1.10	1.00	0.82	0.74	0.65	0.52	0.35
SMD0603P150SLR	2.40	2.10	1.80	1.50	1.25	1.10	0.95	0.80	0.50
SMD0603P175SLR	2.50	2.25	2.00	1.75	1.55	1.40	1.30	1.10	0.80
SMD0603P200SLR	2.85	2.55	2.25	2.00	1.75	1.60	1.40	1.20	0.85

## SMD SLR Series Surface Mount PTC Devices

Recommended Hold Current (A) at Ambient Temperature (°C)

Part Number	Ambient Operation Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SMD0603P300SLR	4.70	4.15	3.60	3.00	2.50	2.20	2.00	1.65	1.20
SMD0805P075SLR	1.15	1.00	0.85	0.75	0.55	0.45	0.40	0.30	0.20
SMD0805P110SLR	1.70	1.50	1.30	1.10	0.85	0.70	0.60	0.50	0.30
SMD0805P150SLR	2.25	2.00	1.75	1.50	1.15	1.00	0.85	0.65	0.45
SMD0805P150SLR/12	2.10	1.90	1.70	1.50	1.30	1.15	1.00	0.85	0.60
SMD0805P200SLRT	3.10	2.75	2.40	2.00	1.65	1.40	1.15	0.95	0.65
SMD0805P260SLRT	3.80	3.30	2.90	2.60	2.20	1.95	1.75	1.50	1.05
SMD0805P300SLRT	4.35	3.80	3.40	3.00	2.50	2.25	2.00	1.70	1.20
SMD0805P350SLR	5.45	4.80	4.20	3.50	2.90	2.55	2.30	1.90	1.40
SMD0805P380SLR	5.90	5.20	4.55	3.80	3.10	2.75	2.45	2.05	1.50
SMD0805P400SLR	5.80	5.20	4.60	4.00	3.40	3.20	3.00	2.60	2.20
SMD1206P075SLR	1.10	0.95	0.85	0.75	0.55	0.50	0.40	0.35	0.25
SMD1206P110SLR	1.65	1.45	1.30	1.10	0.85	0.75	0.65	0.55	0.40
SMD1206P110SLR/12	1.65	1.45	1.30	1.10	0.85	0.75	0.65	0.55	0.40
SMD1206P150SLR	2.25	1.95	1.75	1.50	1.15	1.00	0.85	0.75	0.50
SMD1206P150SLR/12	2.25	2.00	1.80	1.50	1.20	1.05	0.90	0.75	0.55
SMD1206P200SLR	2.95	2.80	2.30	2.00	1.55	1.38	1.20	1.00	0.70
SMD1206P200SLR/12	3.00	2.65	2.40	2.00	1.60	1.40	1.20	1.00	0.70
SMD1206P260SLRT	4.05	3.60	3.12	2.60	2.15	1.90	1.70	1.40	1.00
SMD1206P260SLR/12	3.90	3.45	3.10	2.60	2.05	1.80	1.55	1.30	0.95
SMD1206P300SLRT	4.70	4.15	3.60	3.00	2.50	2.20	2.00	1.65	1.20
SMD1206P300SLR/12	4.70	4.15	3.60	3.00	2.50	2.20	2.00	1.65	1.20
SMD1206P350SLRT	5.50	4.85	4.15	3.50	2.85	2.55	2.25	1.90	1.40
SMD1206P350SLR/12	5.25	4.65	4.20	3.50	2.80	2.45	2.10	1.75	1.25
SMD1206P400SLR	5.75	5.25	4.65	4.00	3.40	3.05	2.75	2.40	1.65
SMD1206P400SLR/12	6.00	5.30	4.80	4.00	3.20	2.80	2.40	2.00	1.40
SMD1206P450SLR	6.50	5.95	5.25	4.50	3.85	3.45	3.10	2.70	1.90
SMD1206P450SLR/12	6.75	5.95	5.40	4.50	3.60	3.15	2.70	2.25	1.60
SMD1206P500SLR	7.20	6.60	5.80	5.00	4.25	3.80	3.40	3.00	2.10
SMD1206P500SLR/12	7.20	6.60	5.80	5.00	4.25	3.80	3.40	3.00	2.10
SMD1206P600SLR	8.65	7.80	7.00	6.00	5.30	4.80	4.50	4.05	3.40
SMD1206P700SLR	9.50	8.65	7.80	7.00	5.95	5.45	5.05	4.45	3.90
SMD1210P200SLR	3.30	2.80	2.40	2.00	1.90	1.75	1.60	1.40	1.00
SMD1210P300SLR	4.70	4.15	3.60	3.00	2.50	2.20	1.90	1.70	1.20
SMD1210P350SLR	5.00	4.60	4.05	3.50	2.80	2.40	2.00	1.75	1.20
SMD1210P350SLR/12	5.00	4.60	4.05	3.50	2.90	2.50	2.15	1.80	1.30
SMD1210P400SLR	5.70	5.20	4.60	4.00	3.40	3.10	2.75	2.30	1.70
SMD1210P450SLR	6.35	5.70	5.15	4.50	3.60	3.30	3.00	2.55	1.90
SMD1210P500SLR	7.20	6.50	5.85	5.00	4.45	4.10	3.75	3.40	2.85
SMD1210P500SLR/12	7.20	6.50	5.75	5.00	4.40	3.95	3.75	3.35	2.75
SMD1210P550SLR	7.75	6.90	6.25	5.50	4.65	4.15	3.60	3.00	2.30




## SMD SLR Series Surface Mount PTC Devices

Recommended Hold Current (A) at Ambient Temperature (°C)

Part Number	Ambient Operation Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SMD1210P600SLR	8.45	7.55	6.80	6.00	5.10	4.55	3.95	3.35	2.50
SMD1210P650SLR	9.15	8.15	7.40	6.50	5.50	4.90	4.25	3.60	2.70
SMD1210P700SLR	9.85	8.80	7.95	7.00	5.95	5.30	4.60	3.90	2.90
SMD1210P750SLR	10.25	9.15	8.45	7.50	6.75	6.15	5.55	4.70	3.65
SMD1210P900SLR	13.05	11.70	10.40	9.00	8.00	7.35	6.75	6.05	5.00
SMD1812P260SLR	4.00	3.65	2.90	2.60	1.90	1.75	1.60	1.20	0.85
SMD1812P300SLR/24	4.95	4.35	3.75	3.00	2.45	2.15	1.85	1.55	1.05
SMD1812P750SLR/12	10.50	9.50	8.50	7.50	6.60	6.05	5.55	5.00	4.20
SMD2920P500SLR/24	8.20	7.25	6.25	5.00	4.25	3.75	3.25	2.80	2.05
SMD2920P600SLR/24	10.15	8.90	7.65	6.00	5.15	4.50	3.90	3.25	2.35
SMD2920P700SLR	10.00	9.20	8.10	7.00	5.60	4.80	4.00	3.50	2.40
SMD2920P700SLR/24	11.52	10.08	8.65	7.00	5.78	5.06	4.35	3.63	2.55

## SMD SLR Series Surface Mount PTC Devices

### Soldering Parameters

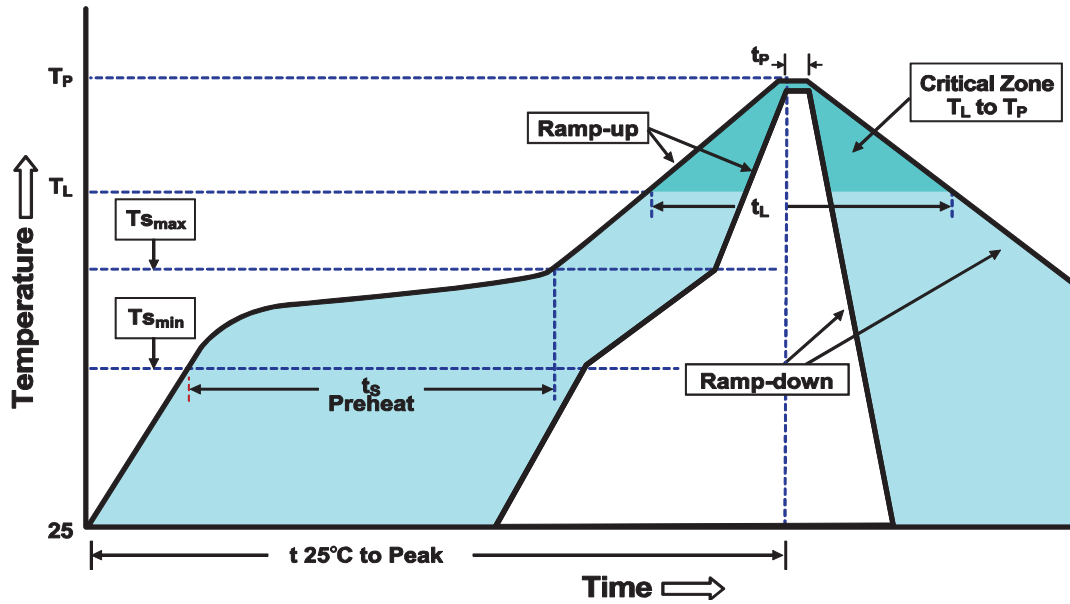

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate ( $T_{s_{max}}$ to $T_P$ )	3°C/second max.
Preheat	
-Temperature Min ( $T_{s_{min}}$ )	150°C
-Temperature Max ( $T_{s_{max}}$ )	200°C
-Time ( $T_{s_{min}}$ to $T_{s_{max}}$ )	60-180 seconds
Time maintained above:	
-Temperature ( $T_L$ )	217°C
-Time ( $t_L$ )	60-150 seconds
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	20-40 seconds
Ramp-Down Rate	6 °C /second max.
Time 25°C to Peak Temperature	8 minutes max.
Storage Condition	0°C ~35°C, ≤ 70%RH

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N<sub>2</sub> environment for lead-free
- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Devices can be cleaned using standard industry methods and solvents.


**Note 1:** All temperature refer to topside of the package, measured on the package body surface.

**Note 2:** If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.



## SMD SLR Series Surface Mount PTC Devices


### Physical Dimensions (mm.)

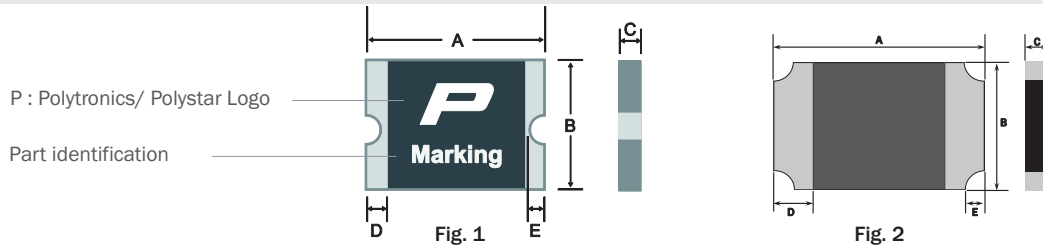

Part Number	A		B		C		D		E		Fig.
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
SMD0402P010SLR	0.85	1.15	0.35	0.65	0.20	0.60	0.10	0.45	-	0.40	2
SMD0402P020SLR	0.85	1.15	0.35	0.65	0.20	0.60	0.10	0.45	-	0.40	2
SMD0402P035SLR	0.85	1.15	0.35	0.65	0.20	0.60	0.10	0.45	-	0.40	2
SMD0402P050SLR	0.85	1.15	0.35	0.65	0.20	0.60	0.10	0.45	-	0.40	2
SMD0402P075SLR	0.85	1.15	0.35	0.65	0.20	0.60	0.10	0.45	-	0.40	2
SMD0603P050SLR	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	-	0.40	1
SMD0603P075SLR	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	-	0.40	1
SMD0603P100SLR	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	-	0.40	1
SMD0603P150SLR	1.40	1.80	0.60	1.00	0.40	0.95	0.15	0.50	-	0.40	1
SMD0603P175SLR	1.40	1.80	0.60	1.00	0.40	0.95	0.15	0.50	-	0.40	1
SMD0603P200SLR	1.40	1.80	0.60	1.00	0.40	0.95	0.15	0.50	-	0.40	1
SMD0603P300SLR	1.40	1.80	0.60	1.00	0.40	0.95	0.15	0.50	-	0.40	1
SMD0805P075SLR	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45	1
SMD0805P110SLR	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45	1
SMD0805P150SLR	2.00	2.20	1.20	1.50	0.40	0.60	0.20	0.55	0.05	0.45	1
SMD0805P150SLR/12	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45	1
SMD0805P200SLRT	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45	1
SMD0805P260SLRT	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45	1
SMD0805P300SLRT	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45	1
SMD0805P350SLR	2.00	2.20	1.20	1.50	0.60	1.40	0.20	0.55	0.05	0.45	1
SMD0805P380SLR	2.00	2.20	1.20	1.50	0.60	1.40	0.20	0.55	0.05	0.45	1
SMD0805P400SLR	2.00	2.20	1.20	1.50	0.60	1.40	0.20	0.55	0.05	0.45	1
SMD1206P075SLR	3.00	3.40	1.50	1.80	0.40	0.70	0.25	0.75	0.05	0.45	1
SMD1206P110SLR	3.00	3.40	1.50	1.80	0.40	0.75	0.25	0.75	0.05	0.45	1
SMD1206P110SLR/12	3.00	3.40	1.50	1.80	0.40	0.70	0.25	0.75	0.05	0.45	1
SMD1206P150SLR	3.00	3.40	1.50	1.80	0.40	0.70	0.25	0.75	0.05	0.45	1
SMD1206P150SLR/12	3.00	3.40	1.50	1.80	0.40	0.75	0.25	0.75	0.05	0.45	1
SMD1206P200SLR	3.00	3.40	1.50	1.80	0.40	0.60	0.25	0.75	0.05	0.45	1
SMD1206P200SLR/12	3.00	3.40	1.50	1.80	0.40	0.75	0.25	0.75	0.05	0.45	1
SMD1206P260SLRT	3.00	3.40	1.50	1.80	0.40	0.70	0.25	0.75	0.05	0.45	1
SMD1206P260SLR/12	3.00	3.40	1.50	1.80	0.40	0.75	0.25	0.75	0.05	0.45	1
SMD1206P300SLRT	3.00	3.40	1.50	1.80	0.40	0.80	0.25	0.75	0.05	0.45	1
SMD1206P300SLR/12	3.00	3.40	1.50	1.80	0.40	0.75	0.25	0.75	0.05	0.45	1
SMD1206P350SLRT	3.00	3.40	1.50	1.80	0.40	0.75	0.25	0.75	0.05	0.45	1

## SMD SLR Series Surface Mount PTC Devices

### Physical Dimensions (mm.)

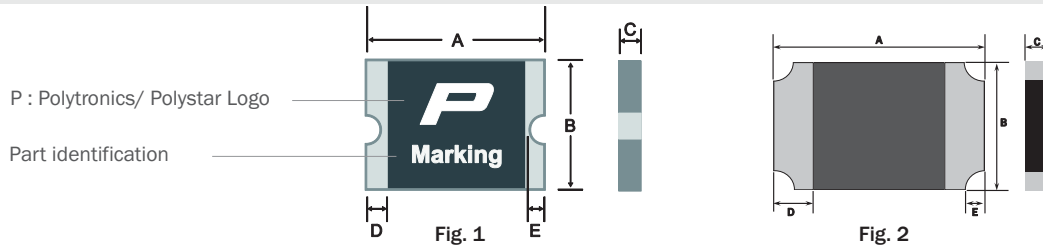

Part Number	A		B		C		D		E		Fig.
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
SMD1206P350SLR/12	3.00	3.40	1.50	1.80	0.50	1.20	0.25	0.75	0.05	0.45	1
SMD1206P400SLR	3.00	3.40	1.50	1.80	0.60	1.00	0.25	0.75	0.05	0.45	1
SMD1206P400SLR/12	3.00	3.40	1.50	1.80	0.50	1.20	0.25	0.75	0.05	0.45	1
SMD1206P450SLR	3.00	3.40	1.50	1.80	0.60	1.00	0.25	0.75	0.05	0.45	1
SMD1206P450SLR/12	3.00	3.40	1.50	1.80	0.50	1.20	0.25	0.75	0.05	0.45	1
SMD1206P500SLR	3.00	3.40	1.50	1.80	0.60	1.00	0.25	0.75	0.05	0.45	1
SMD1206P500SLR/12	3.00	3.40	1.50	1.80	0.80	1.20	0.25	0.75	0.05	0.45	1
SMD1206P600SLR	3.00	3.40	1.50	1.80	0.60	1.00	0.25	0.75	0.05	0.45	1
SMD1206P700SLR	3.00	3.40	1.50	1.80	1.00	1.40	0.25	0.75	0.05	0.45	1
SMD1210P200SLR	3.00	3.43	2.35	2.80	0.40	0.70	0.25	0.75	0.10	0.50	1
SMD1210P300SLR	3.00	3.43	2.35	2.80	0.60	1.20	0.25	0.75	0.10	0.50	1
SMD1210P350SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P350SLR/12	3.00	3.43	2.35	2.80	0.40	0.75	0.25	0.75	0.10	0.50	1
SMD1210P400SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P450SLR	3.00	3.43	2.35	2.80	0.60	1.20	0.25	0.75	0.10	0.50	1
SMD1210P500SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P500SLR/12	3.00	3.43	2.35	2.80	0.80	1.20	0.25	0.75	0.10	0.50	1
SMD1210P550SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P600SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P650SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P700SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P750SLR	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.50	1
SMD1210P900SLR	3.00	3.43	2.35	2.80	1.00	1.40	0.25	0.75	0.10	0.50	1
SMD1812P260SLR	4.37	4.73	3.07	3.41	0.40	0.70	0.30	1.20	0.15	0.65	1
SMD1812P300SLR/24	4.37	4.73	3.07	3.41	1.50	2.50	0.30	1.20	0.15	0.65	1
SMD1812P750SLR/12	4.37	4.73	3.07	3.41	0.60	1.30	0.30	1.20	0.15	0.65	1
SMD2920P500SLR/24	6.73	7.98	4.80	5.44	0.40	1.20	0.30	2.50	0.25	2.00	1
SMD2920P600SLR/24	6.73	7.98	4.80	5.44	1.50	2.50	0.30	2.50	0.25	2.00	1
SMD2920P700SLR	6.73	7.98	4.80	5.44	0.40	0.65	0.30	2.50	0.25	2.00	1
SMD2920P700SLR/24	6.73	7.98	4.80	5.44	1.50	2.50	0.30	2.50	0.25	2.00	1


## SMD SLR Series Surface Mount PTC Devices

### Environmental Specifications

Operating Temperature	-40°C to +85 °C
Maximum Device Surface Temperature in Tripped State	125°C
Thermal Shock	MIL-STD-202 Method 107G +85°C /-40°C 20 times < R1max
Solvent Resistance	MIL-STD-202, Method 215 No change
Vibration	MIL-STD-883C, Method 2007.1, Condition A No change
Moisture Sensitivity Level	Level 1, J-STD-020C

### Packaging Quantity and Marking

Recommended Pad Layout (mm.)

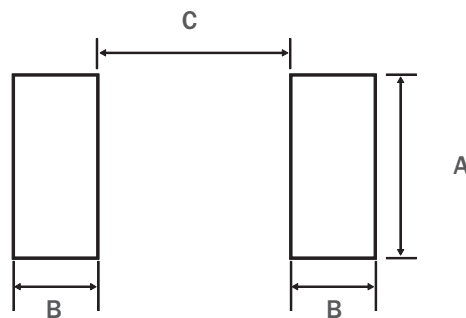

Part Number	Marking	Quantity	Solder Pad		
			A	B	C
SMD0402P010SLR		10000	0.70	0.60	0.40
SMD0402P020SLR		10000	0.70	0.60	0.40
SMD0402P035SLR		10000	0.70	0.60	0.40
SMD0402P050SLR		10000	0.70	0.60	0.40
SMD0402P075SLR		10000	0.70	0.60	0.40
SMD0603P050SLR	K	4000	1.00	1.00	0.80
SMD0603P075SLR	N	4000	1.00	1.00	0.80
SMD0603P100SLR	S	4000	1.00	1.00	0.80
SMD0603P150SLR	T	4000	1.00	1.00	0.80
SMD0603P175SLR	V	4000	1.00	1.00	0.80
SMD0603P200SLR	X	4000	1.00	1.00	0.80
SMD0603P300SLR	Y	4000	1.00	1.00	0.80
SMD0805P075SLR	N	4000	1.50	1.00	1.20
SMD0805P110SLR	1	4000	1.50	1.00	1.20
SMD0805P150SLR	K	4000	1.50	1.00	1.20

## SMD SLR Series Surface Mount PTC Devices

Part Number	Marking	Quantity	Solder Pad		
			A	B	C
SMD0805P150SLR/12	J	4000	1.50	1.00	1.20
SMD0805P200SLRT	L	4000	1.50	1.00	1.20
SMD0805P260SLRT	U	4000	1.50	1.00	1.20
SMD0805P300SLRT	X	4000	1.50	1.00	1.20
SMD0805P350SLR	Y	4000	1.50	1.00	1.20
SMD0805P380SLR	S	3000	1.50	1.00	1.20
SMD0805P400SLR	h	3000	1.50	1.00	1.20
SMD1206P075SLR	L0	4000	1.80	1.00	1.80
SMD1206P110SLR	L1	4000	1.80	1.00	1.80
SMD1206P110SLR/12	C1	4000	1.80	1.00	1.80
SMD1206P150SLR	L5	4000	1.80	1.00	1.80
SMD1206P150SLR/12	C5	4000	1.80	1.00	1.80
SMD1206P200SLR	L2	4000	1.80	1.00	1.80
SMD1206P200SLR/12	C2	4000	1.80	1.00	1.80
SMD1206P260SLRT	L3	4000	1.80	1.00	1.80
SMD1206P260SLR/12	C6	4000	1.80	1.00	1.80
SMD1206P300SLRT	L7	4000	1.80	1.00	1.80
SMD1206P300SLR/12	C7	4000	1.80	1.00	1.80
SMD1206P350SLRT	LC	4000	1.80	1.00	1.80
SMD1206P350SLR/12	CC	3000	1.80	1.00	1.80
SMD1206P400SLR	LE	3000	1.80	1.00	1.80
SMD1206P400SLR/12	CE	3000	1.80	1.00	1.80
SMD1206P450SLR	LF	3000	1.80	1.00	1.80
SMD1206P450SLR/12	CF	3000	1.80	1.00	1.80
SMD1206P500SLR	LK	3000	1.80	1.00	1.80
SMD1206P500SLR/12	CK	3000	1.80	1.00	1.80
SMD1206P600SLR	LN	3000	1.80	1.00	1.80
SMD1206P700SLR	LT	2000	1.80	1.00	1.80
SMD1210P200SLR	L3	4000	2.50	1.00	2.00
SMD1210P300SLR	L7	3000	2.50	1.00	2.00
SMD1210P350SLR	L5	3000	2.50	1.00	2.00
SMD1210P350SLR/12	C5	4000	2.50	1.00	2.00
SMD1210P400SLR	LE	3000	2.50	1.00	2.00
SMD1210P450SLR	LC	3000	2.50	1.00	2.00
SMD1210P500SLR	LK	3000	2.50	1.00	2.00
SMD1210P500SLR/12	CK	3000	2.50	1.00	2.00
SMD1210P550SLR	LF	3000	2.50	1.00	2.00
SMD1210P600SLR	LL	3000	2.50	1.00	2.00
SMD1210P650SLR	LJ	3000	2.50	1.00	2.00
SMD1210P700SLR	LN	3000	2.50	1.00	2.00
SMD1210P750SLR	LS	3000	2.50	1.00	2.00
SMD1210P900SLR	LT	2000	2.50	1.00	2.00
SMD1812P260SLR	L26	2000	3.15	1.78	3.45

## SMD SLR Series Surface Mount PTC Devices

Part Number	Marking	Quantity	Solder Pad		
			A	B	C
SMD1812P300SLR/24	J30	2500	3.15	1.78	3.45
SMD1812P750SLR/12	C75	1000	3.15	1.78	3.45
SMD2920P500SLR/24	J50	1500	5.30	2.00	4.60
SMD2920P600SLR/24	J60	2500	5.30	2.00	4.60
SMD2920P700SLR	L70	2000	5.30	2.00	4.60
SMD2920P700SLR/24	J70	2500	5.30	2.00	4.60



◎ 8 mm tape on 7 inch reel per EIA-481 (equivalent to IEC286, part 3)

### Physical Specifications

<b>Terminal Material</b>	Solder-Plated Copper (Solder Material: Matte Tin (Sn))
<b>Lead Solderability</b>	Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3.

### Tape Specifications: EIA-481 (mm.)

	0402	
	P010SLR P020SLR P035SLR P050SLR	P075SLR P100SLR
W	8.00 ± 0.10	8.00 ± 0.10
F	3.50 ± 0.05	3.50 ± 0.05
E <sub>1</sub>	1.75 ± 0.05	1.75 ± 0.05
D <sub>0</sub>	1.55 ± 0.05	1.55 ± 0.05
D <sub>1</sub>	—	—
P <sub>0</sub>	4.00 ± 0.10	4.00 ± 0.10
P <sub>1</sub>	2.00 ± 0.05	2.00 ± 0.05
P <sub>2</sub>	2.00 ± 0.05	2.00 ± 0.05
A <sub>0</sub>	0.69 ± 0.03	0.74 ± 0.03
B <sub>0</sub>	1.23 ± 0.03	1.28 ± 0.03
T	—	—
K <sub>0</sub>	0.60 ± 0.03	0.60 ± 0.05
Leader min.	390	390
Trailer min.	160	160

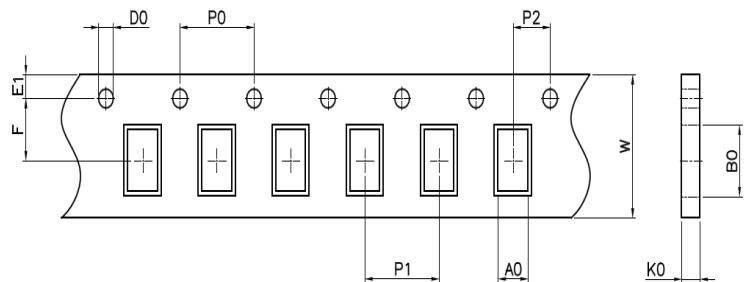

### Reel Dimensions: EIA-481 (mm.)

C	Ø170 ± 3.0
D	Ø60.2 ± 0.5
H	11.0 ± 0.5
W	9.0 ± 1.5

## SMD SLR Series Surface Mount PTC Devices

### Tape Specifications: EIA-481 (mm.)

	0603		0805		
	P075SLR P100SLR	P150SLR P175SLR P200SLR P300SLR	P075SLR P110SLR P150SLR P150SLR/12 P200SLRT P260SLRT P300SLRT	P350SLR	P380SLR P400SLR
W	8.00 ± 0.30	8.00 ± 0.10	8.00 ± 0.10	8.00 ± 0.10	8.00 ± 0.30
F	3.50 ± 0.05	3.50 ± 0.05	3.50 ± 0.05	3.50 ± 0.05	3.50 ± 0.05
E <sub>1</sub>	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10
D <sub>0</sub>	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05
D <sub>1</sub>	0.50 ± 0.10	0.50 ± 0.10	1.00 (min)	1.00 ± 0.10	1.00 ± 0.10
P <sub>0</sub>	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.08	4.00 ± 0.10	4.00 ± 0.10
P <sub>1</sub>	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10
P <sub>2</sub>	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05
A <sub>0</sub>	1.10 ± 0.10	1.10 ± 0.10	1.60 ± 0.10	1.65 ± 0.10	1.65 ± 0.10
B <sub>0</sub>	1.92 ± 0.10	1.92 ± 0.10	2.30 ± 0.10	2.35 ± 0.10	2.35 ± 0.10
T	0.20 ± 0.10	0.20 ± 0.10	0.25 ± 0.10	0.20 ± 0.10	0.25 ± 0.10
K <sub>0</sub>	0.72 ± 0.10	0.96 ± 0.10	0.90 ± 0.10	1.05 ± 0.10	1.50 ± 0.10
Leader min.	390	390	390	390	390
Trailer min.	160	160	160	160	160

### Reel Dimensions: EIA-481 (mm.)

C	Ø178 ± 1.0
D	Ø60.2 ± 0.5
H	11.0 ± 0.5
W	9.0 ± 1.5
Fig.	3

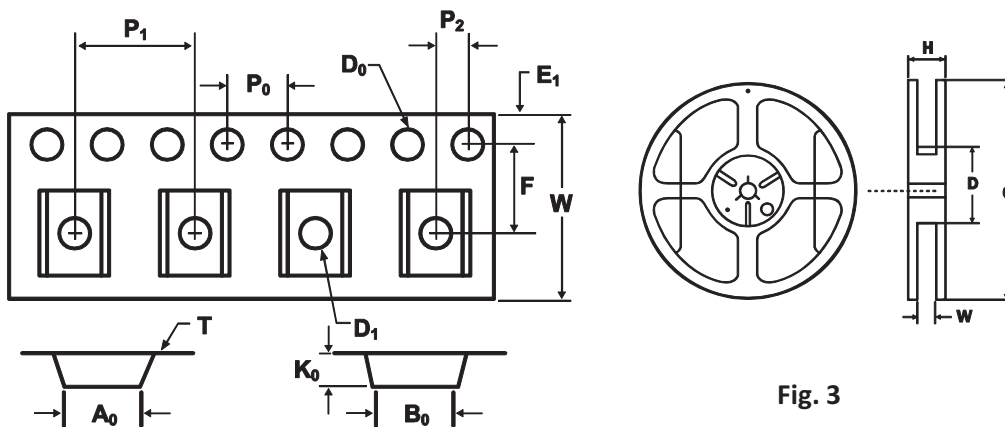


Fig. 3




## SMD SLR Series Surface Mount PTC Devices

Tape Specifications: EIA-481 (mm.)

	1206			1210	
	P075SLR P110SLR, P110SLR/12 P150SLR, P150SLR/12 P200SLR, P200SLR/12 P260SLRT, P260SLR/12 P300SLRT, P300SLR/12 P350SLRT	P350SLR/12 P400SLR, P400SLR/12 P450SLR, P450SLR/12 P500SLR, P500SLR/12 P600SLR	P700SLR	P200SLR P350SLR/12	P300SLR P350SLR P400SLR P450SLR P500SLR, P500SLR/12 P550SLR P600SLR P650SLR P700SLR P750SLR
W	8.20 +0.10/-0.30	8.15 +0.15/-0.30	8.20 +0.15/-0.30	8.00 ± 0.30	8.00 ± 0.30
F	3.50 ± 0.05	3.50 ± 0.05	3.50 ± 0.05	3.50 ± 0.05	3.50 ± 0.05
E <sub>1</sub>	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10
D <sub>0</sub>	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05
D <sub>1</sub>	1.00 ± 0.10	1.00 ± 0.10	1.00 ± 0.10	1.00 (min)	1.00 (min)
P <sub>0</sub>	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10
P <sub>1</sub>	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10
P <sub>2</sub>	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05
A <sub>0</sub>	1.95 ± 0.10	1.92 ± 0.10	1.92 ± 0.10	2.82 ± 0.10	2.82 ± 0.10
B <sub>0</sub>	3.65 ± 0.10	3.65 ± 0.10	3.65 ± 0.10	3.46 ± 0.10	3.50 ± 0.10
T	0.20 ± 0.10	0.25 ± 0.10	0.25 ± 0.10	0.25 ± 0.10	0.20 ± 0.10
K <sub>0</sub>	0.87 ± 0.10	1.30 ± 0.10	1.70 ± 0.10	1.00 ± 0.10	1.30 ± 0.10
Leader min.	390	390	390	390	390
Trailer min.	160	160	160	160	160

Reel Dimensions: EIA-481 (mm.)

C	Ø178 ± 1.0
D	Ø60.2 ± 0.5
H	11.0 ± 0.5
W	9.0 ± 1.5
Fig.	3

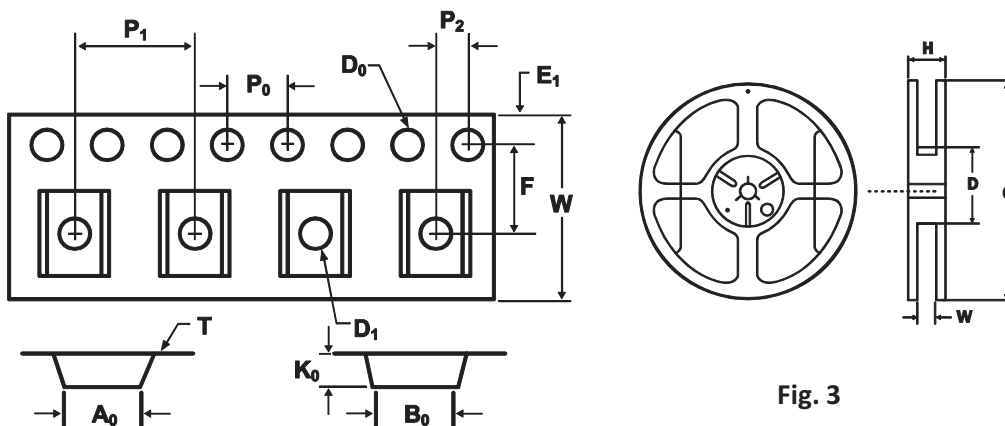

## SMD SLR Series Surface Mount PTC Devices

Tape Specifications: EIA-481 (mm.)

	1210		1812		2920
	P900SLR	P260SLR	P750SLR/12	P300SLR/24	P500SLR/24
W	8.00 ± 0.30	12.00 ± 0.10	12.00 ± 0.10	12.00 ± 0.30	16.00 ± 0.30
F	3.50 ± 0.05	5.50 ± 0.05	5.50 ± 0.05	5.50 ± 0.05	7.50 ± 0.10
E <sub>1</sub>	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10	1.75 ± 0.10
D <sub>0</sub>	1.55 ± 0.05	1.55 ± 0.05	1.55 ± 0.05	1.50 + 0.10 / - 0	1.55 ± 0.05
D <sub>1</sub>	1.00 (min)	1.55 (min)	1.50 (min)	1.50 + 0.10 / - 0	1.50 ± 0.10
P <sub>0</sub>	4.00 ± 0.10	4.00 ± 0.08	4.00 ± 0.08	4.00 ± 0.10	4.00 ± 0.10
P <sub>1</sub>	4.00 ± 0.10	8.00 ± 0.10	8.00 ± 0.10	8.00 ± 0.10	8.00 ± 0.10
P <sub>2</sub>	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.05	2.00 ± 0.10
A <sub>0</sub>	2.80 ± 0.10	3.58 ± 0.10	3.58 ± 0.10	3.55 ± 0.10	5.74 ± 0.10
B <sub>0</sub>	3.50 ± 0.10	4.93 ± 0.10	4.93 ± 0.10	4.88 ± 0.10	8.02 ± 0.10
T	0.25 ± 0.10	0.25 ± 0.10	0.25 ± 0.10	0.30 ± 0.05	0.30 ± 0.10
K <sub>0</sub>	1.60 ± 0.10	0.87 ± 0.06	2.10 ± 0.10	2.45 ± 0.10	1.30 ± 0.10
Leader min.	390	390	390	390	390
Trailer min	160	160	160	160	160

Reel Dimensions: EIA-481 (mm.)

C	Ø178 ± 1.0	Ø178 ± 1.0	Ø178 ± 1.0	Ø330.0 ± 1.0	Ø180 ± 3.0
D	Ø60.2 ± 0.5	Ø60.2 ± 0.5	Ø60.2 ± 0.5	Ø62.5 ± 0.5	Ø60.0 ± 0.5
H	11.0 ± 0.5	16.0 ± 0.5	16.0 ± 0.5	16.5 ± 0.1	19.5 ± 1.0
W	9.0 ± 1.5	13.2 ± 1.5	13.2 ± 1.5	12.5 ± 1.5	17.0 ± 0.2
Fig.	3	3	3	4	3

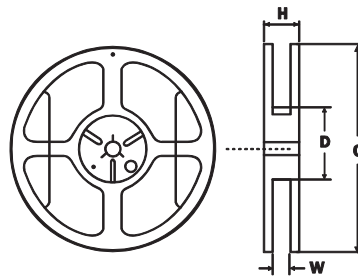
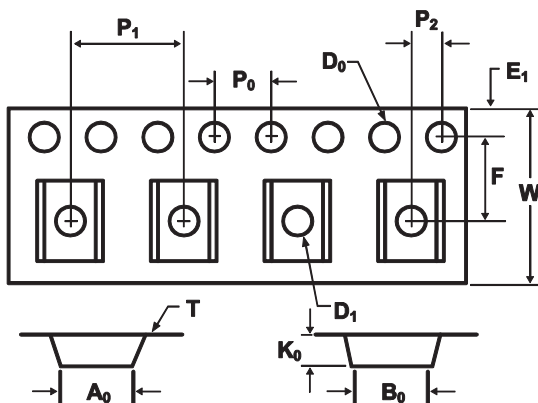


Fig. 3




Fig. 4

## SMD SLR Series Surface Mount PTC Devices

Tape Specifications: EIA-481 (mm.)

2920		
	P700SLR	P600SLR/24 P700SLR/24
W	16.00 ± 0.30	16.00 ± 0.30
F	7.50 ± 0.10	7.50 ± 0.10
E <sub>1</sub>	1.75 ± 0.10	1.75 ± 0.10
D <sub>0</sub>	1.55 ± 0.05	1.50 + 0.10 / - 0
D <sub>1</sub>	1.50 ± 0.10	1.50 (min)
P <sub>0</sub>	4.00 ± 0.10	4.00 ± 0.10
P <sub>1</sub>	8.00 ± 0.10	8.00 ± 0.10
P <sub>2</sub>	2.00 ± 0.10	2.00 ± 0.10
A <sub>0</sub>	5.74 ± 0.10	5.60 ± 0.10
B <sub>0</sub>	8.02 ± 0.10	7.95 ± 0.10
T	0.30 ± 0.10	0.30 ± 0.05
K <sub>0</sub>	0.91 ± 0.10	2.55 ± 0.10
Leader min.	390	390
Trailer min.	160	160
<b>Reel Dimensions: EIA-481 (mm.)</b>		
C	∅180 ± 3.0	∅330.0 ± 1.0
D	∅60.0 ± 0.5	∅100.0 ± 0.5
H	19.5 ± 1.0	22.4 ± 0.1
W	17.0 ± 0.2	16.4 ± 1.5
Fig.	3	4

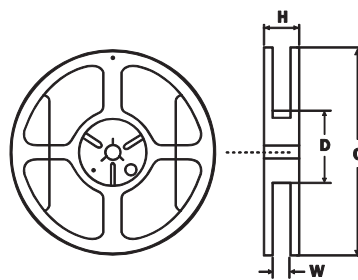
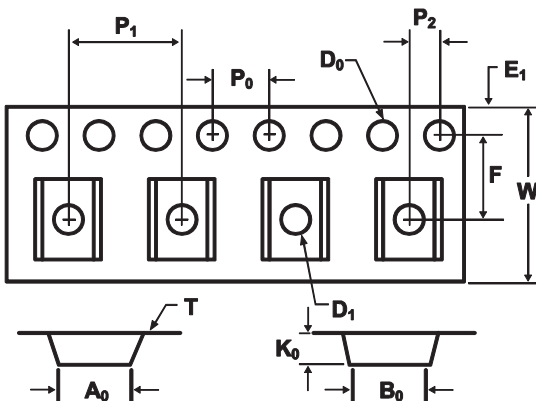


Fig. 3





Fig. 4

## SMD SLR Series Surface Mount PTC Devices

### Part Number System

SMD 1206 P □□□ SLR T / □□

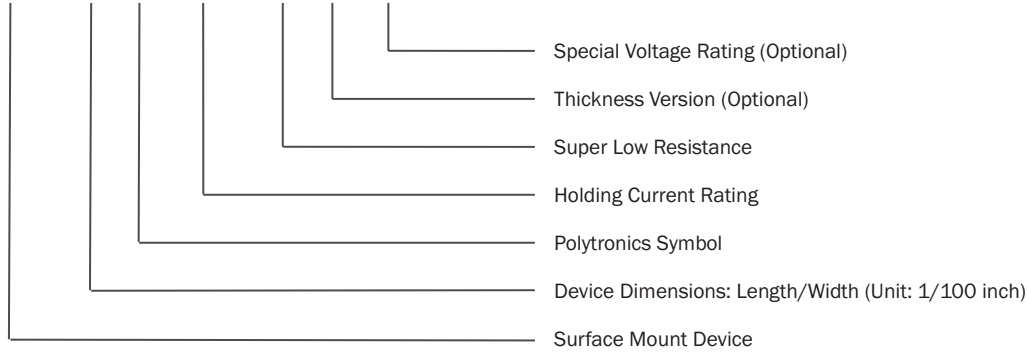

### Cross Reference

Polytronics / EVERFUSE <sup>®</sup>	Cross Reference	
	TE Connectivity / PolySwitch <sup>®</sup>	Bourns / Multifuse <sup>®</sup>
SMD0402P010SLR	--	MF-ASML010/6
SMD0402P020SLR	--	MF-ASML020/6
SMD0402P035SLR	--	MF-ASML035/6
SMD0402P050SLR	--	MF-ASML050/6
SMD0402P075SLR	--	--
SMD0402P100SLR	--	--
SMD0603P050SLR	--	MF-FSML050/8
SMD0603P075SLR	--	MF-FSML075/8
SMD0603P100SLR	--	MF-FSML100/8
SMD0603P150SLR	--	MF-FSML150/8
SMD0603P175SLR	--	MF-FSML175/8
SMD0603P200SLR	--	MF-FSML200/6
SMD0603P300SLR	--	MF-FSML300/6
SMD0805P075SLR	--	--
SMD0805P110SLR	--	MF-PSML110
SMD0805P150SLR	--	MF-PSML150
SMD0805P150SLR/12	--	--
SMD0805P200SLRT	--	MF-PSML200
SMD0805P260SLRT	--	MF-PSML260
SMD0805P300SLRT	--	MF-PSML300
SMD0805P350SLR	--	MF-PSML350
SMD0805P380SLR	--	--
SMD0805P400SLR	--	--
SMD1206P075SLR	--	--
SMD1206P110SLR	--	--
SMD1206P150SLR	--	MF-NSML150
SMD1206P150SLR/12	--	--
SMD1206P200SLR	nanoSMD200LR	MF-NSML200
SMD1206P200SLR/12	--	--
SMD1206P260SLRT	--	MF-NSML260
SMD1206P260SLR/12	--	--
SMD1206P300SLRT	--	MF-NSML300

## SMD SLR Series Surface Mount PTC Devices

### Cross Reference

Polytronics / EVERFUSE <sup>®</sup>	Cross Reference	
	TE Connectivity / PolySwitch <sup>®</sup>	Bourns / Multifuse <sup>®</sup>
SMD1206P300SLR/12	--	--
SMD1206P350SLRT	nanoSMD350LR	MF-NSML350
SMD1206P350SLR/12	--	--
SMD1206P400SLR	nanoSMD400LR	MF-NSML400
SMD1206P400SLR/12	--	--
SMD1206P450SLR	nanoSMD450LR	MF-NSML450
SMD1206P450SLR/12	--	--
SMD1206P500SLR	NanoSMD500LR	MF-NSML500
SMD1206P500SLR/12	--	--
SMD1206P600SLR	nanoSMD600LR	MF-NSML600
SMD1206P700SLR	--	--
SMD1210P200SLR	microSMD200LR	MF-USML200/6
SMD1210P300SLR	--	MF-USML300/6
SMD1210P350SLR	microSMD350LR-D	MF-USML350/6
SMD1210P350SLR/12	--	MF-USML350/12
SMD1210P400SLR	microSMD400LR	MF-USML400/6
SMD1210P450SLR	microSMD450LR	MF-USML450/6
SMD1210P500SLR	microSMD500LR	MF-USML500/6
SMD1210P500SLR/12	--	MF-USML500/12
SMD1210P550SLR	microSMD550LR	MF-USML550/6
SMD1210P600SLR	microSMD600LR	MF-USML600/6
SMD1210P650SLR	--	MF-USML650/6
SMD1210P700SLR	--	MF-USML700/6
SMD1210P750SLR	--	--
SMD1210P900SLR	--	--
SMD1812P260SLR	--	--
SMD1812P300SLR/24	--	--
SMD1812P750SLR/12	--	--
SMD2920P500SLR/24	--	--
SMD2920P600SLR/24	--	--
SMD2920P700SLR	--	--
SMD2920P700SLR/24	--	--

“EVERFUSE” is a registered trademark of Polytronics Technology Corp.

“Multifuse” is a registered trademark of Bourns, Inc.

“PolySwitch” is a registered trademark of TE Connectivity Ltd.